

12


**DAHLGREN DIVISION**  
**NAVAL SURFACE WARFARE CENTER**  
Silver Spring, Maryland 20903-5640



**NSWCDD/TR-94/96**

**HYPERVELOCITY WIND TUNNEL NUMBER 9**  
**HIGH MACH NUMBER DEVELOPMENT PROGRAM**

**BY MELISSA A. LEDERER**  
**STRATEGIC AND SPACE SYSTEMS DEPARTMENT**



**5 DECEMBER 1994**

Approved for public release; distribution unlimited

DTIC QUALITY INSPECTED 8

19950119 056

## FOREWORD

This report documents the High Mach Number Development Program conducted in the Hypervelocity Wind Tunnel Number 9 (Tunnel 9) located at the White Oak, Maryland site of the Dahlgren Division, Naval Surface Warfare Center. The National Aerospace Plane Joint Program Office (NASP JPO) was the project co-sponsor. The primary objective of this program was to investigate the possibility of simply and inexpensively modifying Tunnel 9 to operate at higher Mach numbers.

The author would like to thank the Aerodynamics Branch, K24, and the Aerodynamic Facilities Branch, K23, whose hard work and dedication made this project a success. Special thanks are also given to Satyamoorthi Anandakrishnan, K22, and Dr. William Yanta, K24.

Approved by:

*R. L. Schmidt*

R. L. SCHMIDT, Head  
Strategic and Space Systems Department

Accession For	
NTIS CRA&I	<input checked="" type="checkbox"/>
DTIC TAB	<input type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification .....	
By .....	
Distribution /	
Availability Codes	
Dist	Avail and/or Special
A-1	

## ABSTRACT

This report describes the results of the High Mach Number Development Program performed at the White Oak, Maryland site of the Dahlgren Division, Naval Surface Warfare Center. The goal of this program was to expand the capabilities of the Hypervelocity Wind Tunnel Number 9 (Tunnel 9) to include operation at Mach 18. The constraints of this program involved using the existing Mach 14 setup with as little modification as necessary.

There were two major areas of interest for this program, the heater and the nozzle. The required supply temperature for Mach 18 operation is above the current capabilities of the Tunnel 9 Mach 14 heater. Utilizing supercooled flow conditions lowered the required supply temperature to within the Mach 14 heater capability. The current Mach 14 nozzle was used and the throat section was replaced with a new hardware set designed to achieve the correct nozzle throat-to-exit area ratio to obtain the higher Mach number.

Forty-one runs were carried out in Tunnel 9 in support of this program. The Mach number capability in Tunnel 9 has been extended to Mach 16.5. For this condition the flow has a 30-inch test core with Pitot pressure deviations of -1.1 percent to +1.3 percent and 3.5 seconds of good run time. A Mach 18 capability has also been investigated. Research efforts to achieve acceptable Mach 18 conditions are continuing.

# CONTENTS

	<u>Page</u>
INTRODUCTION .....	1
FACILITY DESCRIPTION .....	2
TEST PHILOSOPHY .....	2
TUNNEL 9 HEATER AND SUPERCOOLING .....	3
MACH 14 NOZZLE MODIFICATIONS .....	4
NOZZLE THROAT HARDWARE .....	4
HARDWARE AND INSTRUMENTATION .....	5
TUNNEL INSTRUMENTATION .....	5
CALIBRATION RAKE .....	5
VERTICALLY TRAVERSING RAKE .....	6
CONE MODEL .....	6
OPTICAL DIAGNOSTICS .....	6
NOZZLE THERMOCOUPLES .....	6
DIFFUSER PROBES .....	7
MICROTUFTS .....	7
BOUNDARY LAYER RAKES .....	7
DATA ACQUISITION .....	8
DATA REDUCTION .....	8
EXPERIMENTAL RESULTS .....	9
RESULTS WITH ORIGINAL MACH 18 THROAT HARDWARE .....	9
RESULTS WITH MACH 18 THROAT HARDWARE SET 2 .....	10
RESULTS WITH MACH 16.5 THROAT HARDWARE .....	11
CFD ANALYSIS .....	11
FUTURE PLANS .....	13
SUMMARY .....	13

## CONTENTS (CONTINUED)

	<u>Page</u>
REFERENCES . . . . .	55
GLOSSARY . . . . .	57
APPENDIX A - DIAGNOSTIC MACH 18 RUNS . . . . .	A-1
EFFECT OF THROAT HARDWARE CONTOUR CHANGES . . . . .	A-1
NEW THROAT . . . . .	A-1
STEP INSERT . . . . .	A-2
EFFECT OF BLOCKAGE . . . . .	A-2
RUNNING WITH A CLEAR TUNNEL . . . . .	A-2
DIFFUSER EFFICIENCY . . . . .	A-3
BOUNDARY-LAYER STATE . . . . .	A-3
INVESTIGATION OF START-UP PROCESS . . . . .	A-4
HIGHER SUPPLY TEMPERATURES . . . . .	A-4
LOWER SUPPLY TEMPERATURES . . . . .	A-4
OVERSIZED CONTOUR . . . . .	A-5

## ILLUSTRATIONS

<u>Figure</u>		<u>Page</u>
1	SCHEMATIC OF HYPERVELOCITY WIND TUNNEL NO. 9 . . . .	15
2	DATA FOR THE DISAPPEARANCE AND ONSET OF CONDENSATION . . . . .	16
3	MACH 14 NOZZLE THROAT SECTION WITH MACH 18 INSERT	17
4	MACH 18 NOZZLE THROAT INLET SECTION . . . . .	18
5	MACH 18 NOZZLE THROAT SECTION . . . . .	19
6	MACH 18 NOZZLE SCREWED INSERT SECTION . . . . .	20
7	MACH 18 NOZZLE THROAT INLET SECTION: AS BUILT AND AFTER 8 RUNS . . . . .	22
8	MACH 18 NOZZLE THROAT SECTION: AS BUILT AND AFTER 8 RUNS . . . . .	23
9	MACH 18 NOZZLE SCREWED INSERT SECTION: AS BUILT AND AFTER 8 RUNS . . . . .	24
10	EFFECT OF THROAT CONTOUR CHANGE ON FLOW PROFILE .	25
11	MACH 16.5 NOZZLE THROAT SECTION CONTOUR . . . . .	26
12	SCHEMATIC OF TEST SET-UP WITH FIXED AND TRAVERSING PITOT RAKES . . . . .	27
13	PHOTOGRAPH OF CALIBRATION AND TRAVERSING PITOT RAKES INSTALLED IN TUNNEL 9 . . . . .	28
14	BLUNT CONE INSTRUMENTATION . . . . .	29
15	LASER LIGHT SCATTERING OPTICS . . . . .	30
16	LOCATION OF NOZZLE WALL THERMOCOUPLES . . . . .	31
17	LOCATION OF DIFFUSER CONE STATIC PROBES . . . . .	32
18	SHORT BOUNDARY-LAYER PITOT RAKE . . . . .	33
19	LONG BOUNDARY-LAYER PITOT RAKE . . . . .	34
20	ORIENTATION OF CALIBRATION RAKE AND STRUT MOUNTED INSTRUMENTATION . . . . .	35
21	TYPICAL SUPPLY CONDITIONS FOR TUNNEL 9 HIGH MACH NUMBER OPERATION . . . . .	36
22	PHOTOMULTIPLIER SIGNAL VS. TIME . . . . .	37
23	NORMALIZED PITOT PRESSURE VS. DISTANCE FROM CENTERLINE FOR RUN 2274 . . . . .	38
24	NORMALIZED PITOT PRESSURE VS. DISTANCE FROM CENTERLINE FOR RUN 2338 . . . . .	38

## ILLUSTRATIONS (CONTINUED)

<u>Figure</u>		<u>Page</u>
25	NORMALIZED PITOT PRESSURE VS. DISTANCE FROM CENTERLINE FOR RUN 2341 . . . . .	39
26	NORMALIZED PITOT PRESSURE VS. DISTANCE FROM CENTERLINE FOR RUN 2343 . . . . .	39
27	NORMALIZED PITOT PRESSURE VS. DISTANCE FROM CENTERLINE FOR RUN 2374 . . . . .	40
28	NORMALIZED PITOT PRESSURE VS. DISTANCE FROM CENTERLINE FOR RUN 2377 . . . . .	40
29	NORMALIZED PITOT PRESSURE VS. DISTANCE FROM CENTERLINE FOR RUN 2379 . . . . .	41
A-1	NORMALIZED PITOT PRESSURE VS. DISTANCE FROM CENTERLINE FOR RUN 2347 . . . . .	A-6
A-2	MACH 14 NOZZLE THROAT SECTION WITH MACH 18 INSERT . . . . .	A-7
A-3	MACH 18 STEP INSERT HARDWARE . . . . .	A-8
A-4	NORMALIZED PITOT PRESSURE VS. DISTANCE FROM CENTERLINE FOR RUN 2349 . . . . .	A-9
A-5	NORMALIZED PITOT PRESSURE VS. DISTANCE FROM CENTERLINE FOR RUN 2370 . . . . .	A-9
A-6	DIFFUSER PROBE DATA . . . . .	A-10
A-7	BOUNDARY LAYER PITOT DATA . . . . .	A-11
A-8	PHOTOGRAPH OF MICROTUFTS . . . . .	A-12
A-9	TEST CELL PRESSURE VS. TEMPERATURE PLOT FOR MACH 18 . . . . .	A-13
A-10	NORMALIZED PITOT PRESSURE VS. DISTANCE FROM CENTERLINE FOR RUN 2375 . . . . .	A-14

## TABLES

<u>Table</u>		<u>Page</u>
1	HARDWARE SET THROAT DIAMETERS . . . . .	42
2	ESTIMATED UNCERTAINTIES . . . . .	43
3	RUN MATRIX . . . . .	46
4	TUNNEL 9 FLOW UNIFORMITY CALIBRATION FOR RUN 2274 .	49
5	TUNNEL 9 FLOW UNIFORMITY CALIBRATION FOR RUN 2343 .	50
6	TUNNEL 9 FLOW UNIFORMITY CALIBRATION FOR RUN 2374 .	51
7	TUNNEL 9 FLOW UNIFORMITY CALIBRATION FOR RUN 2377 .	52
8	TUNNEL 9 FLOW UNIFORMITY CALIBRATION FOR RUN 2379 .	53
9	NOMINAL TEST CELL AND SUPPLY CONDITIONS FOR MACH 16.5 . . . . .	54
10	NOMINAL TEST CELL AND SUPPLY CONDITIONS FOR MACH 18 . . . . .	54
A-1	TUNNEL 9 FLOW UNIFORMITY CALIBRATION FOR RUN 2347 .	A-15
A-2	TUNNEL 9 FLOW UNIFORMITY CALIBRATION FOR RUN 2349 .	A-16
A-3	TUNNEL 9 FLOW UNIFORMITY CALIBRATION FOR RUN 2370 .	A-17
A-4	TUNNEL 9 FLOW UNIFORMITY CALIBRATION FOR RUN 2375 .	A-18



## INTRODUCTION

This report documents the High Mach Number Development Program conducted in the Hypervelocity Wind Tunnel Number 9 (Tunnel 9) located at the White Oak, Maryland site of the Dahlgren Division, Naval Surface Warfare Center. The National Aerospace Plane Joint Program Office (NASP JPO) at Wright Patterson Air Force Base co-sponsored the program.

It has been recognized that there is a need for high Mach number facilities to support NASP and other hypersonic programs. The purpose of this study was to determine if Tunnel 9 could be simply and inexpensively modified to operate at higher Mach numbers. The goal of this development program was to achieve Mach 18 flow.

Critical components of any hypersonic wind tunnel are the heater and nozzle. The heater must heat the gas sufficiently to avoid the presence of condensate in the flow as the flow accelerates and expands through the nozzle. The required supply temperature for Mach 18 operation is above the current capability of the Tunnel 9 Mach 14 heater. Thus, the first objective was to determine if the use of supercooling could lower the supply temperature requirements to within the current heater capabilities and produce valid aerodynamic results. This would eliminate the need for a redesign of the heater package.

The second objective of this program was to avoid the manufacture of a new nozzle by replacing the existing Mach 14 nozzle throat section with a new hardware set designed to achieve the correct nozzle throat-to-exit area ratio. Tunnel 9 uses interchangeable contoured nozzles that can cost upwards of one million dollars. With a cost of approximately 30 thousand dollars, nozzle throat inserts are more cost effective. Testing was required to determine if the flow was of sufficient quality to support aerodynamic testing.

## FACILITY DESCRIPTION

All testing was conducted in the Navy's Hypervelocity Wind Tunnel No. 9. This is a blow-down type facility that uses nitrogen as the working fluid. The use of three interchangeable contoured nozzles allows for testing at Mach numbers of 8, 10 and 14, with maximum Reynolds numbers of approximately 52 million per foot, 20 million per foot and 4 million per foot, respectively. For Mach numbers of 10 and 14 the nozzle exit and test cell are five feet in diameter. The Mach 8 configuration has a nozzle exit diameter of 33 inches and a test cell diameter of five feet. This test section can accommodate large hypersonic test models. Figure 1 is a schematic of the facility.

Before the run, nitrogen is pumped into a set of three driver vessels. During this pumping cycle, the test cell, nozzle diffuser and vacuum sphere are evacuated to a pressure of approximately 1 mmHg. The heater vessel is pressurized with a fixed quantity of gas from the driver vessel. This gas is then heated to the required tunnel supply temperature.

Two metal diaphragms upstream of the throat separate the high temperature, high pressure gas in the heater from the evacuated nozzle and the test cell region. A tunnel run is initiated by bleeding high pressure gas from the driver vessels into the region between the diaphragms, causing the downstream diaphragm to burst. A large pressure differential then causes the upstream diaphragm to burst, causing the flow to start. As the hot gas flows out of the top of the heater, relatively cold high pressure gas from the driver vessels enters the bottom of the heater vessel. This cooler gas acts as a fluid piston to maintain steady supply conditions. The run ends and the tunnel shuts down after the fixed volume of working fluid is exhausted and the supply temperature and pressure begin to decrease. For detailed information concerning Tunnel 9 operation, see Reference 1.

## TEST PHILOSOPHY

Development efforts were carried out for Mach numbers of 16.5 and 18. Modifications to two primary tunnel components, the heater and the Mach 14 nozzle, were required to carry out this program. The following sections will discuss each of these separately.

## TUNNEL 9 HEATER AND SUPERCOOLING

Currently, the Tunnel 9 Mach 14 heater has an upper operating limit of 3700° R. The required supply temperature for Mach 18 operation is 4300°R. To make use of the Mach 14 heater, the phenomenon of supercooling was used to lower the required supply temperature. Supercooling refers to the existence of a nonequilibrium pure phase state with the physical properties of a different equilibrium phase at a lower temperature. This phenomenon has been investigated and documented for both large and small hypersonic nozzles.<sup>2</sup> For this paper, degrees supercooling are defined as the number of degrees the calculated perfect gas free-stream temperature is below the equilibrium saturation temperature, calculated from the Clausius-Clapeyron Equation (1), at a given pressure.

$$\ln (P * 6893.25) - 22.527 = \frac{-1486.8}{T} \quad (1)$$

Supercooling can have a significant role in the development of hypersonic facilities. Reducing the required free-stream temperature also reduces the required supply temperature. Equation 2 shows the relationship between free-stream temperature and supply temperature.

$$\frac{T}{T_o} = \left( 1 + \frac{\gamma - 1}{2} M^2 \right)^{-1} \quad (2)$$

For example, at Mach 18, for each 1° R of supercooling used, the required supply temperature is reduced by 66°R. Thus, by incorporating 15°R of supercooling, the required supply temperature is reduced to 3310° R which is within the operating limits of the existing Tunnel 9 heater.

A comprehensive program has been carried out to explore the phenomenon of supercooling. Calibration models and cone models have been tested in condensation-free supercooled flow at Mach 14 in Tunnel 9 and at Mach 18 in Tunnel 8A. References 3 - 6 discuss these studies. Results from these tests revealed that the test cell flow in Tunnel 9 does not condense until over 48°R of supercooling has been used and that valid aerodynamic data can be obtained with up to 25°R of supercooling.

Figure 2 shows a compilation of data obtained in supercooling studies at NSWCDD. The line to the far right represents the sublimation (or saturation) line for nitrogen as defined by Equation 1. The line labeled "experimental condensation onset curve" is a boundary observed in studies performed by Daum and Gyarmathy in which the supercooling phenomenon was observed in a variety of wind tunnels.<sup>2</sup> There are two types of data shown in the plot. Those points that are labeled as "OPER PTS" represent the actual free-stream values obtained in Tunnel 9 operation at the condition indicated. The remaining data points represent the states of condensation onset or disappearance as observed in NSWCDD wind

tunnels. The figure shows that the Mach 16.5 and Mach 18 operating points do not reach the boundary expressed by the onset and disappearance of condensation. These points are in the supercooled region.

## MACH 14 NOZZLE MODIFICATIONS

Tunnel 9 uses large axisymmetric contoured nozzles. For Mach 14 operation, the nozzle is 40 feet long with a throat diameter of 1 inch and an exit diameter of 60 inches. Rather than design and fabricate an entirely new higher Mach number nozzle, three sections in the throat region of the existing Mach 14 nozzle were replaced. Figure 3 shows the first 3 feet of the existing Mach 14 nozzle and a superimposed outline of a new higher Mach number contour (the inner contour). In this figure, the replaced sections are the subsonic inlet section, the throat section and the screwed insert which are labeled 1, 2 and 3, respectively. The throat section was redesigned to yield Mach 18 flow at the fixed nozzle exit diameter of five feet. The new parts were smoothly contoured into the existing nozzle hardware by matching the first and second derivatives of the contour coordinates. The design throat diameter for Mach 18 operation is 0.525 inches. Later in the program a Mach 18 throat was modified to produce Mach 16.5 flow. The design throat diameter for Mach 16.5 operation is 0.628 inches.

## NOZZLE THROAT HARDWARE

Six sets of Mach 18 throat hardware were manufactured. Drawings and contour coordinates for each piece, as designed, are shown in Figures 4 - 6. Hardware set 1 was manufactured by Smackover, Inc. Sets 2 through 6 were manufactured by B-J Enterprises, Inc. The as-built minimum throat diameter for each hardware set is listed in Table 1.

To observe the effect of contour changes on the test cell flow profile, dimensional analyses were performed following each run. Typically, during the first few runs in Tunnel 9 a new throat will decrease in diameter. The operating temperatures are high enough to cause the material to expand. The throat hardware is constrained such that it must expand inward toward the centerline. Thus, by expanding, the throat decreases radially. After the eighth run on hardware set 1, the dimensional changes were within the measurement error ( $\pm 0.003$  inches) and no additional measurements were taken. The final minimum throat diameter was 0.4959 inches representing a decrease of 0.0303 inches in throat diameter. Figures 7 - 9 are graphs showing the contour of the as-built hardware and the contour after eight runs. From calibration data it was determined that the dimensional changes in the throat do not appreciably affect the flow field. Figure 10 shows non-dimensional pressure data from the traversing rake for runs with the original throat contour and the contour after 12 runs.

Later in the program, the throat piece of hardware set 3 was modified to lower the resulting free-stream Mach number to 16.5. The modification, which involved drilling a constant area cylindrical section out of the throat region, was performed in-house. Figure 11 is a graph showing the contour of throat 3 following the modification.

When originally received, hardware set 6 did not meet specifications and was returned to the manufacturer for remachining. This hardware was machined with a new oversized contour. This oversized contour was designed to account for radial changes experienced during the first runs on a new throat. Details on this contour are provided in Reference 7.

## HARDWARE AND INSTRUMENTATION

### TUNNEL INSTRUMENTATION

Measured tunnel conditions are supply pressure, supply temperature and Pitot pressure. Supply pressure is measured with a Viatran 214 transducer with a range of 0 - 50,000 psia. Supply temperature is measured using two tungsten-5 percent rhenium/tungsten-26 percent rhenium thermocouples, each with a range of 0 - 4200°F. Values from both thermocouples are averaged. When using the 25 probe calibration rake, two of the probes located in the core region (one on each side of the centerline) are averaged to obtain Pitot pressure measurements. When the cone model was installed, two strut mounted Pitot probes, installed 18 inches from the tunnel wall, were used. A schematic of the test cell is shown in Figure 12.

### CALIBRATION RAKE

To perform the flow calibrations, a 25-Pitot probe, fixed rake was installed horizontally in the test cell and positioned at various axial locations downstream of the nozzle exit plane. The Pitot probes are spaced 2 inches apart. Pressure measurements were made using Kulite XCW-093-15A gages.<sup>1</sup> These are miniature, fast response transducers. Temperature compensation was provided to avoid any possible drift of gage readings due to calibration rake heating. An excitation voltage of 10 Volts was maintained and monitored throughout the program. A photograph of the calibration rake is shown in Figure 13.

## VERTICALLY TRAVERSING RAKE

A vertically traversing rake was configured with 3 Pitot probes spaced 1 inch apart, horizontally. For all runs in this series the traverse was mounted on top of the tunnel at window station one. The probes were located 12 inches downstream of the nozzle exit plane as shown in Figures 12 and 13. Data from the probes was used to compare the repeatability between runs. The traverse had various paths of travel that were run dependent. Typically the probe traversed from 4 inches above the centerline upward to a location approximately 2 inches from the tunnel wall. Pitot pressure measurements were made with Kulite XCW-093-15A gages.<sup>1</sup>

## CONE MODEL

Previous supercooling studies indicated that a blunt-nosed body is more sensitive to the effects of supercooling than a sharp nosed body.<sup>5</sup> To obtain data on an aerodynamic configuration, a blunt-nosed 7° half-angle cone was used. The cone has a length of 47 inches, a base diameter of 14.4 inches and a bluntness ratio of 22.31 percent. The model was placed in window station 1 such that the nose of the cone was positioned 24 inches downstream of the nozzle exit plane. Instrumentation consisted of the 9HV6-5 force balance, 24 PTQH 0-5 psia transducers and 21 coaxial thermocouples. The force balance is a force-force balance manufactured by the Abel Corporation.<sup>1</sup> Maximum load capabilities are as follows: 2000 lb. in normal force, 1000 lb. in yaw force, 600 lb. in axial force and 800 in-lb. in rolling moment. PTQH pressure transducers are solid state gages with good linearity for pressures as low as 10 microns.<sup>1</sup> The thermocouples are commercially available surface temperature gages from Medtherm Corporation. Heat transfer rates were calculated using the one-dimensional heat conduction equation for a planar slab.<sup>1</sup> The instrumentation layout is shown in Figure 14.

## OPTICAL DIAGNOSTICS

To monitor the presence of condensation, an optical system to detect back-scattered laser light from condensation particles was implemented. This system has been used successfully in previous Tunnel 9 testing<sup>3</sup> and consisted of a 3 mW Helium-Neon laser, a photomultiplier and collecting optics. A schematic of this system is shown in Figure 15.

## NOZZLE THERMOCOUPLES

The nozzle wall was instrumented with six coaxial thermocouples to measure wall heating and ascertain the boundary-layer state. All gages are located on the left side (facing

upstream) of the nozzle. Thermocouple locations are shown as axial distances from the throat in Figure 16.

## DIFFUSER PROBES

Three cone-static probes were installed in the diffuser pipe to determine the Mach number and static pressure of the flow in this region. The axial locations are shown in Figure 17.

## MICROTUFTS

Fluorescent microtufts were added to the tunnel wall to provide flow visualization in the wall boundary-layer region. Nylon monofilament material was dyed with Leucophor EFR that fluoresces when excited by ultraviolet light. Since the fluorescence is in the visible spectrum, images can be captured on standard photographic film. Tufts were applied on the tunnel wall in a matrix consisting of 20 rows and 31 columns. The tufts were cut horizontally into 1 inch segments with 1 inch vertical spacing. Four exposures were obtained during the run at times 0.8, 0.9, 1.2 and 1.4 seconds after the tunnel start-up. Additional information on the microtuft procedure for Tunnel 9 is contained in Reference 8.

## BOUNDARY LAYER RAKES

Two boundary layer rakes were installed in the test cell. The first rake was positioned in window station one. The rake is 6 inches long and contains 8 Pitot probes as shown in Figure 18. The second rake, positioned in window station three, is 22 inches in length with 14 Pitot probes as shown in Figure 19. Pitot pressure measurements were made using Kulite XCW-093-15A gages.<sup>1</sup> The orientation of all rake and strut mounted instrumentation is shown in Figure 20.

## DATA ACQUISITION

Data were obtained with the Data Acquisition and Recording Equipment (DARE) VI. DARE VI is a simultaneous-sample-and-hold, single amplifier per channel system with 14 bit resolution. The output signals from all of the instrumentation were amplified and fed through 25 Hz, lowpass, analog, six-pole Bessel filters. Data were recorded on each channel at 250 samples per second.

Pressure transducers were calibrated prior to each run. The transducers were compared to MKS Baratron reference transducers that monitor the test cell pressure. During the vacuum pumpdown sequence, the pressure was held constant momentarily at suitable levels to allow for data recording. The interval between the conclusion of the pumpdown sequence and the actual run was up to 20 minutes in length. A final tare reading was taken just prior to the run to correct for any zero shift that may have occurred during this time. A linear least squares method was used to calculate a slope and an intercept for each transducer.

## DATA REDUCTION

All data were reduced using standard NSWCDD codes. In addition to the 25 Hz analog filters used during data acquisition, the data were filtered with lowpass sixth order Butterworth digital filters during data reduction. The cutoff frequency was 10 Hz for all data channels excluding balance gage channels. The cutoff frequencies for balance gage channels are as follows:

Normal Force	5 Hz	Pitching Moment	5 Hz
Side Force	3 Hz	Yawing Moment	3 Hz
Axial Force	5 Hz	Rolling Moment	3 Hz

An estimate of the uncertainties involved in measuring Tunnel 9 flow parameters was previously conducted.<sup>9</sup> The measured and derived properties' uncertainties in terms of percentage errors are contained in Table 2.



## EXPERIMENTAL RESULTS

To date, 41 runs have been made in support of this program. Additionally, four runs with hardware set 2 were made with a NASP 2-D inlet as part of the NASP JPO Government Work Package, GWP 43 (WTR 1609). A complete run matrix is given in Table 3.

Figure 21 shows a trace of the supply pressure and supply temperature for a typical Tunnel 9 run. There are approximately 3.5 seconds of good flow for each run. Figure 22 shows a typical trace of the photomultiplier signal. During the tunnel start-up, condensation is present causing the photomultiplier to output a large voltage signal. When steady flow conditions are established the condensation disappears, causing the strength of the signal to decrease and return to the prerun ambient level. When the run was near completion and the supply temperature decreased, condensation was again present and the signal returned. At Mach 16.5 and Mach 18 conditions the run time and shutdown process are relatively long. Since data was only acquired for six seconds, the onset of condensation at the end of the run is not visible in the data trace. However, this event was verified using an oscilloscope. All of the runs in this test series were condensation-free (in the test cell) during steady flow.

### RESULTS WITH ORIGINAL MACH 18 THROAT HARDWARE

The first series of runs (2271 - 2276) were made with hardware set 1. The distribution of normalized Pitot pressure across the test core for run 2274 is shown in Figure 23. Pressures were normalized with the average of the pitot pressures located  $\pm 8$  inches from the centerline. Tabulated data for this run are shown in Table 4. All data were averaged over the useful run time. The core was approximately 24 inches, but due to the resolution of the Pitot probes, the border between the boundary layer and the core can only be determined within  $\pm 2$  inches. The Pitot pressure is 4.94 psia with a variation of -3.4 percent to +2.1 percent. These results are consistent with the results from the Mach 14 calibrations at a Reynolds number of  $2.03 \times 10^6$  per foot (see Reference 10).

Near the end of run 2274 the sheath of a supply thermocouple melted causing damage to the throat insert of hardware set 1. In an attempt to repair the damage, the throat hardware was returned to the manufacturer for remachining. Since the throat diameter had decreased, when material was removed from the throat to repair the damage, the throat was returned to its original diameter. The second series of runs (2293 - 2295) were made with hardware set 1 after the throat piece had been remachined. It was hoped that after the hardware had been refurbished it would produce results similar to those from the initial runs. However, residual stresses locked in the material altered the expansion characteristics of the material and the data profile was drastically altered by the throat damage and hardware

remachining. The core size was reduced from 24 inches to 20 inches and the flow character was more asymmetric. The Pitot pressure deviations had increased to -6.2 percent to +1.5 percent. This set of throat hardware was determined to no longer be suitable for testing and has since been taken out of service.

The purpose of the next series of runs (2299 to 2309) was to address facility issues associated with higher Mach number operation of Tunnel 9. Before a Mach 18 upgrade could be put fully into a production capability, some questions concerning the endurance of tunnel hardware needed to be addressed. Since the Mach 18 throat diameter is only 1/2 the diameter of the Mach 14 throat, the mass flow is decreased by a factor of four. With this reduced mass flow and increased run time, the heat soak on the facility hardware is much more severe. The exposure of parts to extreme temperature for four times longer has resulted in diminished hardware lifetimes.

## RESULTS WITH MACH 18 THROAT HARDWARE SET 2

Results from the initial series of runs suggested continuation of this project. Since the original throat had to be taken out of service, testing continued using a new set of throat hardware. Hardware set 2 was first tested during runs 2338 - 2341 on a NASP 2-D inlet. Due to the presence of the test model, the calibration rake could not be installed. The vertically traversing rake was operated for each of these runs and flow profiles were obtained. Run 2338 has a test core of 30 inches and a Pitot pressure of 4.008 psia with a deviation of -1.41 percent to +2.23 percent. Normalized data for this run is contained in Figure 24. Although this run provided encouraging results, the three subsequent runs had very different profiles. The flow had a test core of only 20 inches and much larger deviations in Pitot pressure. Figure 25 contains data from one of these runs (2341) showing a Pitot pressure of 4.67 psia with deviations of -7.6 percent to +6.5 percent.

At this point, the assumption was made that the first run on throat set 2 (run 2338) was the nominal Mach 18 flow to expect. It was assumed that the poorer flow quality obtained in the subsequent runs was the result of some anomaly that needed to be accounted for and corrected. The calibration rake was installed for runs 2343 - 2346. The objective of these runs was to document the flow profile at various tunnel stations as noted in Table 3. The flow profile observed in run 2338 was not duplicated in any of these runs. Data for run 2343 is shown in Figure 26 of normalized Pitot pressures and in Table 5.

The remaining Mach 18 runs were made in an attempt to repeat the flow profile observed on run 2338 and to explain the flow character observed on subsequent runs. Factors that could produce the observed anomalies were identified and tests were run to determine their impact on flow quality. This series of diagnostic runs is described in Appendix A.

During the diagnostic series two types of flow profiles had been observed. Most of the runs have a 20-inch core with large deviations in the radial distribution of flow properties while a minority of runs have a 30-inch core with smaller deviations. Since no cause for this anomaly was determined during the diagnostic series two courses of action were pursued. The first was to utilize recently acquired CFD codes to examine the Mach 18 flow profile anomalies. The results from this effort will be discussed later. The second was to explore a lower Mach number. By lowering the Mach number we would not be using as much supercooling and not running the tunnel and nozzle so far off design.

## RESULTS WITH MACH 16.5 THROAT HARDWARE

As discussed previously under NOZZLE THROAT HARDWARE, the throat piece of hardware set 3 was modified to produce Mach 16.5 flow. Run 2373 was the first run with this modified throat and the results were verified with the repeat run, 2374. The resulting flow had a core size of 24 inches and a Pitot pressure of 6.6 psia with deviations of -5.3 percent to +1.3 percent as shown in Figure 27 and Table 6.

Run 2377 was a calibration run for Mach 16.5 at station 2. Flow quality improved in this station. The core is 28 inches and the Pitot pressure is 6.38 psia with deviations of -1.1 percent to +1.3 percent. Data for this run is provided in Figure 28 and Table 7.

Station 3 was to be calibrated during run 2378. However, the flow had a 40-inch core and the run proved to be anomalous. Run 2379 was made immediately after run 2378 and the flow in station 3 correlated well with the calibrations at stations 1 and 2. The core size is 30 inches and the Pitot pressure is 5.96 psia with deviations of -0.9 percent to +4.1 percent. Data is contained in Figure 29 and Table 8.

To complete the calibration of the Mach 16.5 throat, data was taken on an aerodynamic shape. The blunt cone model was installed to obtain force and moment, pressure and heat transfer data. The data correlated well with nonsupercooled data taken at Mach 14 and predictions at Mach 18. No anomalies were discovered. Summaries of flow conditions for Mach 16.5 and Mach 18 are provided in Tables 9 and 10, respectively.

## COMPUTATIONAL FLUID DYNAMICS (CFD) ANALYSIS

Computational Fluid Dynamics (CFD) codes were used together with experimental results to analyze the resulting flow. The codes were obtained through a Memorandum of Agreement with NASA-Langley Research Center. The codes, NASCRIN and EXP2DS, utilized a full Navier-Stokes (NS) solution over the Subsonic-Transonic region of the nozzle and a Parabolized Navier-Stokes (PNS) solution over the supersonic-hypersonic region of the nozzle. Test cases were performed at Mach 14 to verify the accuracy of the codes (see

References 11 and 12). Additional information on this analysis is contained in References 11 and 13.

The first issue explored was the nozzle wall boundary layer state. To determine if the two different types of profiles obtained exhibited two different boundary layer states, nozzle wall heat transfer rates were generated for laminar and turbulent boundary layers. Using nozzle wall thermocouple measurements in conjunction with CFD predictions, it was determined that the nozzle wall boundary layer is in a turbulent state for all runs.

The codes were run for both Mach 18 and Mach 16.5 flow at station 1. For both throat contours, the code predictions agreed with the experimental profile data except for runs 2338, 2343, 2370 and 2378 as described in Reference 13. These runs exhibited a larger uniform core with smaller Pitot pressure uniformity deviations where as the remaining runs exhibited smaller cores with larger Pitot pressure deviations.

The CFD calculations offered an explanation for the behavior on the majority of the runs. For the Mach 18 throat, the nozzle actually overexpands the flow along the nozzle centerline to a Mach number of 24. A system of weak oblique shock waves then compress the flow resulting in an exit Mach number of 17.5. The 20-inch core size results from the intersection of these oblique shock waves with the test cell 10 inches from the centerline. The Mach 16.5 throat also overexpands the flow along the nozzle centerline but the maximum Mach number is only 20. For this case oblique shocks are present but they are much weaker. The Mach 16.5 core size is larger (24 inches) and the deviations are reduced from the Mach 18 configuration.

A possible explanation for the runs that produced a free-stream flow with a larger core and a flatter profile (runs 2338, 2343, 2370 and 2378) assumes condensation in the flow upstream of the test cell. Although the optical detecting system showed the test cell region to be condensation free, no measurements were taken in the nozzle. The presence of condensation in the nozzle would lower the centerline Mach number resulting in little or no overexpansion. In the absence of overexpansion, no oblique shock waves are formed resulting in a larger core size and less variation in flow properties. Condensation upstream of the test cell might be induced by the presence of water vapor or other particles.

A possible source of water vapor might occur when the heater is exposed to atmosphere for an extended period. Prior to making a tunnel run, the heater vessel is evacuated to approximately 1 mmHg. The heater typically remains isolated from atmosphere until it is opened for maintenance or to change the heater package for a different Mach number. Runs 2338 and 2370 followed runs with different Mach numbers. In both cases the heater had to be opened to install the Mach 14 heater package. Prior to run 2343 there was a 3-month break in tunnel operation and the heater had been opened during this period for routine maintenance. Before run 2378 the heater had been opened to install thermocouples and replace the heater element as part of an in-house study of heater vessel temperatures. Thus, there is a possibility that when the heater package is exposed to atmosphere, air or water vapor molecules attach to the graphite liner or heater element. During the first run following exposure, these contaminants, if present, are outgassed into the pure nitrogen

working gas. The flow contaminants would stimulate the condensation process thus altering the flow expansion process and the resulting flow profile. This theory has not yet been proved but will be studied more in the future. For the time being, the Mach 16.5 condition is less stringent and provides acceptable flow quality.

## FUTURE PLANS

Future efforts for improving flow quality will investigate optimizing the nozzle throat insert design. New throat contours will be designed to eliminate overexpansion of the flow in the nozzle. CFD codes will be used to evaluate the flow produced by these new contours.

Additional measurements are planned to study various flow characteristics. In the test cell, independent measurements of flow properties will be made to determine any deviation from equilibrium. A laser directed upstream along the nozzle centerline will be used along with light scattering optics to detect the presence of condensation in the tunnel nozzle.

## SUMMARY

The study described in this report shows that it is possible to use supercooling together with a modified nozzle throat section to increase the Mach number capability of a hypersonic facility without major alterations. The phenomenon of supercooling has been used to reduce the required supply temperature from 4300°R to 3225°R. This allows the existing Tunnel 9 Mach 14 heater to be used without modification. Also, a modified throat section was installed in the existing Mach 14 nozzle to produce the proper throat-to-exit area ratio required for Mach 16.5 and Mach 18 flow.

Forty-one runs have been made to support this program. For the Mach 16.5 throat, approximately 15°R of supercooling was utilized. The resulting flow has a 28-inch core with deviations in Pitot pressure of -1.1 percent to +1.3 percent. The run time is approximately 3.5 seconds. Laser light scattering was used to monitor the presence of condensation. The flow was observed to be in a supercooled state and the free-stream flow was condensation free in the test cell.

This method of replacing throat inserts has proven to be very successful in upgrading the capability of Tunnel 9. Future studies will use advanced CFD methods to optimize nozzle throat contours in an attempt to eliminate overexpansion of the flow in the nozzle and to improve flow quality.

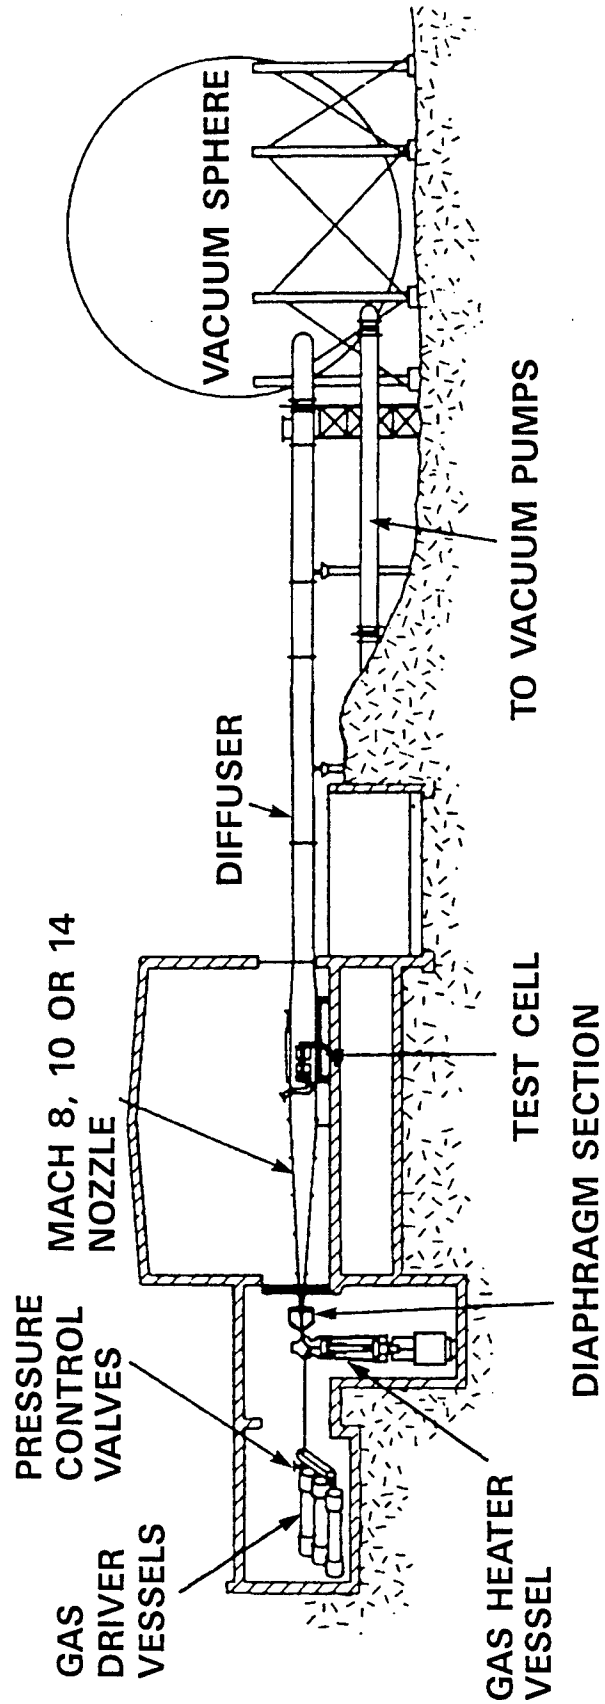


FIGURE 1. SCHEMATIC OF HYPERVELOCITY WIND TUNNEL NO. 9



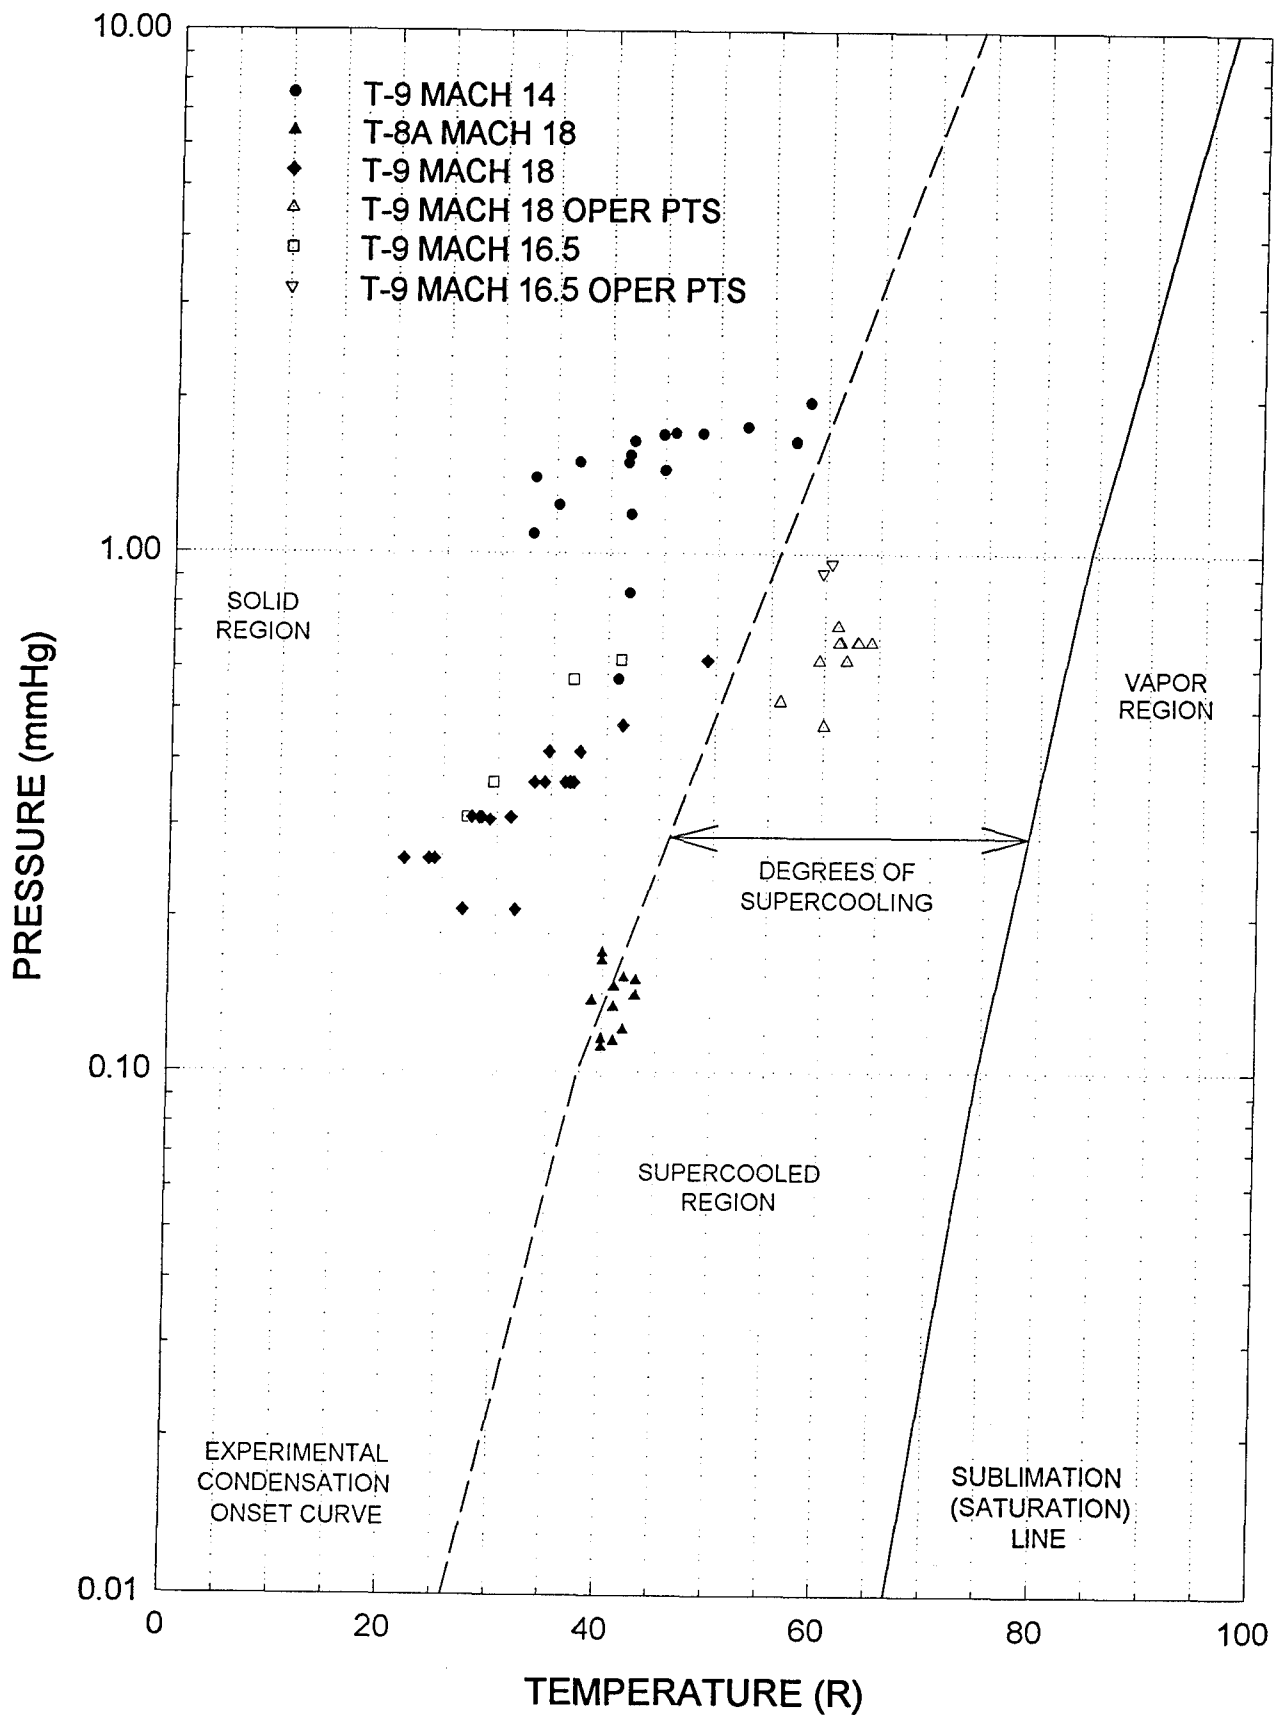


FIGURE 2. DATA FOR THE DISAPPEARANCE AND ONSET OF CONDENSATION

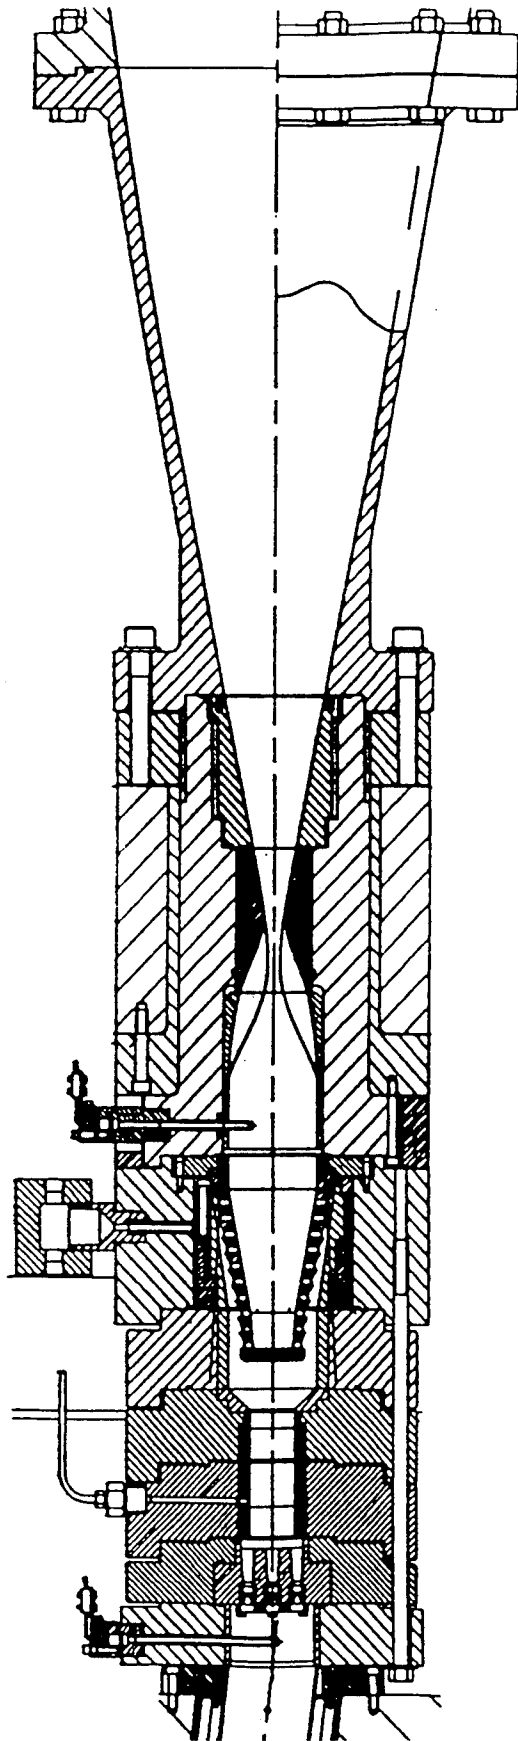

1 2 3

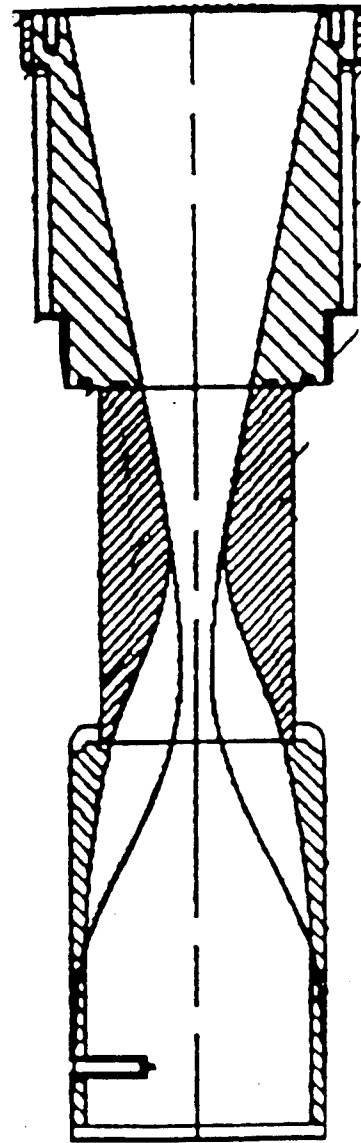

18 IN.

MACH 14 THROAT  
DIAMETER = 1.0 IN.  
MACH 16.5 THROAT  
DIAMETER = 0.6284 IN.  
MACH 18 THROAT  
DIAMETER = 0.526 IN.

FIGURE 3. MACH 14 NOZZLE THROAT SECTION WITH MACH 18 INSERT







FIGURE 5. MACH 18 NOZZLE THROAT SECTION




FIGURE 6. MACH 18 NOZZLE SCREWED INSERT SECTION

FIGURE 6. (CONTINUED)

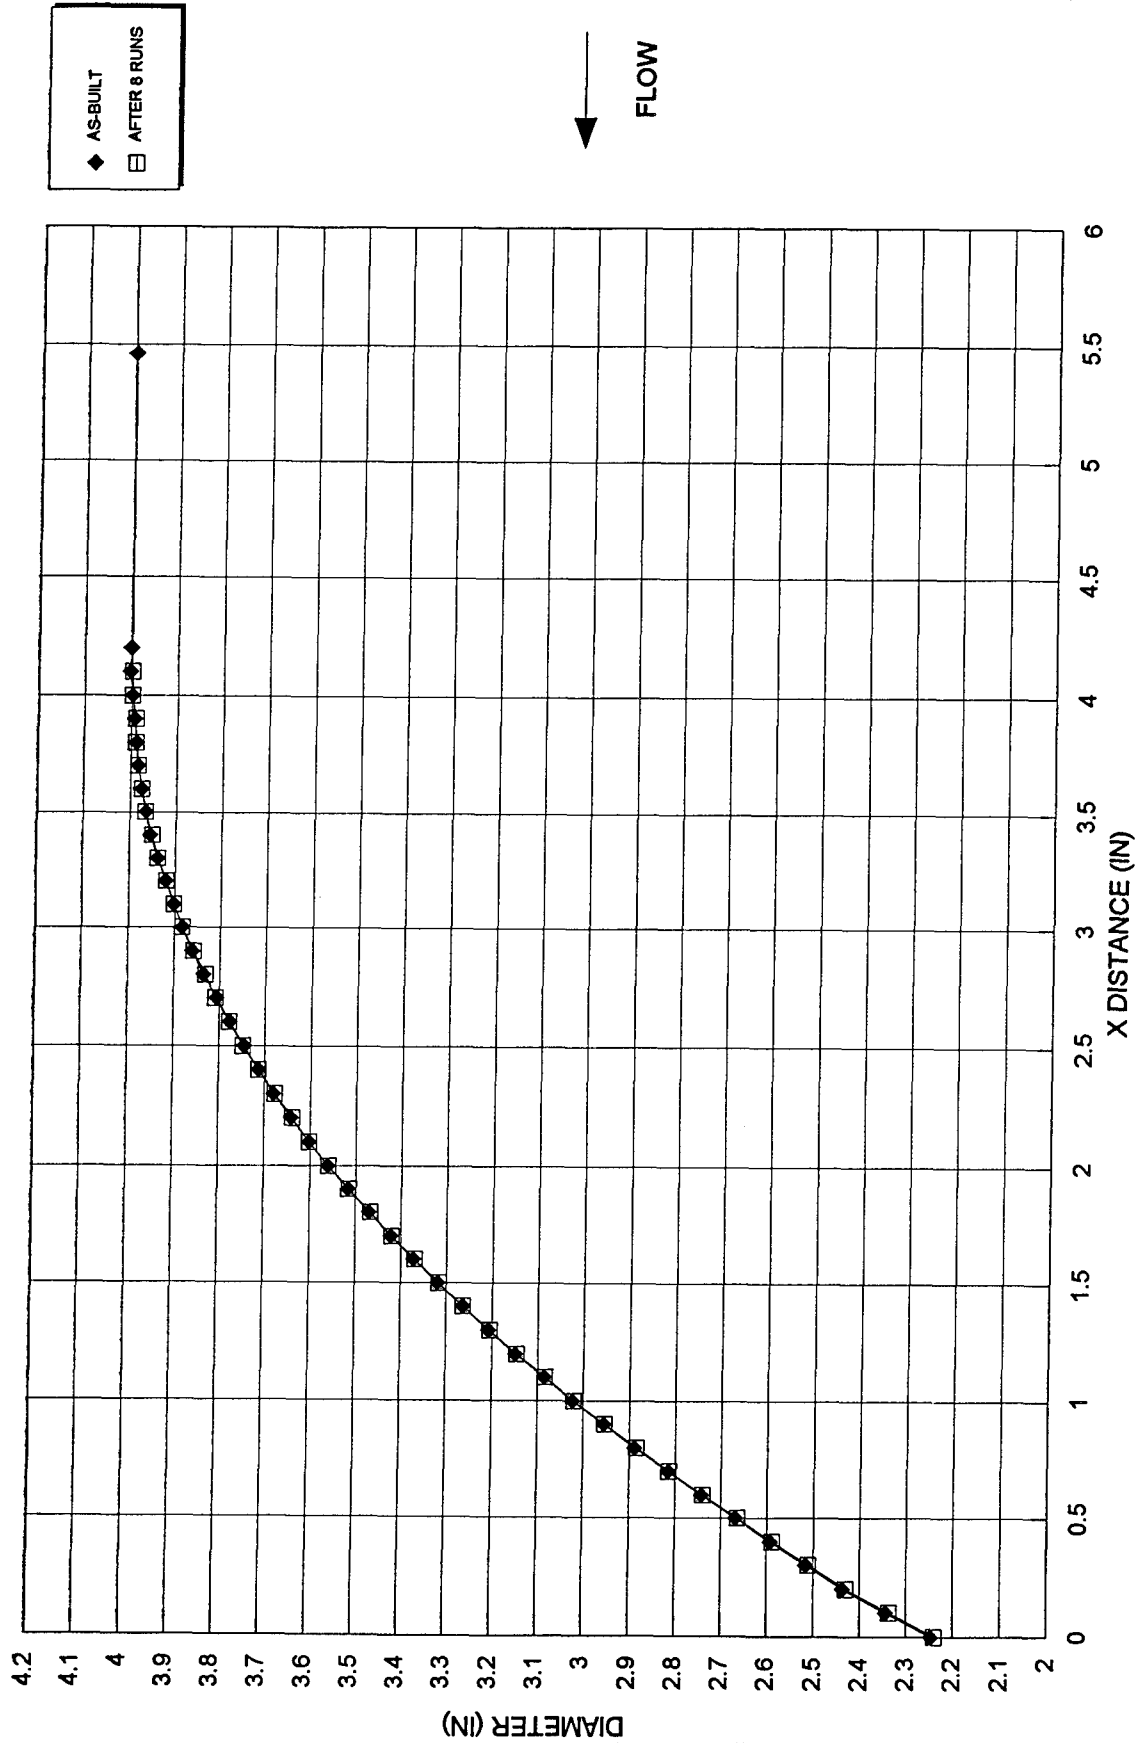


FIGURE 7. MACH 18 NOZZLE THROAT INLET SECTION: AS BUILT AND AFTER 8 RUNS

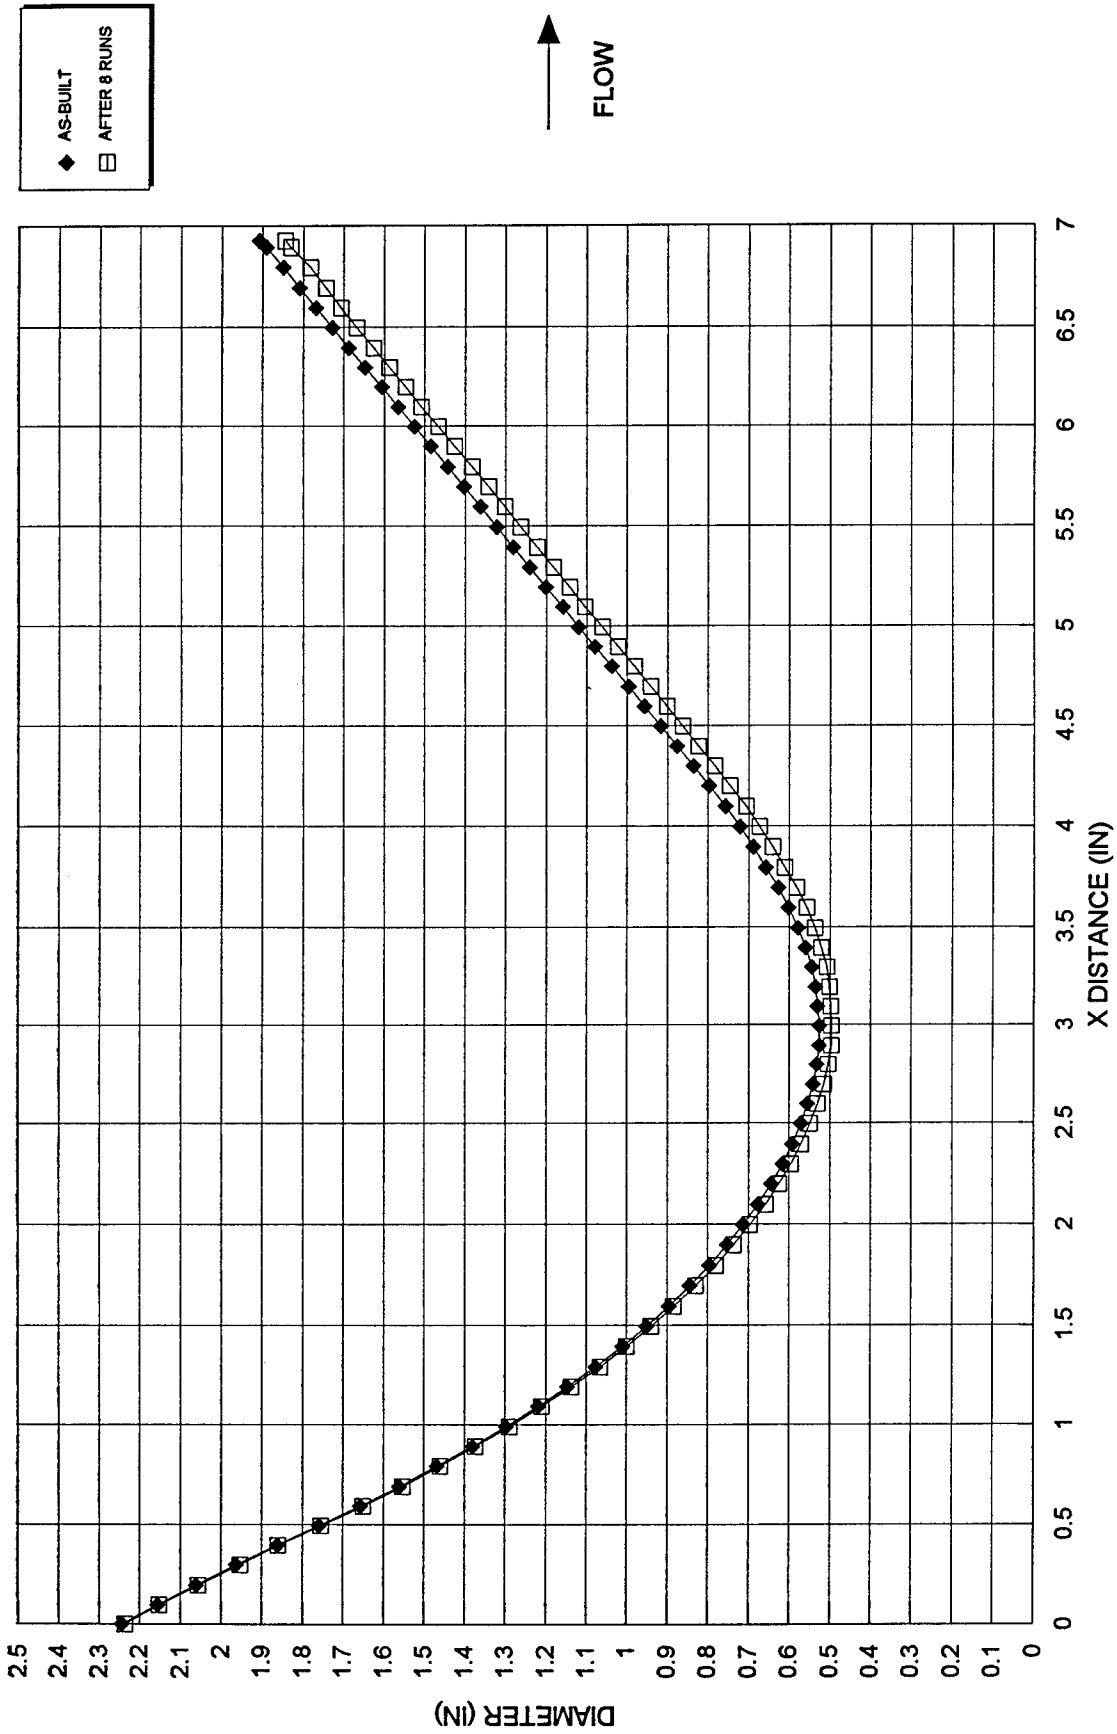


FIGURE 8. MACH 18 NOZZLE THROAT SECTION: AS BUILT AND AFTER 8 RUNS

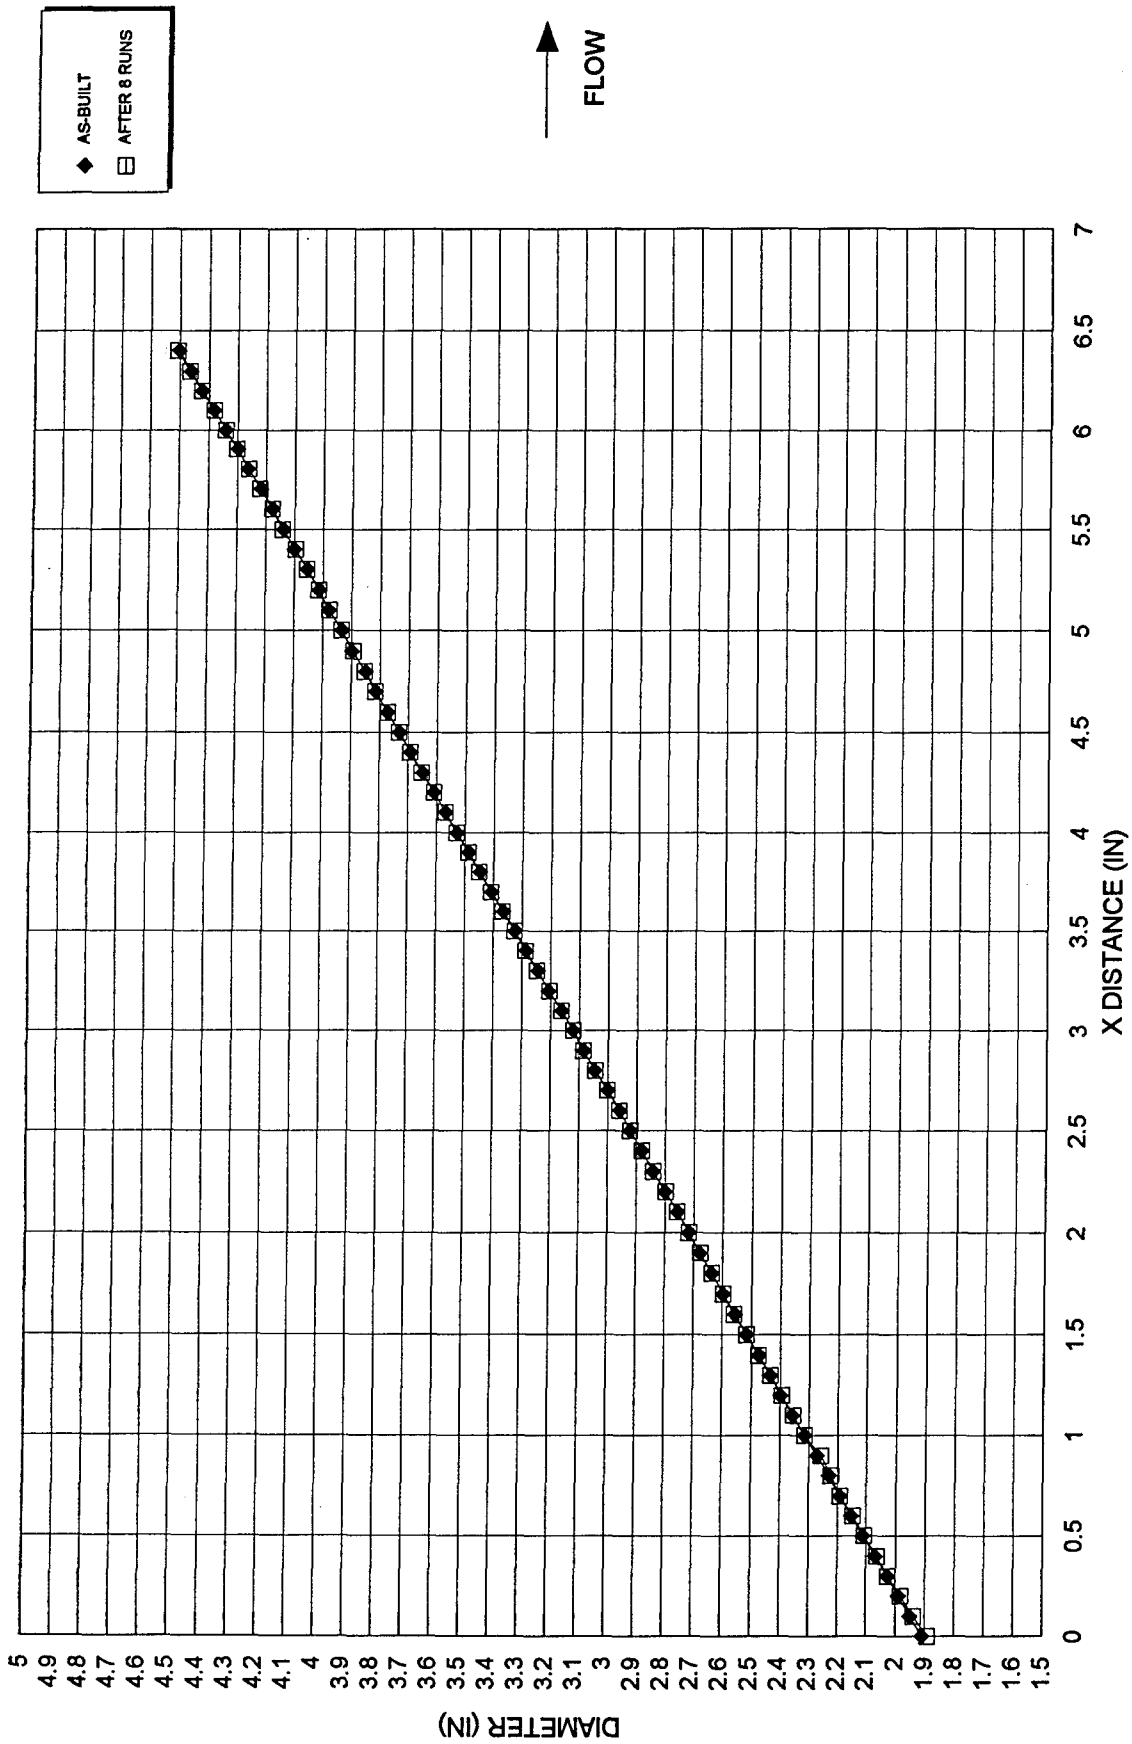


FIGURE 9. MACH 18 NOZZLE SCREWED INSERT SECTION: AS BUILT AND AFTER 8 RUNS

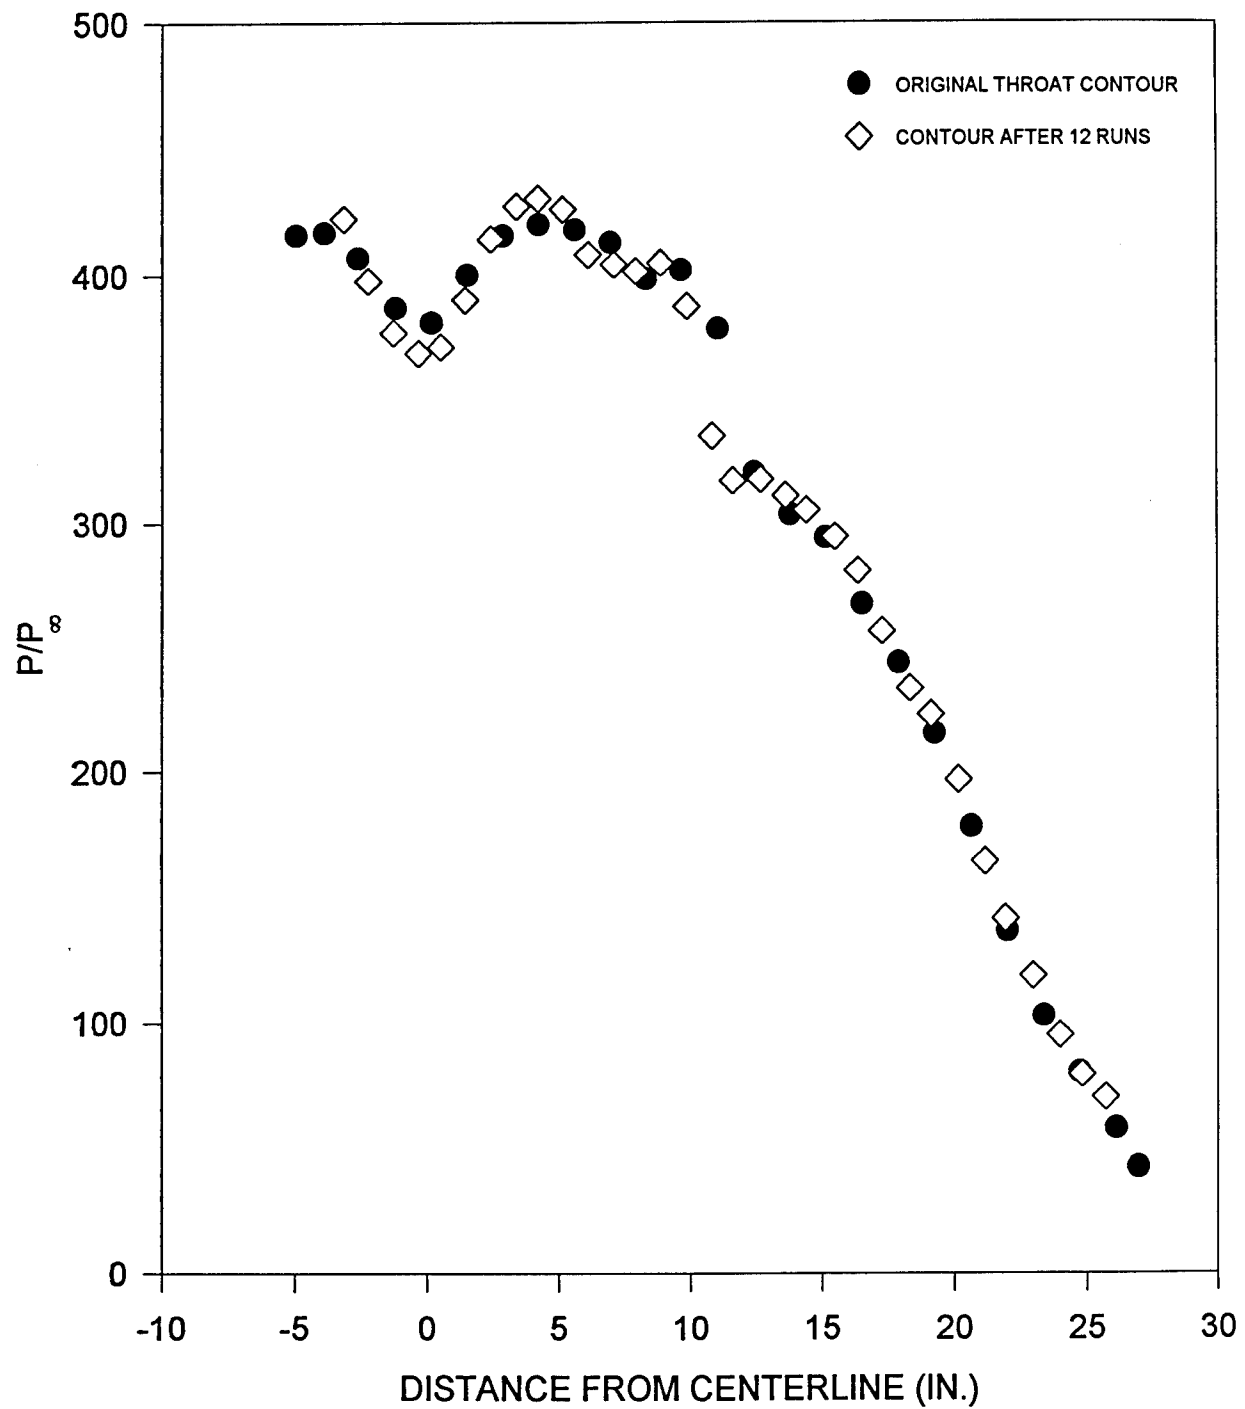


FIGURE 10. EFFECT OF THROAT CONTOUR CHANGE ON FLOW PROFILE



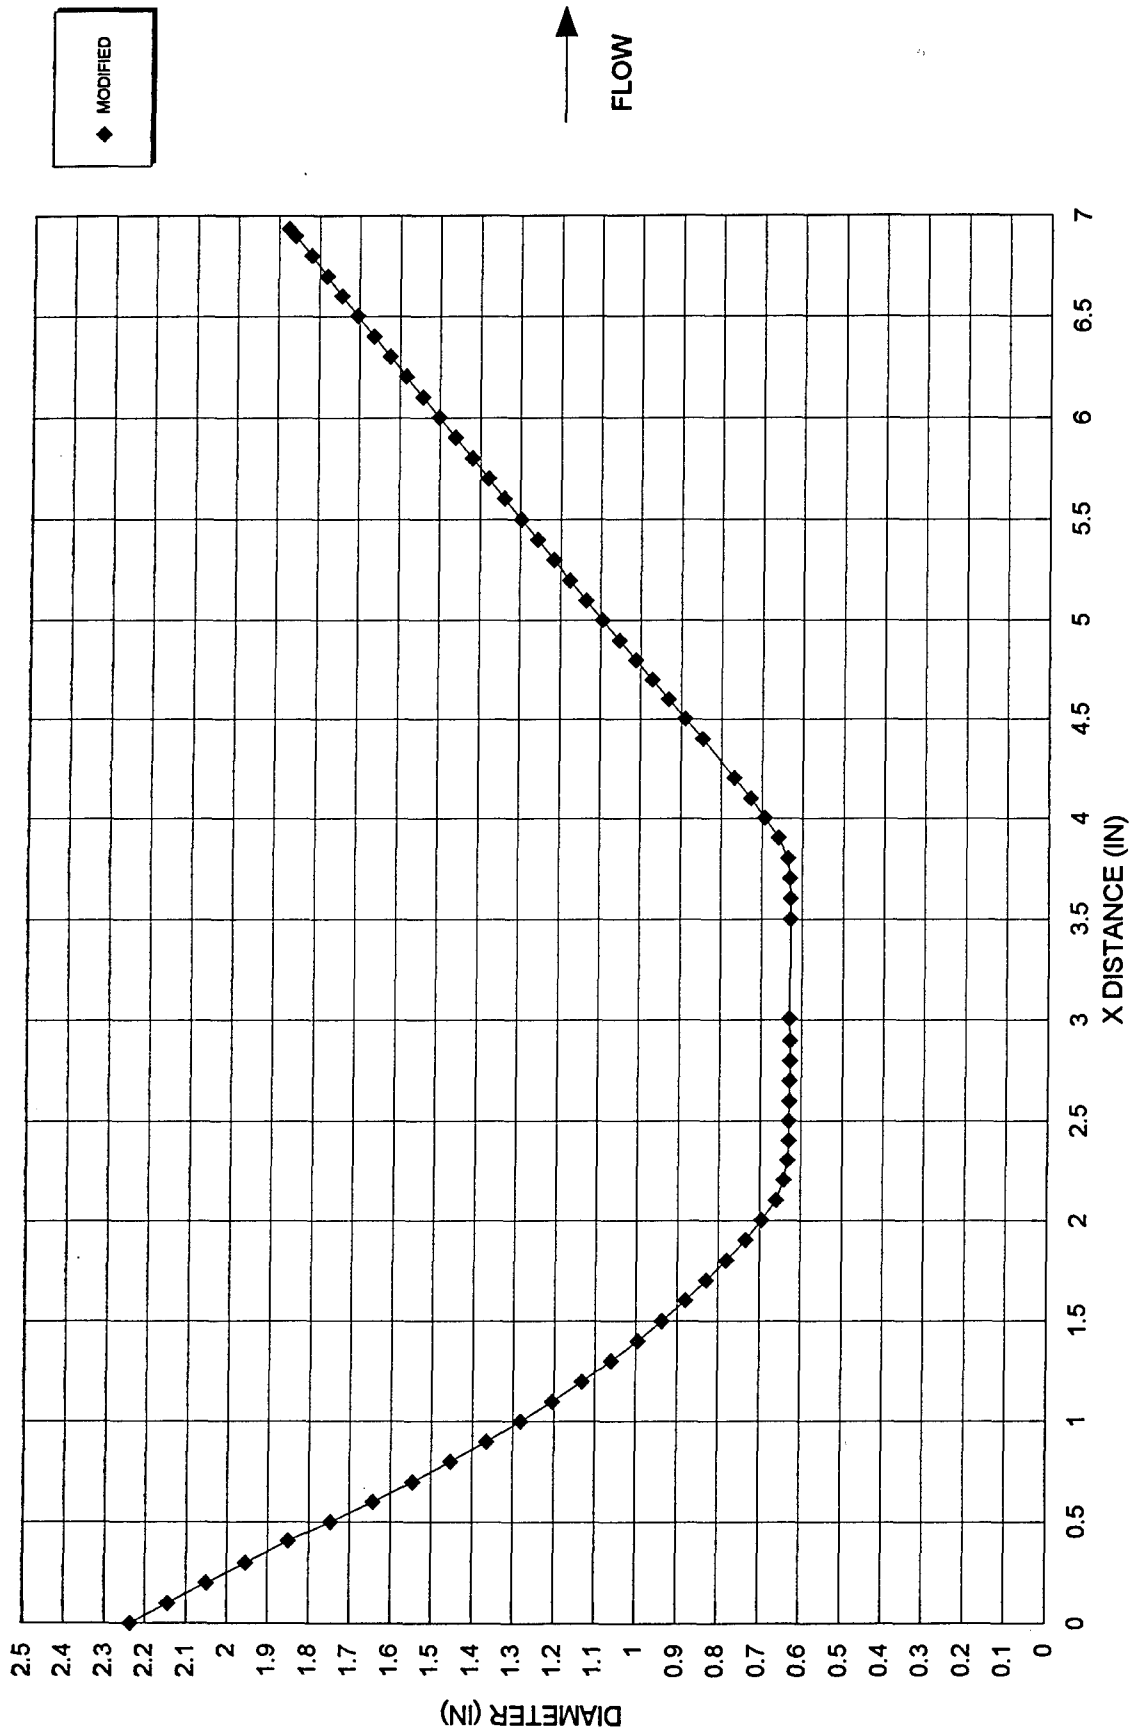


FIGURE 11. MACH 16.5 NOZZLE THROAT SECTION CONTOUR

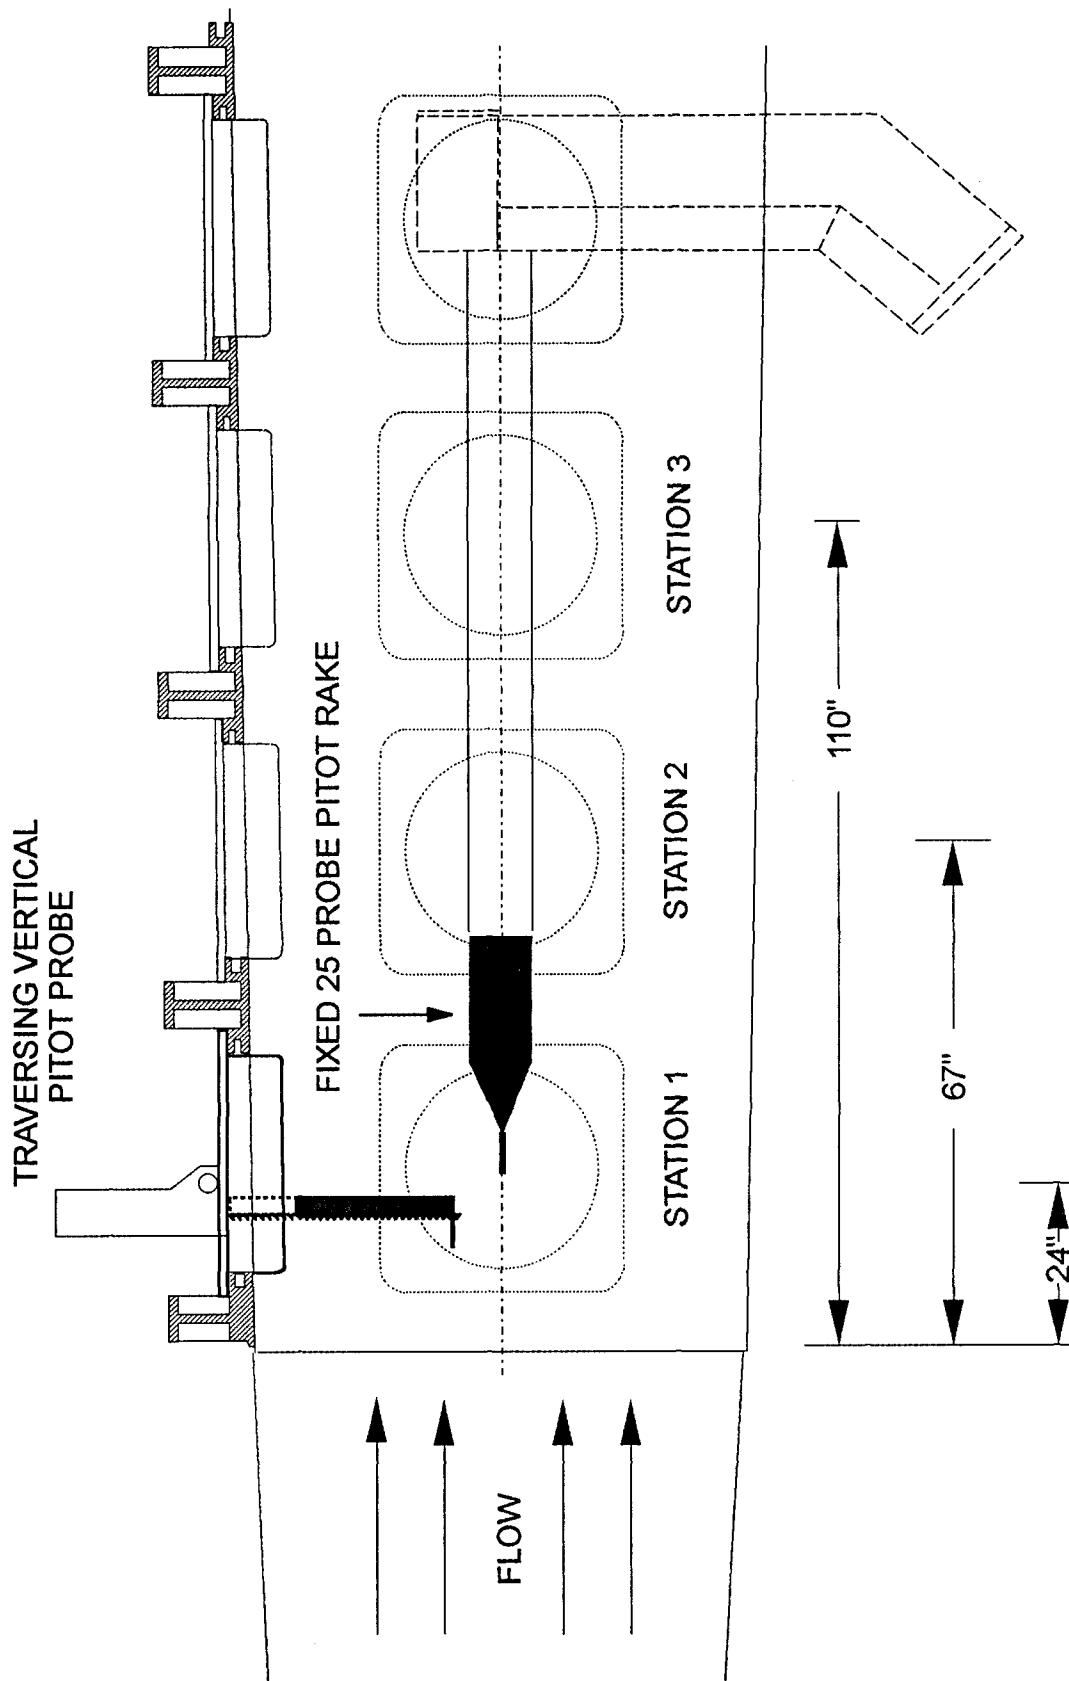


FIGURE 12. SCHEMATIC OF TEST SET-UP WITH FIXED AND TRAVERSING PITOT RAKES

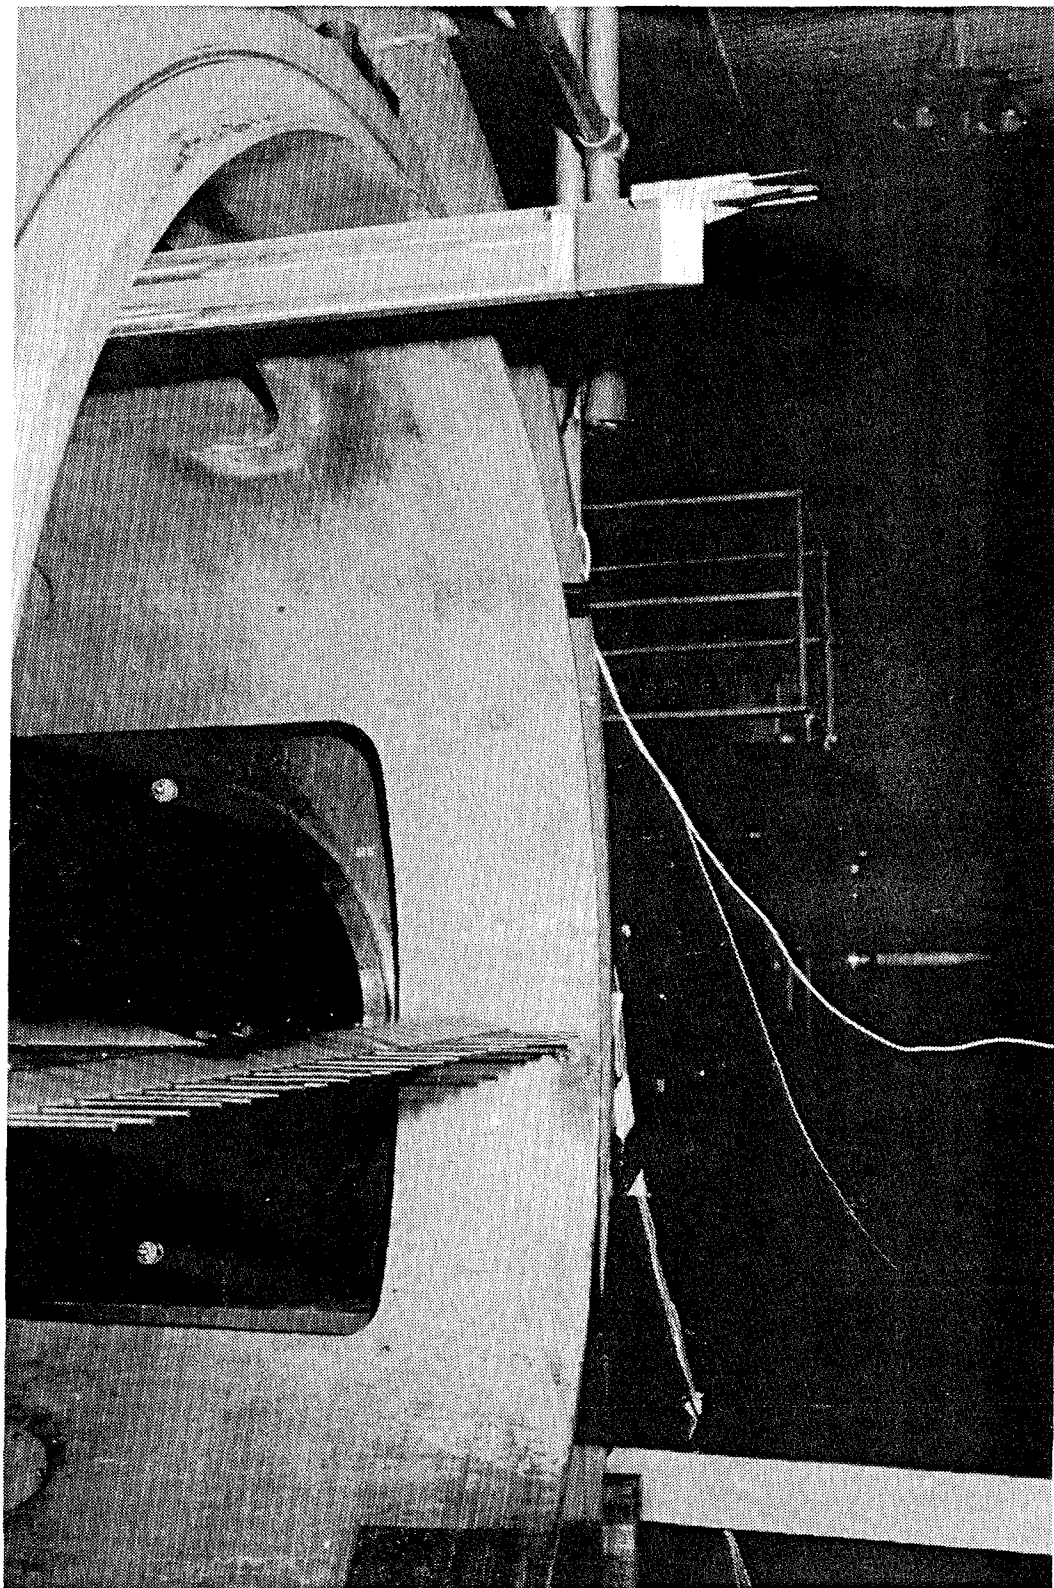


FIGURE 13. PHOTOGRAPH OF CALIBRATION AND TRAVERSING PITOT RAKES INSTALLED IN TUNNEL 9

## TEMPERATURE INSTRUMENTATION

GAUGE	AXIAL DISTANCE * (INCHES)	RAY
T15	18.30	3
T35	18.30	3
T17	24.62	1
T37	24.62	3
T18	29.76	1
T28	29.76	2
T38	29.76	3
T48	29.76	4
T110	34.98	1
T310	34.98	3
T112	40.00	1
T312	40.00	3
T114	45.50	1
T314	5.50	3
T116	50.28	1
T216	50.28	2
T316	50.28	3
T416	50.28	4
T118	6.43	1
T318	56.43	3

## PRESSURE INSTRUMENTATION

GAUGE	AXIAL DISTANCE * (INCHES)	RAY
P10	0.50	1
P30	0.50	3
P16	20.18	1
P26	20.18	2
P36	20.18	3
P46	20.18	4
P19	30.61	1
P39	30.61	3
P111	35.90	1
P311	35.90	3
P113	43.00	1
P213	43.00	2
P313	43.00	3
P413	43.00	4
P115	47.89	1
P315	47.89	3
P117	53.35	1
P217	53.35	2
P317	53.35	3
P417	53.35	4
PB1	59.50	1
PB2	59.50	2
PB3	59.50	3
PB4	59.50	4

\* AXIAL DISTANCES MEASURED FROM VIRTUAL SHARP  
NOSE 11.572 INCHES UPSTREAM OF BLUNT NOSE

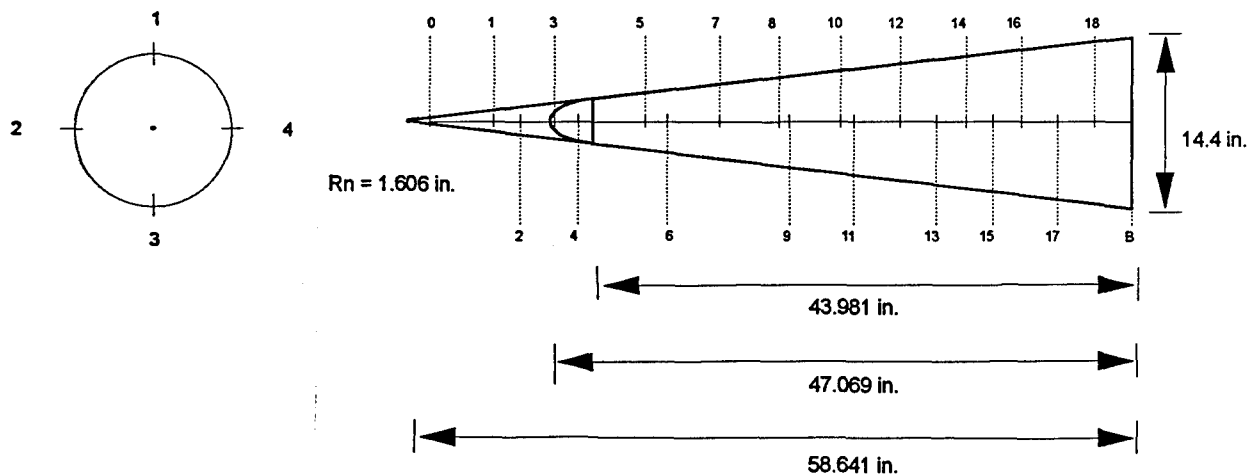


FIGURE 14. BLUNT CONE INSTRUMENTATION

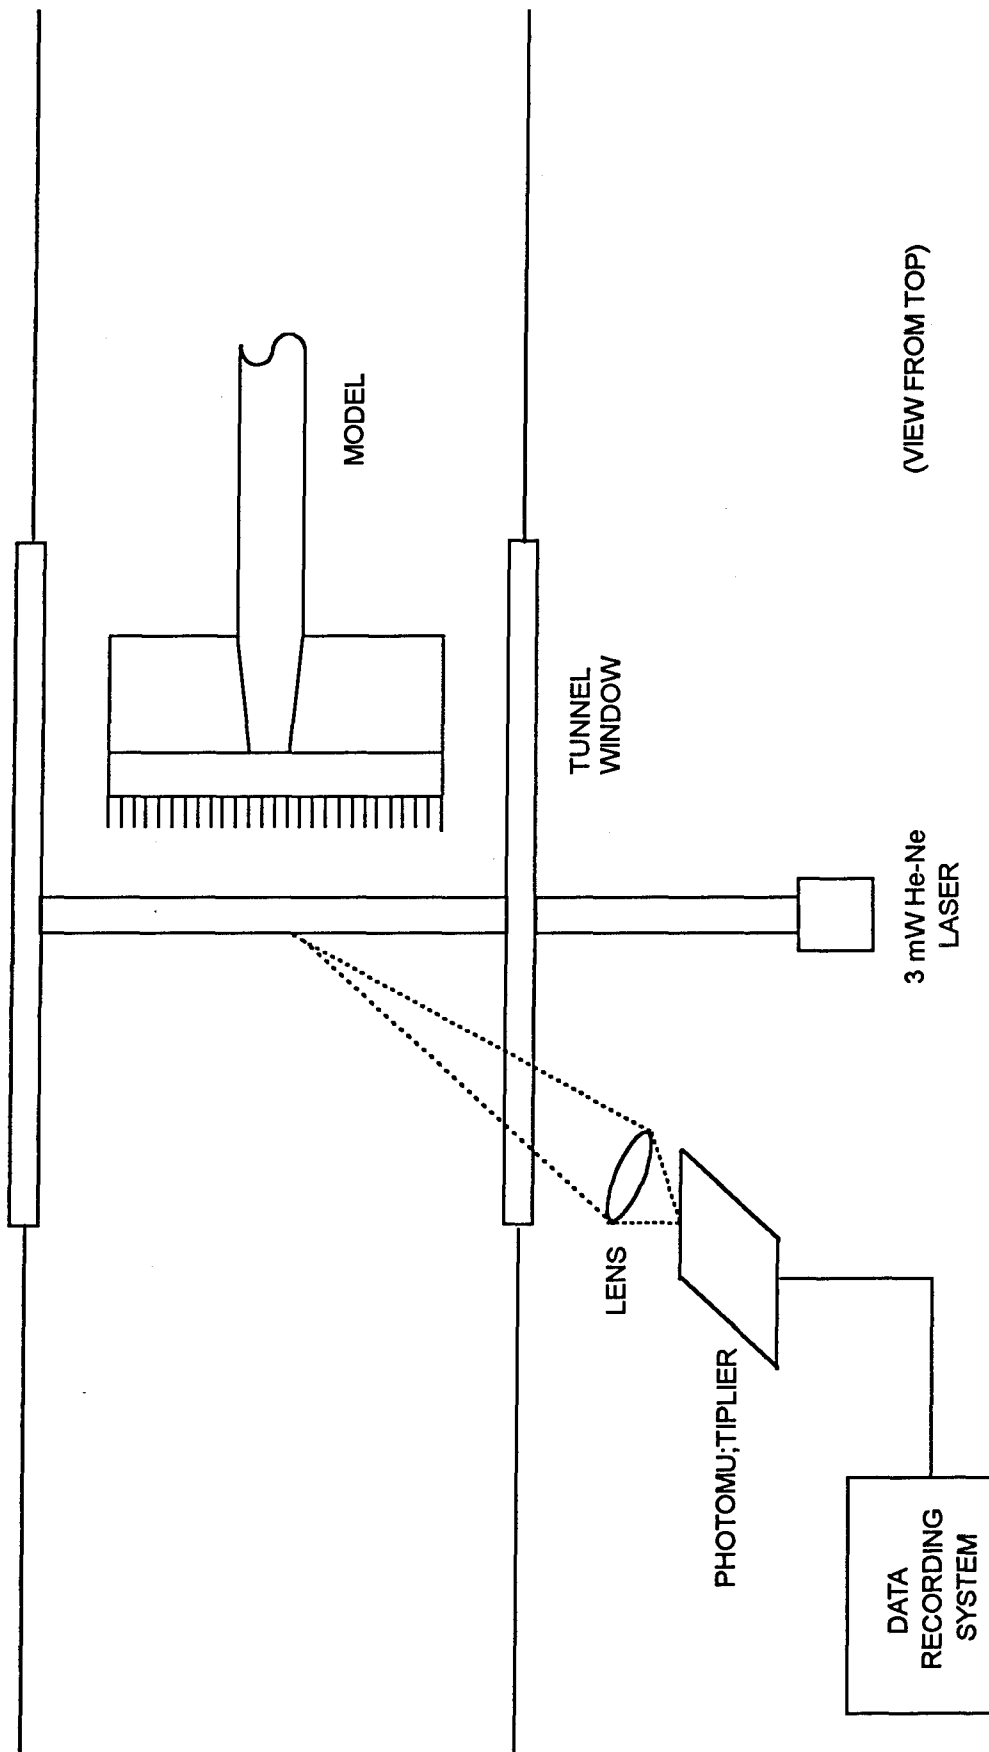


FIGURE 15. LASER LIGHT SCATTERING OPTICS

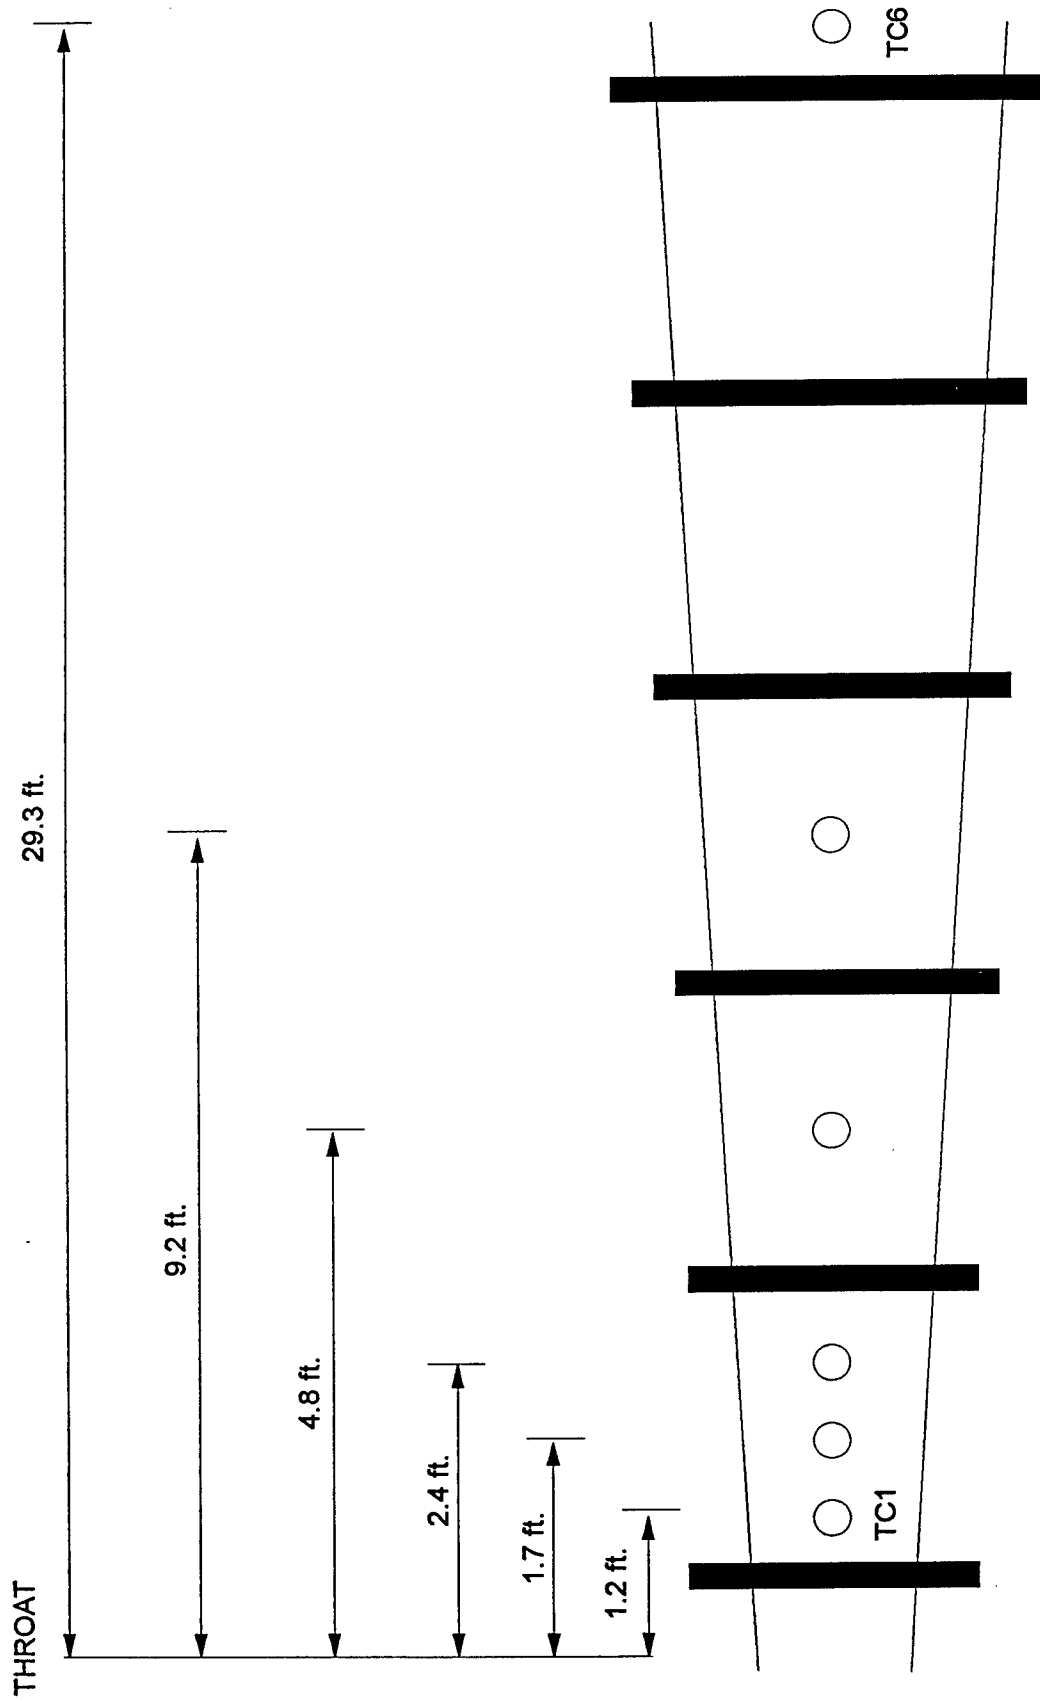


FIGURE 16. LOCATION OF NOZZLE WALL THERMOCOUPLES

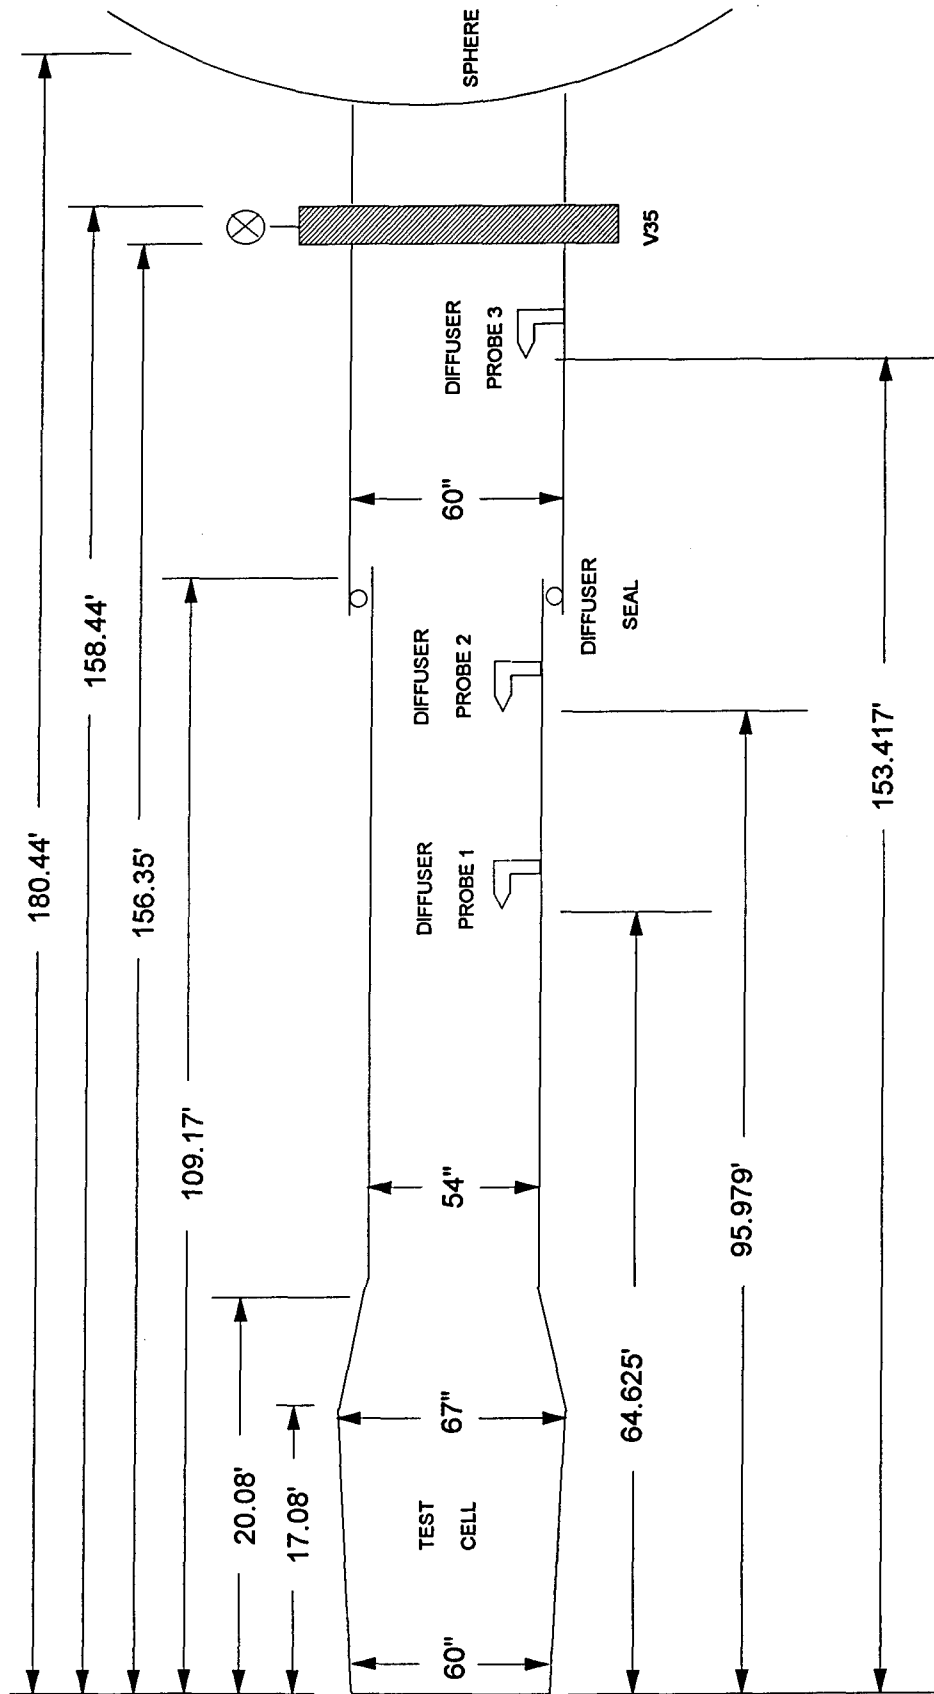


FIGURE 17. LOCATION OF DIFFUSER CONE STATIC PROBES

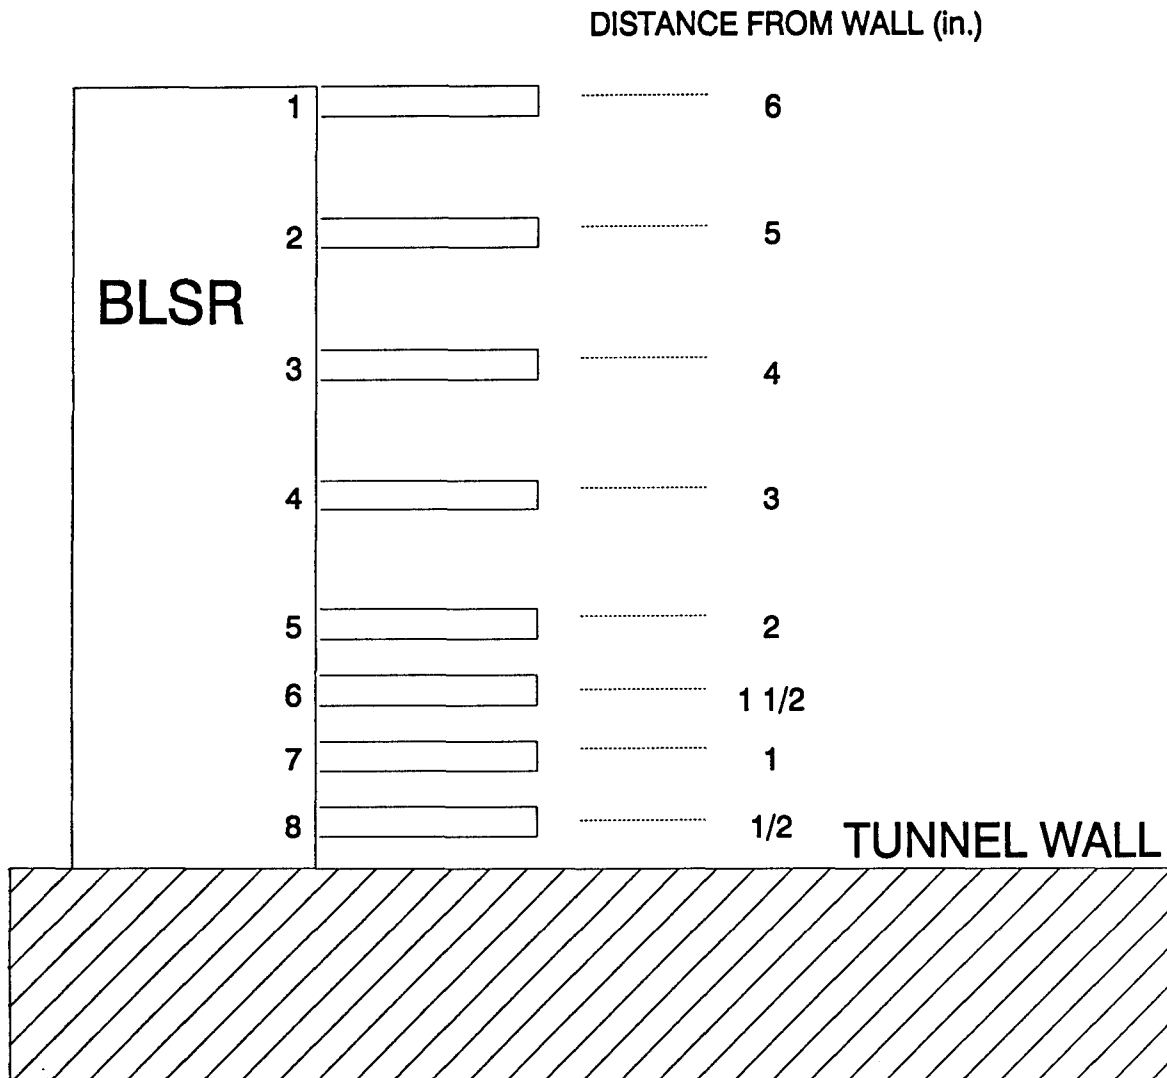


FIGURE 18. SHORT BOUNDARY-LAYER PITOT RAKE



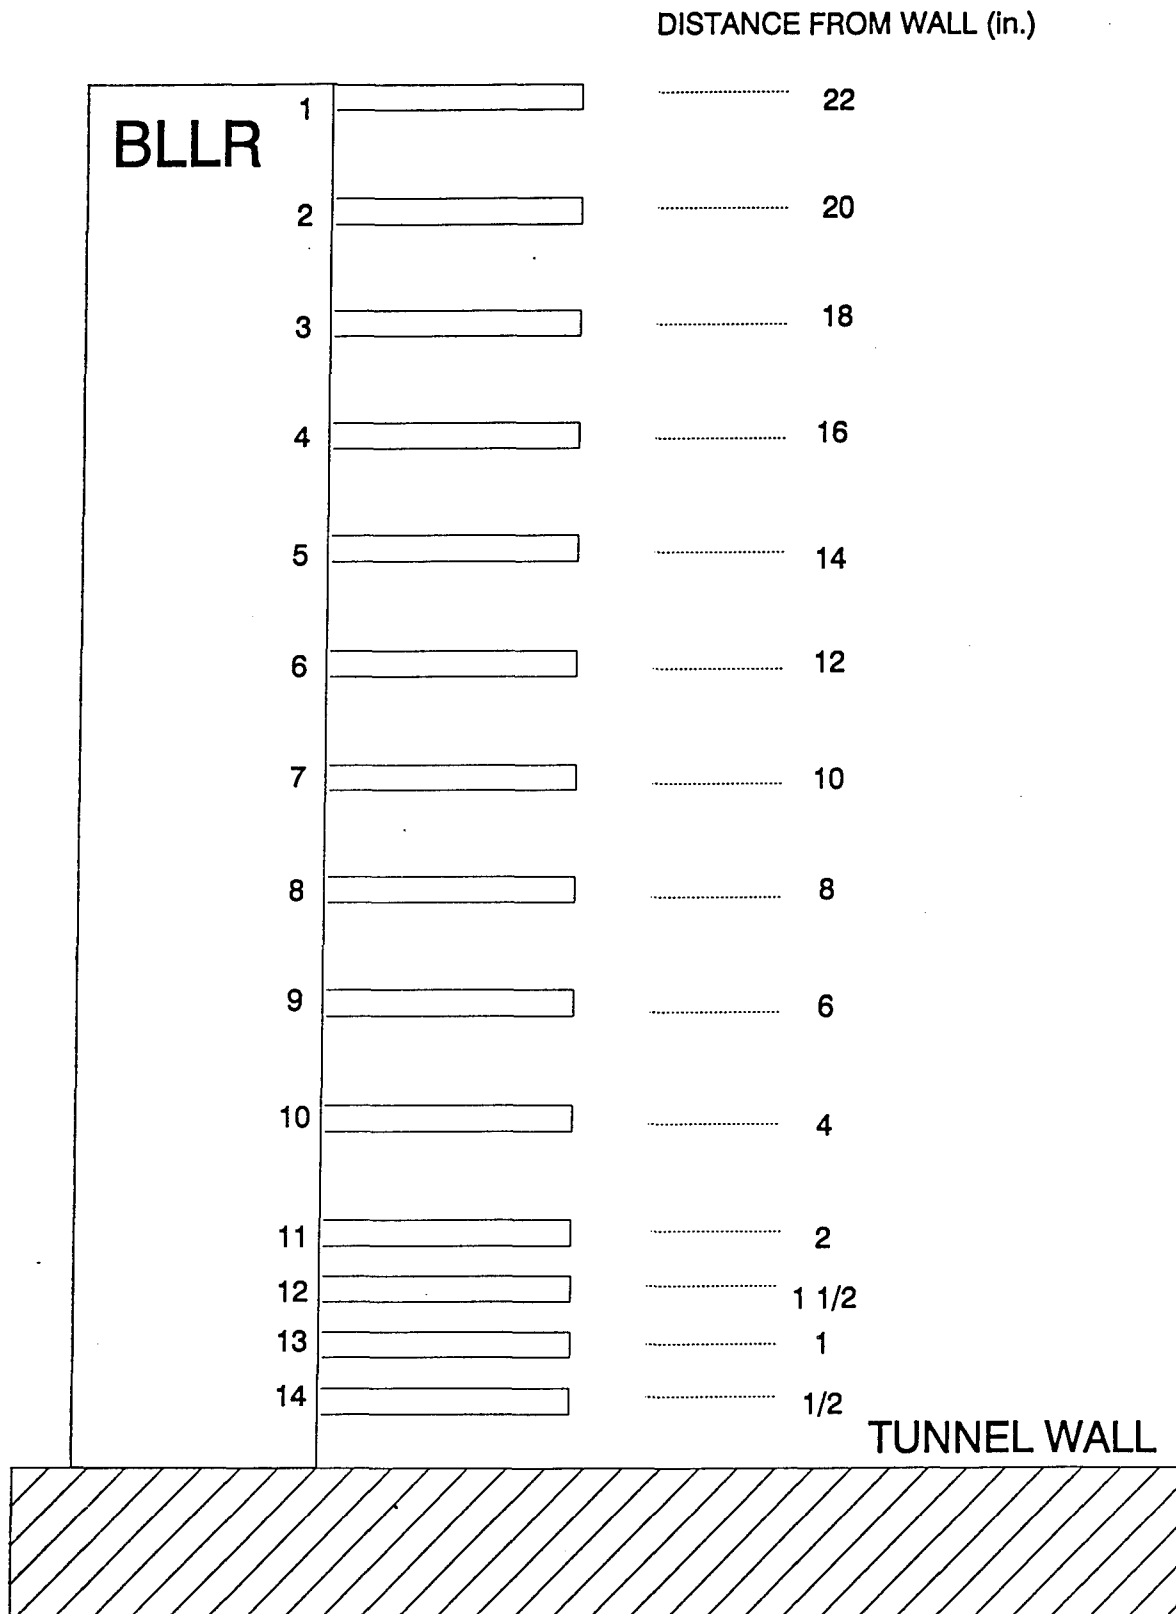


FIGURE 19. LONG BOUNDARY-LAYER PITOT RAKE

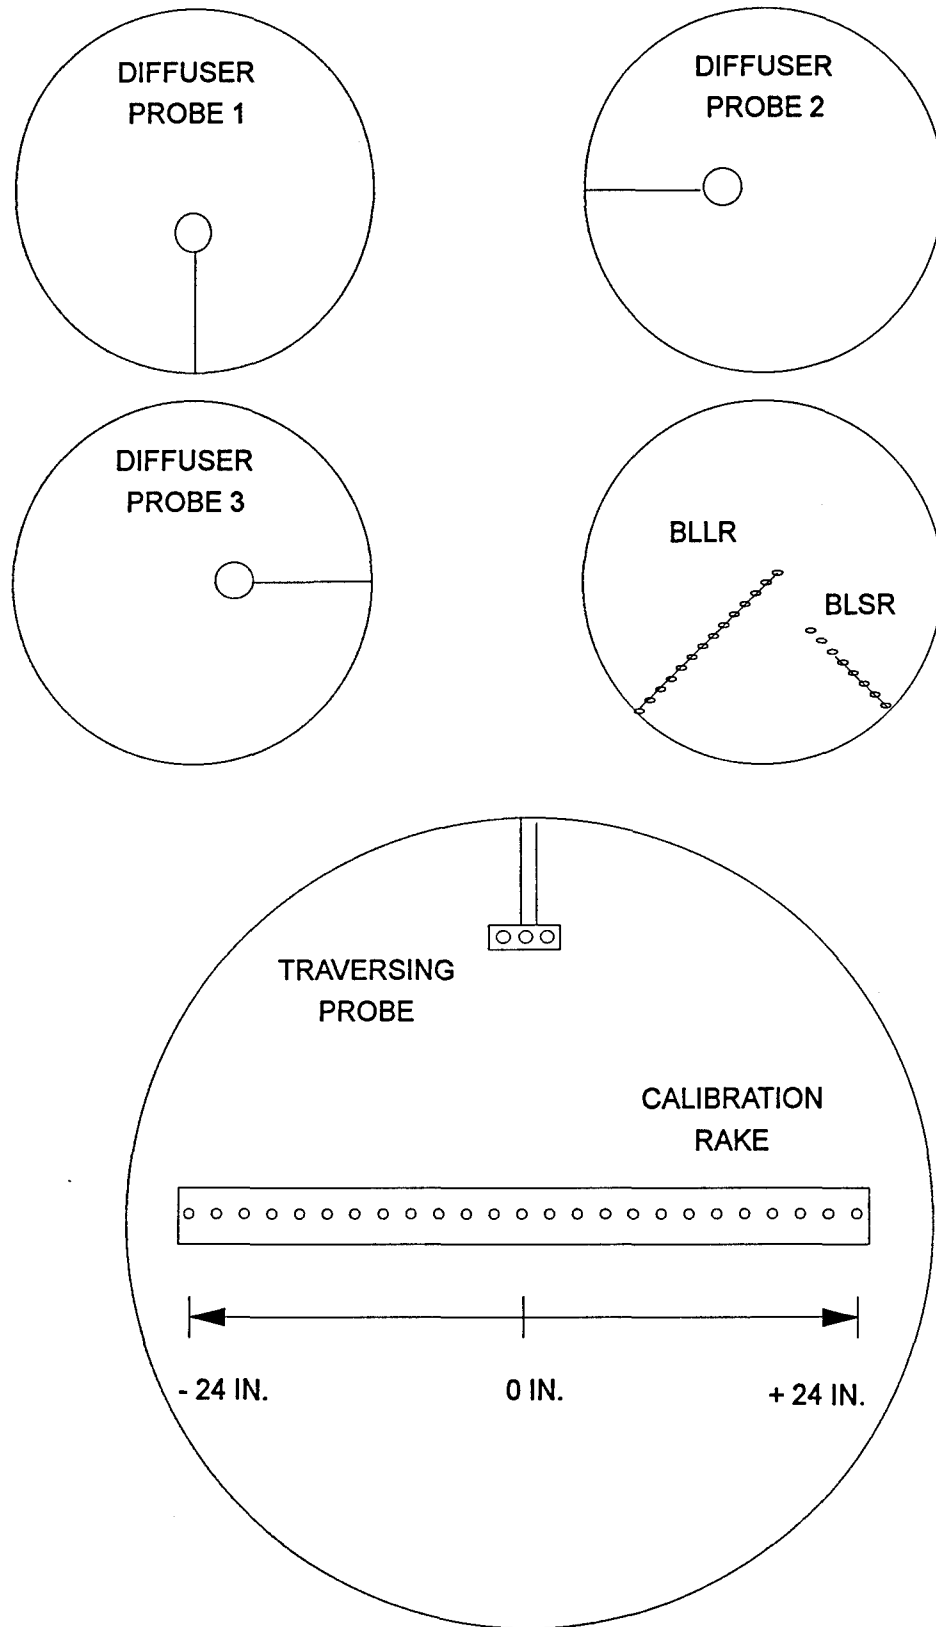


FIGURE 20. ORIENTATION OF CALIBRATION RAKE AND STRUT MOUNTED INSTRUMENTATION

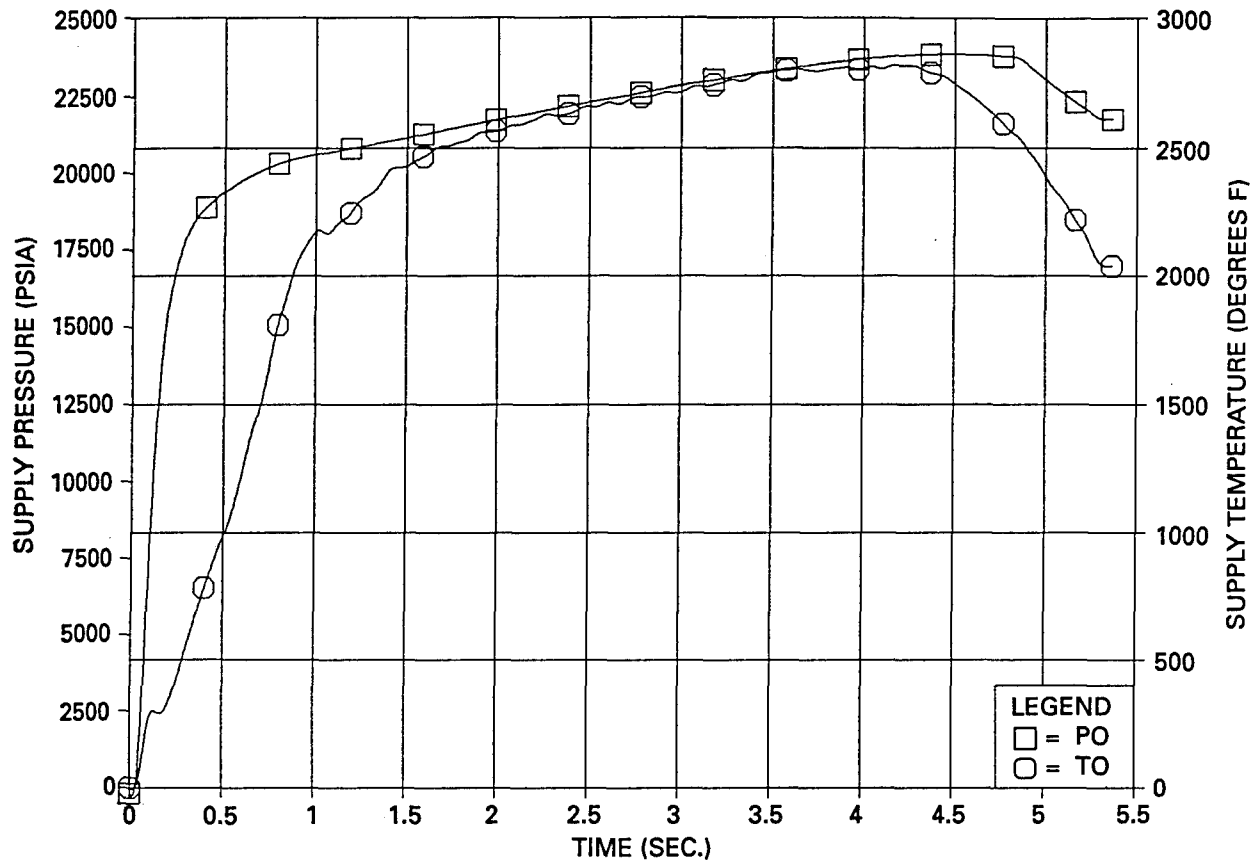


FIGURE 21. TYPICAL SUPPLY CONDITIONS FOR TUNNEL 9 HIGH MACH NUMBER OPERATION

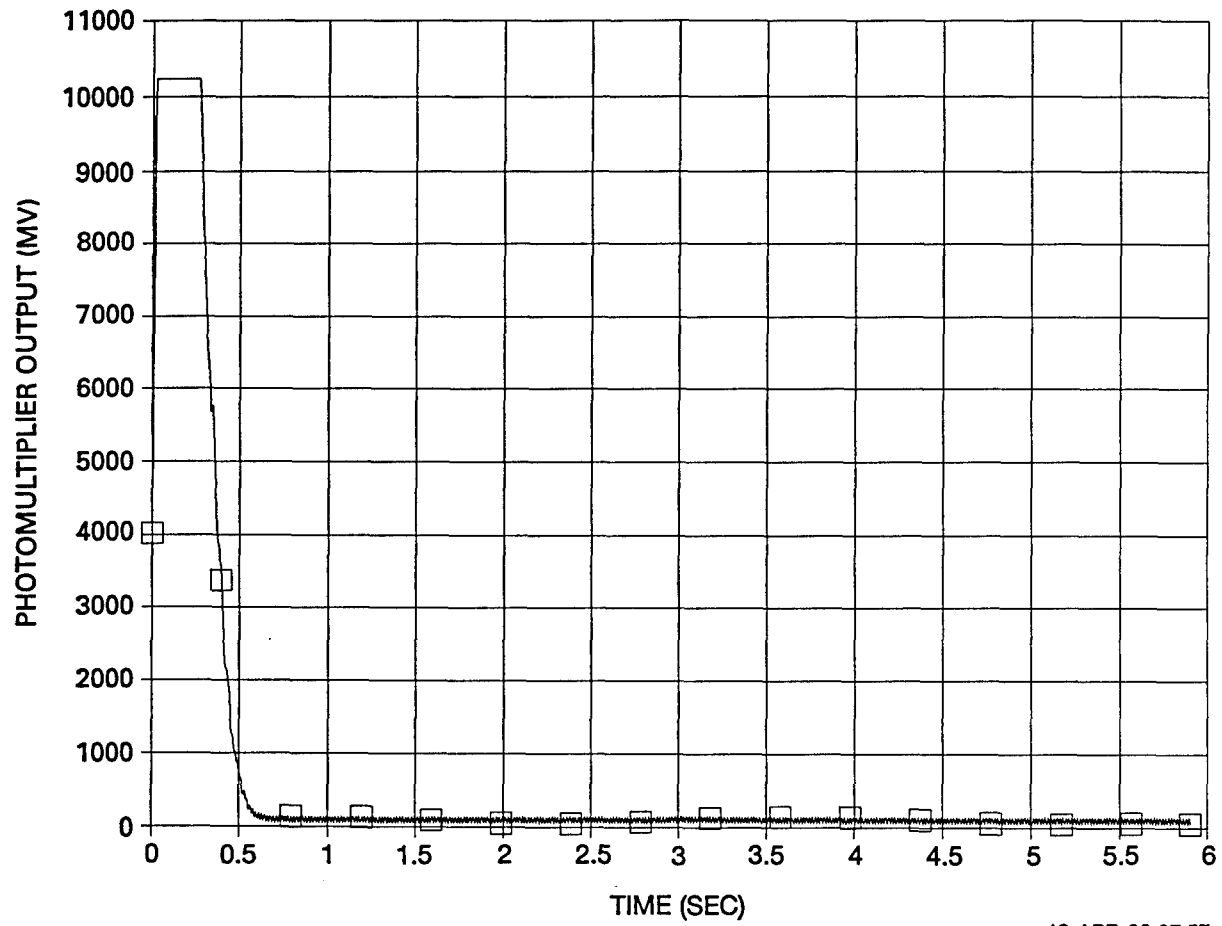


FIGURE 22. PHOTOMULTIPLIER SIGNAL VS. TIME

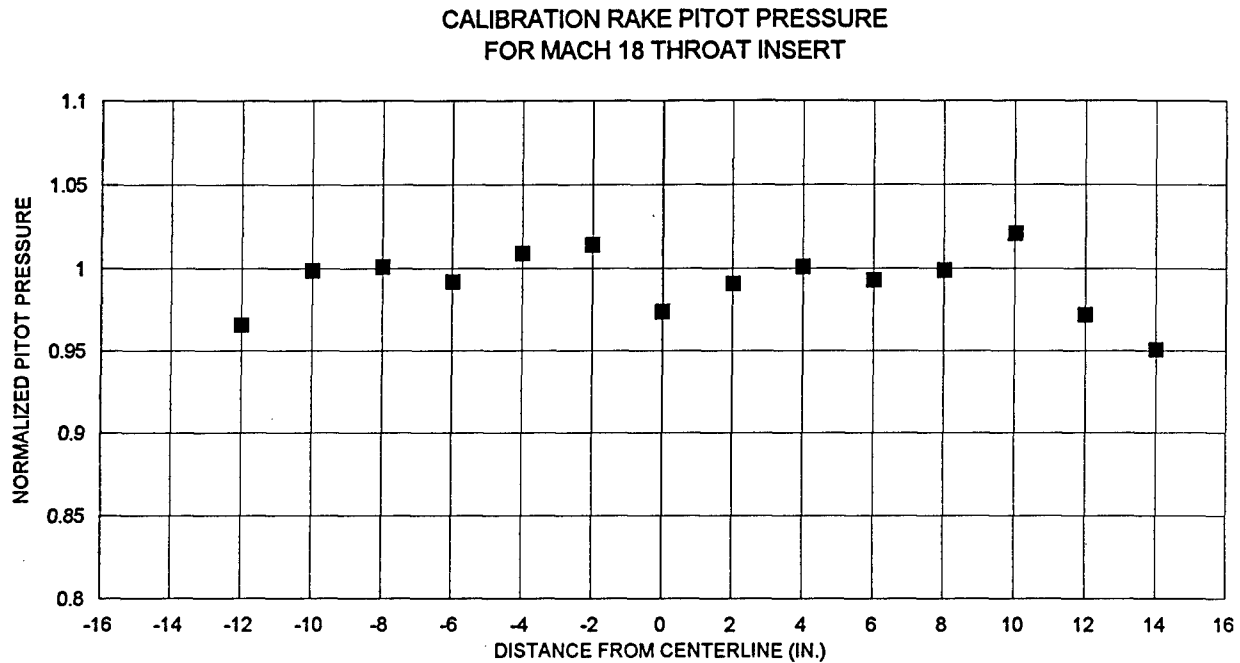


FIGURE 23. NORMALIZED PITOT PRESSURE VS. DISTANCE FROM CENTERLINE  
FOR RUN 2274

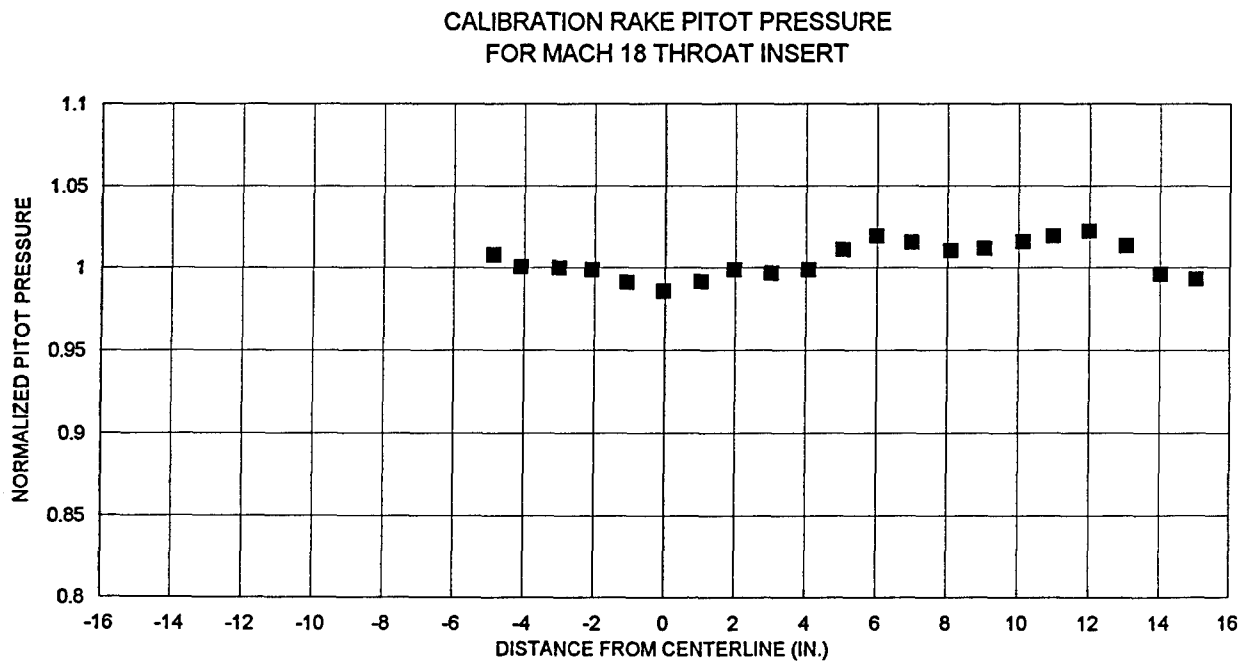


FIGURE 24. NORMALIZED PITOT PRESSURE VS. DISTANCE FROM CENTERLINE  
FOR RUN 2338

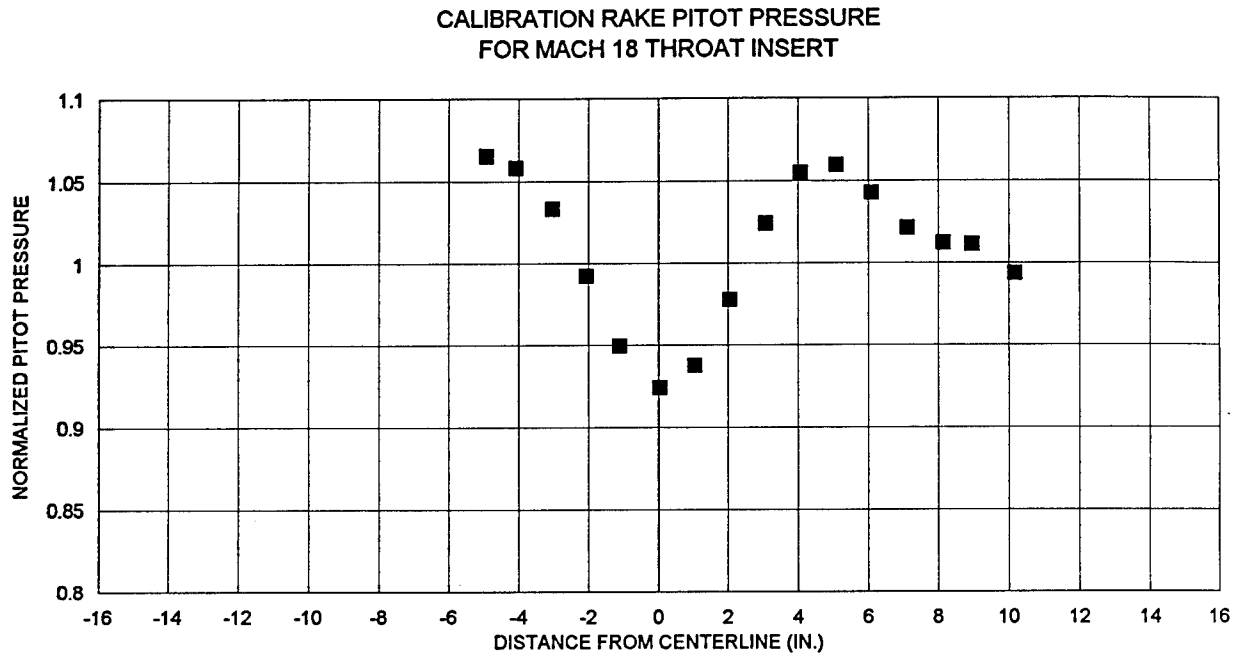


FIGURE 25. NORMALIZED PITOT PRESSURE VS. DISTANCE FROM CENTERLINE  
FOR RUN 2341

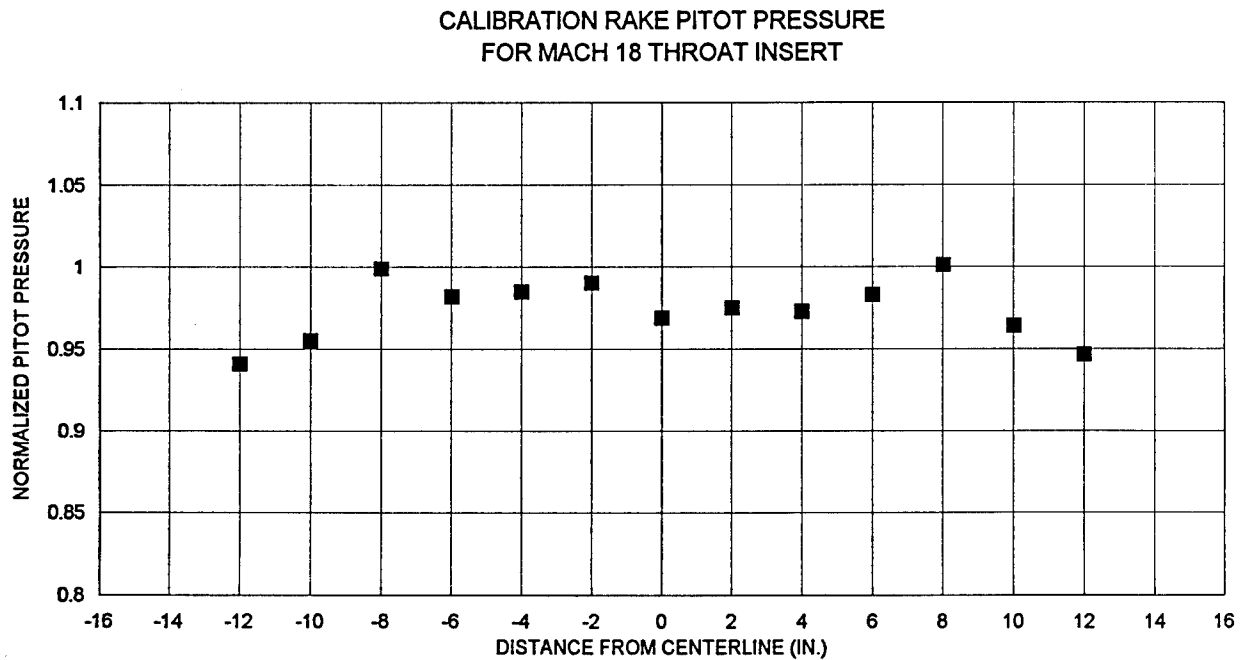


FIGURE 26. NORMALIZED PITOT PRESSURE VS. DISTANCE FROM CENTERLINE  
FOR RUN 2343

CALIBRATION RAKE PITOT PRESSURE  
FOR MACH 16.5 THROAT INSERT

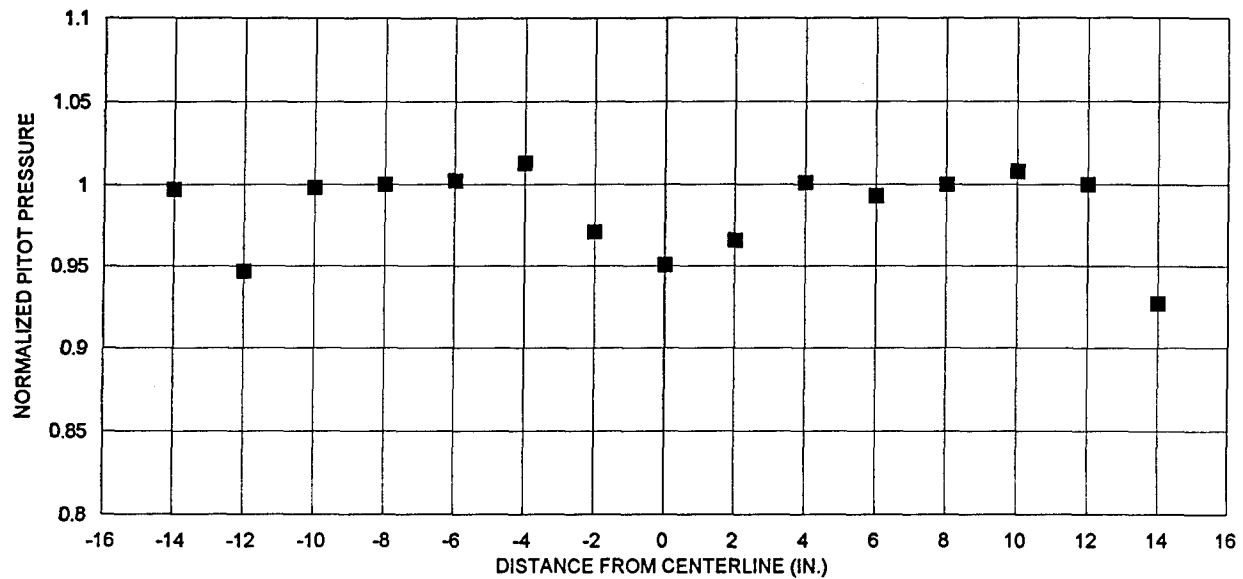


FIGURE 27. NORMALIZED PITOT PRESSURE VS. DISTANCE FROM CENTERLINE  
FOR RUN 2374

CALIBRATION RAKE PITOT PRESSURE  
FOR MACH 16.5 THROAT INSERT

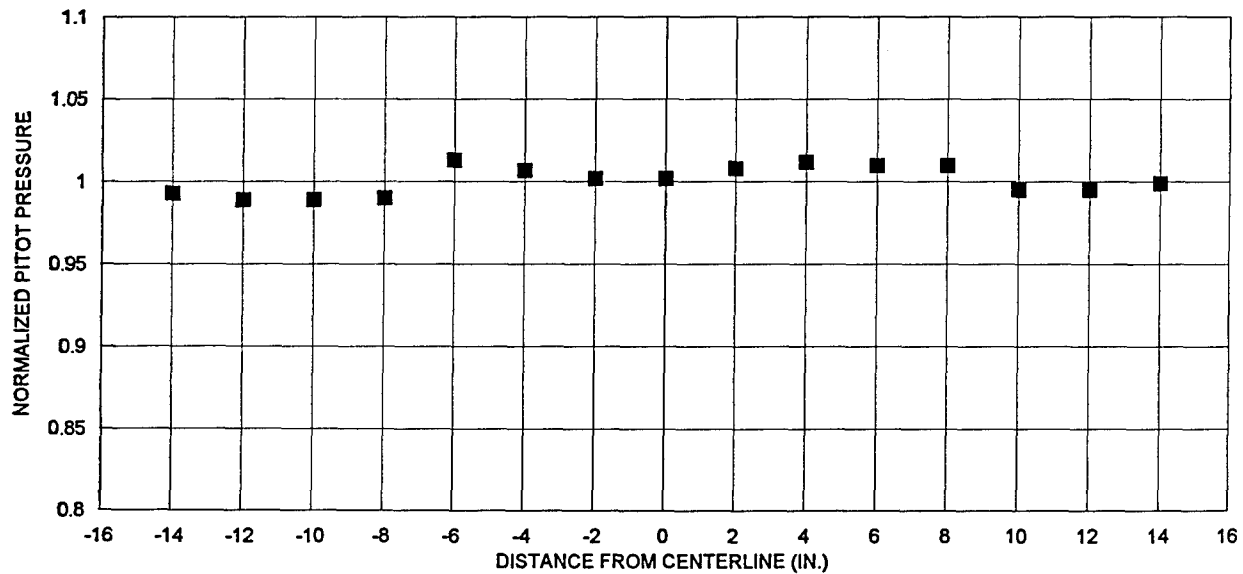


FIGURE 28. NORMALIZED PITOT PRESSURE VS. DISTANCE FROM CENTERLINE  
FOR RUN 2377

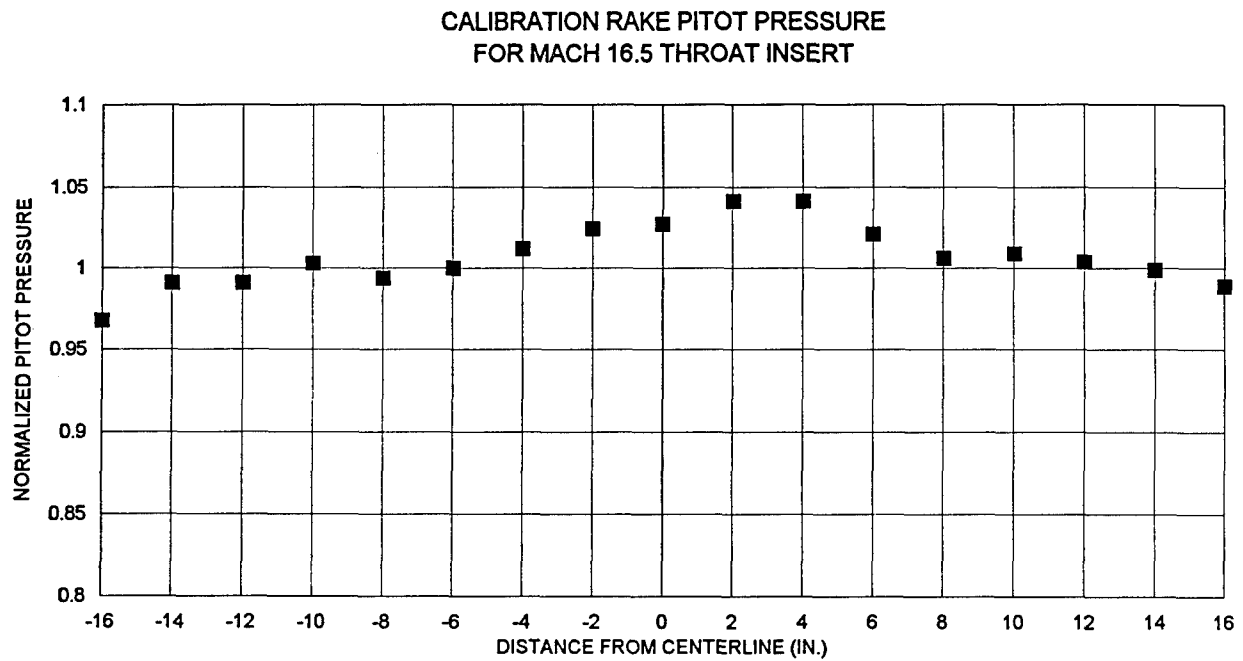


FIGURE 29. NORMALIZED PITOT PRESSURE VS. DISTANCE FROM CENTERLINE  
FOR RUN 2379



TABLE 1. HARDWARE SET THROAT DIAMETERS

HARDWARE SET	AS-BUILT MINIMUM THROAT DIAMETER (INCHES)
1	0.5262
2	0.5260
3	0.5275
3 (Modified)	0.6284
4	0.5273
5	0.5267
6	0.5521

TABLE 2. ESTIMATED UNCERTAINTIES

## A. TUNNEL INSTRUMENTATION

Quantity	Type	Range	Nominal Value	B	P	U	$\frac{U}{\text{Nominal}}$
P <sub>o</sub> (psia)	Viatran 214	50000	21060	73.453	10.422	± 74.188	± 0.35%
T <sub>o</sub> (° F)	W5RE vs W26RE	4200	2765	14.806	0.749	± 14.825	± 0.54%
Pt (psia)	Kulite XCW-093	15	6.59	0.012	0.006	± 0.013	± 0.20%
Thetas (degrees)	Houston Sci (1150)	NA	NA	0.017	0.034	± 0.038	NA

## B. MODEL INSTRUMENTATION

Quantity	Type	Range	Nominal Value	B	P	U	$\frac{U}{\text{Nominal}}$
9HV6-5 Force Balance							
FN (lb)		2000	317.2	7.923	0.626	± 7.948	± 2.5%
FY (lb)		1000	4.535	4.463	0.156	± 4.466	*
FA (lb)		600	93.4	0.059	0.102	± 0.118	± 0.13%
MX (in-lb)		800	0.623	0.26	0.154	± 0.302	*
MY (in-lb)		NA	139.3	12.802	1.518	± 12.892	± 9.25%
MZ (in-lb)		NA	-17.6	14.092	0.528	± 14.102	*
Pressures							
Rake Pitot Pressure (psia)	Kulite XCW-093	15	6.581	0.029	0.006	± 0.030	± 0.46%
Model Static Pressure (psia)	PTQH	5	3.655	0.01	0.008	± 0.013	± 0.36%
Base Pressure (psia)	PTQH	5	0.008	0.014	0.007	± 0.015	± 187%**
Temperature							
Surface Temp. Rise (°F)	Medtherm	NA	NA	1	1.303	± 1.642	NA
YTRAV (in)	NA	NA	NA	0.006	0.001	± 0.006	NA

\* Due to model symmetry, the nominal values of these quantities are approximately zero.

\*\* The 10 mmHg Baratron did not operate during the calibration phase of this run. The 1000 mmHg Baratron had to be used for calibration of base pressure gages.

TABLE 2. ESTIMATED UNCERTAINTIES (CONTINUED)

## C. CALCULATED PARAMETERS

Parameter Units	Nominal Value	B	P	U	$\frac{U}{\text{Nominal}}$
Mach	16.35	0.019	3.723e-03	$\pm 0.019$	$\pm 0.12\%$
$P_{\infty}$ (psia)	0.019	6.439e-05	2.506e-05	$\pm 6.910e-05$	$\pm 0.36\%$
$Q_{\infty}$ (psia)	3.578	6.513e-03	3.256e-03	$\pm 7.281e-03$	$\pm 0.20\%$
$T_{\infty}$ (°F)	69.98	0.437	0.037	$\pm 0.439$	$\pm 0.63\%$
$Re_{\infty}$ (1/ft)	2.643e+06	2.232e+04	1.902e+03	$\pm 2.240e+04$	$\pm 0.85\%$
$Rho_{\infty}$ (lbm/ft <sup>3</sup> )	7.122e-04	3.640e-06	6.758e-07	$\pm 3.702e-06$	$\pm 0.52\%$
$U_{\infty}$ (ft)	6820	16.28	0.834	$\pm 16.31$	$\pm 0.24\%$
VIP (ft <sup>1/2</sup> )	0.010	3.660e-05	4.998e-06	$\pm 3.694e-05$	$\pm 0.37\%$
For Calibration Rake					
CP	1.834	8.016e-03	2.367e-03	$\pm 8.358e-03$	$\pm 0.46\%$
P/P01	2.885e-04	1.992e-06	3.209e-07	$\pm 2.018e-06$	$\pm 0.70\%$
P/P $\infty$	344.3	1.737	0.548	$\pm 1.822$	$\pm 0.53\%$
P/Pt	0.999	4.352e-03	1.285e-03	$\pm 4.538e-03$	$\pm 0.45\%$
For Cone Model					
CP	0.139	2.623e-03	2.240e-03	$\pm 3.449e-03$	$\pm 2.48\%$
P/P01	2.258e-05	4.545e-07	3.510e-07	$\pm 5.743e-07$	$\pm 2.54\%$
P/P $\infty$	26.94	0.483	0.42	$\pm 0.640$	$\pm 2.38\%$
P/Pt	0.078	1.426e-03	1.216e-03	$\pm 1.874e-03$	$\pm 2.4\%$
ST	0.015	NA	6.700e-04	$\pm 6.700e-04$	$\pm 4.5\%$
ALPHA (deg)	16.36	0.086	0.045	$\pm 0.097$	$\pm 0.59\%$
AFC	0.166	4.661e-04	3.330e-04	$\pm 5.728e-04$	$\pm 0.35\%$
CAFC	0.163	4.076e-03	2.052e-03	$\pm 4.563e-03$	$\pm 2.80\%$

TABLE 2. ESTIMATED UNCERTAINTIES (CONTINUED)

## C. CALCULATED PARAMETERS (CONTINUED)

Parameter Units	Nominal Value	B	P	U	$\frac{U}{\text{Nominal}}$
CPB	-2.926e-03	4.048e-03	2.024e-03	$\pm 4.526\text{e-}03$	$\pm 155\%^{**}$
NFC	0.563	0.014	1.233e-03	$\pm 0.014$	$\pm 2.49\%$
PMC	-0.022	7.684e-04	7.231e-05	$\pm 7.718\text{e-}04$	$\pm 3.50\%$
RMC	1.887e-05	4.871e-05	4.829e-06	$\pm 4.895\text{e-}05$	*
YFC	8.051e-03	7.928e-03	3.647e-04	$\pm 7.937\text{e-}03$	*
YMC	-8.947e-04	5.644e-04	2.258e-05	$\pm 5.649\text{e-}04$	*
XCPP	0.706***	7.340e-04	8.299e-05	$\pm 7.387\text{e-}04$	$\pm 0.10\%$
XCPY	0.778***	0.082	3.639e-03	$\pm 0.082$	$\pm 10.54\%$

\* Due to model symmetry, the nominal values of these quantities are approximately zero.

\*\* The 10 mmHg Baratron did not operate during the calibration phase of this run. The 1000 mmHg Baratron had to be used for calibration of base pressure gages.

\*\*\* The F\_Jitter program currently does not contain an input to reference the moment- reference-center to the nose. To get XCP referenced to the nose, add the value of XCPTERM (found in the data printout) to the jitter output value for XCPP and XCPY.

TABLE 3. RUN MATRIX

Run #	Nominal Mach #	Hardware Set	Core	Reynolds No. (1/f)	Comments
2271	16.68	1	24 in.	$1.6 \times 10^6$	Calibration rake. Station 1. Po = 12000 psia.
2272	17.4	1	24 in.	$2.0 \times 10^6$	Calibration rake. Station 1. Po = 15000 psia.
2274	17.45	1	24 in.	$2.13 \times 10^6$	Calibration rake. Station 1. Po = 20000 psia. Throat damaged near end of run.
2275	17.3	1	-----	$2.4 \times 10^6$	Calibration rake. Station 1. Damaged Throat.
2276	17.4	1	-----	$2.0 \times 10^6$	Calibration rake (rotated 180°). Station 1. Damaged Throat.
2293	17.1	1	-----	$2.3 \times 10^6$	Calibration rake. Station 1. Reworked throat.
2294	17.2	1	-----	$2.3 \times 10^6$	Calibration rake (vertical orientation). Station 1. Reworked throat.
2295	17.3	1	-----	$2.5 \times 10^6$	Calibration rake. Station 2. Reworked throat.
2299	14	-----	-----	-----	Diagnostics.
2300	14	-----	-----	-----	Diagnostics.
2301	14	-----	-----	-----	Diagnostics.
2302	14	-----	-----	-----	Diagnostics.
2303	14	-----	-----	-----	Diagnostics.
2304	14	-----	-----	-----	Diagnostics.
2305	17.2	1	-----	-----	Diagnostics.
2306	17.2	1	-----	-----	Diagnostics.
2307	17.2	1	-----	-----	Diagnostics.
2308	17.2	1	-----	-----	Diagnostics.

Model Position (inches from nozzle exit):  
 Station 1 = 24, Station 2 = 67, Station 3 = 110

TABLE 3. RUN MATRIX (CONTINUED)

Run #	Nominal Mach #	Hardware Set	Core	Reynolds No. (1/ft)	Comments
2309	14	1	-----	-----	Diagnostics Verification Run.
2338	18.25	2	30 in.	$2.09 \times 10^6$	APL Inlet Model. 1st run after Mach 10.
2339	17.72	2	20 in.	$2.54 \times 10^6$	APL inlet Model.
2340	17.69	2	20 in.	$2.40 \times 10^6$	APL inlet Model.
2341	17.82	2	20 in.	$2.50 \times 10^6$	APL inlet Model.
2343	17.69	2	20 in.	$2.32 \times 10^6$	Calibration rake. Station 1.
2344	17.38	2	20 in.	$2.27 \times 10^6$	Calibration rake. Station 2.
2345	17.54	2	24 in.	$2.35 \times 10^6$	Calibration rake. Station 3. Flow not symmetric.
2346	17.56	2	16 in.	$2.23 \times 10^6$	Calibration rake. Nozzle exit.
2347	17.39	3	20 in.	$2.55 \times 10^6$	Calibration rake. Station 1.
2348	17.61	2	20 in.	$2.37 \times 10^6$	Step insert. Station 1. Blow-by failure.
2349	17.64	2	20 in.	$2.48 \times 10^6$	Repeat of 2343.
2350	17.68	2	20 in.	$2.31 \times 10^6$	Traversing rake.
2352	17.58	2	20 in.	$2.30 \times 10^6$	Calibration rake. Station 1. Quick ramp of Po and To. Diffuser probes added.
2353	17.47	2	20 in.	$2.19 \times 10^6$	Calibration rake. Station 1. High To.
2354	14	NA	-----	$2.00 \times 10^6$	Calibration rake. Station 1. Diffuser study.
2358	17.45	2	20 in.	$2.03 \times 10^6$	17.45

Model Position (inches from nozzle exit):  
 Station 1 = 24, Station 2 = 67, Station 3 = 110

TABLE 3. RUN MATRIX (CONTINUED)

Run #	Nominal Mach #	Hardware Set	Core	Reynolds No. (1/ft)	Comments
2370	18.01	2	28	$2.09 \times 10^6$	Calibration rake. Station 1. Boundary layer rakes and tufts added. 1st run after Mach 8.
2371	18.68	2	18	$3.21 \times 10^6$	Calibration rake. Station 1. Low To.
2372	17.61	2	20	$2.32 \times 10^6$	Repeat of 2370.
2373	16.49	3-mod	24	$2.61 \times 10^6$	Calibration rake. Station 1.
2374	16.59	3-mod	24	$2.65 \times 10^6$	Repeat of 2373.
2375	17.25	6	26	$2.51 \times 10^6$	Calibration rake. Station 1.
2376	17.35	6	24	$2.55 \times 10^6$	Repeat of 2375.
2377	16.66	3-mod	28	$2.58 \times 10^6$	Calibration rake. Station 2.
2378	17.63	3-mod	40	$2.63 \times 10^6$	Calibration rake. Station 3. 1st run after heater dismantled for in-house study and heater element replaced.
2379	16.73	3-mod	30	$2.54 \times 10^6$	Calibration rake. Station 3.
2385	16.56	3-mod	24	$2.70 \times 10^6$	Blunt Cone.

Model Position (inches from nozzle exit):  
 Station 1 = 24, Station 2 = 67, Station 3 = 110

TABLE 4. TUNNEL 9 FLOW UNIFORMITY CALIBRATION FOR RUN 2274

WTR 1604, RUN 2274, STATION 24 inches							
MACH = 17.45		P0 = 21948. psia		T0 = 2867. degF		PTAVG = 4.94 psia	
		NOMINAL FREESTREAM CONDITIONS					
MACH	QINF	TINF	PINF	REINF	UINF	RHOINF	VIP
	psia	degR	psia	1/ft	ft/sec	lbm/ft3	ft**1/2
17.45	2.684	63.8	1.26E-02	2.13E+06	6950.	5.15E-04	1.20E-02

		PROFILES NORMALIZED TO NOMINAL								
		PT	M	Q	T	P	RE	U	RHO	VIP
Probe #	Dist. from center (in)									
1	-24.00	0.259	1.317	0.259	0.581	0.149	0.439	1.003	0.257	1.988
2	-22.00	0.378	1.219	0.378	0.676	0.254	0.553	1.003	0.376	1.640
3	-20.00	0.516	1.144	0.516	0.766	0.394	0.668	1.002	0.514	1.400
4	-18.00	0.641	1.095	0.641	0.836	0.535	0.763	1.001	0.639	1.254
5	-16.00	0.731	1.066	0.731	0.882	0.644	0.827	1.001	0.730	1.173
6	-14.00	0.887	1.025	0.887	0.953	0.845	0.930	1.000	0.886	1.063
7	-12.00	0.966	1.007	0.966	0.986	0.953	0.979	1.000	0.966	1.018
8	-10.00	0.999	1.000	0.999	1.000	0.999	1.000	1.000	0.999	1.000
9*	-8.00	1.001	1.000	1.001	1.000	1.001	1.000	1.000	1.001	1.000
10	-6.00	0.992	1.002	0.992	0.997	0.988	0.995	1.000	0.992	1.004
11	-4.00	1.009	0.998	1.009	1.004	1.013	1.006	1.000	1.009	0.995
12	-2.00	1.014	0.997	1.014	1.006	1.020	1.008	1.000	1.014	0.993
13	0.00	0.974	1.005	0.974	0.989	0.963	0.984	1.000	0.973	1.014
14	2.00	0.991	1.002	0.991	0.996	0.987	0.994	1.000	0.991	1.005
15	4.00	1.001	1.000	1.001	1.000	1.001	1.001	1.000	1.001	1.000
16	6.00	0.993	1.001	0.993	0.997	0.990	0.996	1.000	0.993	1.004
17*	8.00	0.999	1.000	0.999	1.000	0.999	1.000	1.000	0.999	1.000
18	10.00	1.021	0.996	1.021	1.008	1.029	1.012	1.000	1.021	0.990
19	12.00	0.972	1.006	0.972	0.989	0.961	0.983	1.000	0.972	1.015
20	14.00	0.951	1.010	0.951	0.980	0.932	0.970	1.000	0.951	1.026
21	16.00	0.743	1.063	0.743	0.887	0.658	0.834	1.001	0.742	1.163
22	18.00	0.655	1.090	0.655	0.843	0.551	0.773	1.001	0.653	1.240
23	20.00	0.535	1.136	0.536	0.778	0.415	0.684	1.002	0.534	1.374
24	22.00	0.403	1.203	0.404	0.694	0.279	0.575	1.003	0.401	1.586
25	24.00	0.270	1.305	0.271	0.591	0.159	0.451	1.003	0.269	1.943

\* - Averaged to determine PTAVG and nominal conditions.



TABLE 5. TUNNEL 9 FLOW UNIFORMITY CALIBRATION FOR RUN 2343

WTR 1604, RUN 2343, STATION 24 inches									
MACH = 17.68		P0 = 23029. psia		T0 = 2780. degF		PTAVG = 5.02 psia			
MACH	QINF psia	TINF degr	NOMINAL FREESTREAM CONDITIONS				RHOINF lbm/ft3	VIP ft**1/2	
			PINF psia	REINF 1/ft	UINF ft/sec	U			
17.68	2.723	60.7	1.24E-02	2.30E+06	6869.	5.35E-04	1.17E-02		
PROFILES NORMALIZED TO NOMINAL									
Probe #	Dist. from center (in)	PT	M	Q	T	P	RE	U	RHO
1	-24.00	0.227	1.352	0.227	0.551	0.124	0.405	1.004	0.225
2	-22.00	0.339	1.246	0.339	0.647	0.218	0.517	1.003	0.337
3	-20.00	0.465	1.169	0.466	0.735	0.341	0.628	1.002	0.464
4	-18.00	0.586	1.115	0.586	0.806	0.471	0.722	1.002	0.584
5	-16.00	0.679	1.082	0.679	0.856	0.580	0.790	1.001	0.678
6	-14.00	0.745	1.062	0.745	0.888	0.661	0.836	1.001	0.744
7	-12.00	0.941	1.013	0.941	0.976	0.918	0.964	1.000	0.940
8	-10.00	0.955	1.010	0.955	0.982	0.937	0.972	1.000	0.954
9*	-8.00	0.999	1.000	0.999	1.000	0.999	0.999	1.000	0.999
10	-6.00	0.982	1.004	0.982	0.993	0.975	0.989	1.000	0.982
11	-4.00	0.985	1.003	0.985	0.994	0.980	0.991	1.000	0.985
12	-2.00	0.990	1.002	0.990	0.996	0.986	0.994	1.000	0.990
13	0.00	0.969	1.006	0.969	0.988	0.957	0.981	1.000	0.969
14	2.00	0.975	1.005	0.975	0.990	0.965	0.985	1.000	0.975
15	4.00	0.973	1.006	0.973	0.989	0.962	0.983	1.000	0.973
16	6.00	0.983	1.003	0.983	0.993	0.976	0.990	1.000	0.983
17*	8.00	1.001	1.000	1.001	1.000	1.001	1.001	1.000	1.001
18	10.00	0.964	1.008	0.964	0.985	0.949	0.978	1.000	0.963
19	12.00	0.947	1.011	0.947	0.978	0.926	0.967	1.000	0.947
20	14.00	0.786	1.050	0.787	0.908	0.713	0.864	1.001	0.785
21	16.00	0.702	1.075	0.703	0.868	0.608	0.807	1.001	0.701
22	18.00	0.617	1.104	0.617	0.823	0.507	0.745	1.001	0.615
23	20.00	0.501	1.151	0.501	0.757	0.378	0.656	1.002	0.499
24	22.00	0.376	1.221	0.376	0.675	0.252	0.551	1.003	0.374
25	24.00	0.253	1.323	0.253	0.575	0.144	0.433	1.003	0.251

\* - Averaged to determine PTAVG and nominal conditions.

TABLE 6. TUNNEL 9 FLOW UNIFORMITY CALIBRATION FOR RUN 2374

WTR 1604, RUN 2374, STATION 24 inches										
MACH = 16.35		P0 = 21060. psia	T0 = 2765. degF	PTAVG = 6.60 psia						
MACH	QINF psia	3.583	NOMINAL FREESTREAM CONDITIONS							
			TINF degr	PINF psia	REINF 1/ft	UINF ft/sec	RHOINF lbm/ft3	VIP ft**1/2		
16.35			70.0	1.92E-02	2.65E+06	6820.	7.13E-04	1.01E-02		
Probe Dist. from center (in)			PROFILES NORMALIZED TO NOMINAL							
#	PT	M	Q	T	P	RE	U	RHO	VIP	
1	24.00	0.289	1.288	0.289	0.607	0.174	0.470	1.004	0.287	1.879
2	22.00	0.426	1.190	0.427	0.710	0.301	0.595	1.003	0.424	1.543
3	20.00	0.575	1.120	0.575	0.800	0.458	0.714	1.002	0.573	1.326
4	18.00	0.715	1.071	0.715	0.874	0.623	0.815	1.001	0.713	1.186
5	16.00	0.899	1.022	0.899	0.958	0.860	0.937	1.000	0.898	1.056
6	14.00	0.927	1.016	0.927	0.970	0.898	0.955	1.000	0.926	1.039
7	12.00	1.000	1.000	1.000	1.000	1.000	1.000	1.000	1.000	1.000
8	10.00	1.008	0.998	1.008	1.003	1.011	1.005	1.000	1.008	0.996
9*	8.00	1.000	1.000	1.000	1.000	1.000	1.000	1.000	1.000	1.000
10	6.00	0.993	1.001	0.993	0.997	0.990	0.996	1.000	0.993	1.004
11	4.00	1.001	1.000	1.001	1.000	1.001	1.001	1.000	1.001	1.000
12	2.00	0.966	1.007	0.966	0.986	0.952	0.979	1.000	0.966	1.018
13	0.00	0.951	1.010	0.951	0.980	0.931	0.970	1.000	0.950	1.026
14	-2.00	0.971	1.006	0.971	0.988	0.960	0.982	1.000	0.971	1.015
15	-4.00	1.013	0.997	1.012	1.005	1.018	1.008	1.000	1.013	0.994
16	-6.00	1.002	1.000	1.002	1.001	1.003	1.001	1.000	1.002	0.999
17*	-8.00	1.000	1.000	1.000	1.000	1.000	1.000	1.000	1.000	1.000
18	-10.00	0.998	1.000	0.998	0.999	0.997	0.999	1.000	0.998	1.001
19	-12.00	0.947	1.011	0.947	0.978	0.926	0.967	1.000	0.946	1.028
20	-14.00	0.911	1.019	0.911	0.963	0.876	0.945	1.000	0.910	1.049
21	-16.00	0.771	1.055	0.771	0.901	0.694	0.854	1.001	0.770	1.141
22	-18.00	0.654	1.091	0.654	0.843	0.550	0.772	1.001	0.652	1.241
23	-20.00	0.517	1.144	0.517	0.767	0.395	0.669	1.002	0.515	1.399
24	-22.00	0.379	1.219	0.379	0.677	0.255	0.554	1.003	0.377	1.638
25	-24.00	0.244	1.333	0.244	0.567	0.137	0.424	1.004	0.242	2.049

\* - Averaged to determine PTAvg and nominal conditions.

MACH = 16.39    P0 = 20625. psia    T0 = 2750. degF    PTAVG = 6.38 psia

MACH	NOMINAL FREESTREAM CONDITIONS							RHOINF lbm/ft3	VIP ft**1/2
	QINF psia	TINF degr	PINF psia	REINF 1/ft	UINF ft/sec	U	RHO		
16.39	3.462	69.3	1.84E-02	2.59E+06	6799.		6.93E-04	1.02E-02	
PROFILES NORMALIZED TO NOMINAL									
Probe #	Dist. from center (in)	PT	M	Q	T	P	RE	U	VIP
1	24.00	0.278	1.298	0.278	0.598	0.165	0.459	1.004	1.916
2	22.00	0.398	1.207	0.398	0.690	0.273	0.571	1.003	1.597
3	20.00	0.539	1.135	0.539	0.780	0.418	0.686	1.002	1.370
4	18.00	0.764	1.057	0.764	0.897	0.684	0.849	1.001	1.147
5	16.00	0.899	1.022	0.899	0.958	0.861	0.937	1.000	1.056
6	14.00	0.999	1.000	0.999	1.000	0.999	1.000	1.000	1.000
7	12.00	0.995	1.001	0.995	0.998	0.992	0.997	1.000	1.003
8	10.00	0.995	1.001	0.995	0.998	0.993	0.997	1.000	1.002
9*	8.00	1.010	0.998	1.010	1.004	1.014	1.006	1.000	0.995
10	6.00	1.010	0.998	1.010	1.004	1.015	1.006	1.000	0.995
11	4.00	1.012	0.998	1.012	1.005	1.017	1.007	1.000	0.994
12	2.00	1.008	0.998	1.008	1.003	1.012	1.005	1.000	0.996
13	0.00	1.002	1.000	1.002	1.001	1.002	1.001	1.000	0.999
14	-2.00	1.002	1.000	1.002	1.001	1.003	1.001	1.000	0.999
15	-4.00	1.007	0.999	1.007	1.003	1.010	1.004	1.000	0.997
16	-6.00	1.013	0.997	1.013	1.005	1.018	1.008	1.000	0.994
17*	-8.00	0.990	1.002	0.990	0.996	0.986	0.994	1.000	1.005
18	-10.00	0.989	1.002	0.989	0.995	0.984	0.993	1.000	1.006
19	-12.00	0.989	1.002	0.989	0.996	0.985	0.994	1.000	1.005
20	-14.00	0.993	1.001	0.993	0.997	0.990	0.996	1.000	1.004
21	-16.00	0.868	1.030	0.868	0.944	0.819	0.917	1.001	1.075
22	-18.00	0.717	1.071	0.717	0.874	0.625	0.816	1.001	1.185
23	-20.00	0.500	1.152	0.500	0.757	0.377	0.656	1.002	1.423
24	-22.00	0.373	1.223	0.373	0.672	0.249	0.548	1.003	1.652
25	-24.00	0.244	1.333	0.244	0.567	0.138	0.424	1.004	2.047

\* - Averaged to determine P<sub>T</sub>AVG and nominal conditions.

TABLE 8. TUNNEL 9 FLOW UNIFORMITY CALIBRATION FOR RUN 2379

WTR 1604, RUN 2379, STATION 110 inches									
MACH = 16.73		P0 = 21123. psia	T0 = 2728. degF	PTAVG = 5.96 psia					
MACH	QINF	NOMINAL FREESTREAM CONDITIONS							
	psia	TINF degR	PINF psia	REINF 1/ft	UINF ft/sec	RHOINF lbm/ft3	VIP ft**1/2		
16.73	3.236	66.1	1.65E-02	2.54E+06	6783.	6.51E-04	1.05E-02		
PROFILES NORMALIZED TO NOMINAL									
Probe #	Dist. from center (in)	PT	M	Q	T	P	RE	U	RHO
1	24.00	0.308	1.272	0.308	0.622	0.190	0.488	1.003	0.306
2	22.00	0.451	1.176	0.452	0.726	0.326	0.616	1.002	0.449
3	20.00	0.692	1.078	0.692	0.862	0.595	0.799	1.001	0.690
4	18.00	0.907	1.020	0.907	0.962	0.872	0.942	1.000	0.907
5	16.00	0.989	1.002	0.989	0.996	0.985	0.993	1.000	0.989
6	14.00	0.999	1.000	0.999	1.000	0.999	1.000	1.000	0.999
7	12.00	1.004	0.999	1.004	1.002	1.006	1.002	1.000	1.004
8	10.00	1.009	0.998	1.009	1.003	1.012	1.005	1.000	1.009
9*	8.00	1.006	0.999	1.006	1.002	1.009	1.004	1.000	1.006
10	6.00	1.021	0.996	1.021	1.008	1.030	1.013	1.000	1.021
11	4.00	1.041	0.992	1.041	1.016	1.059	1.025	1.000	1.042
12	2.00	1.041	0.992	1.041	1.016	1.058	1.025	1.000	1.041
13	0.00	1.027	0.994	1.027	1.011	1.039	1.017	1.000	1.028
14	-2.00	1.024	0.995	1.024	1.010	1.034	1.015	1.000	1.024
15	-4.00	1.012	0.998	1.012	1.005	1.017	1.007	1.000	1.012
16	-6.00	1.000	1.000	1.000	1.000	1.000	1.000	1.000	1.000
17*	-8.00	0.994	1.001	0.994	0.998	0.991	0.996	1.000	0.994
18	-10.00	1.003	0.999	1.003	1.001	1.004	1.002	1.000	1.003
19	-12.00	0.991	1.002	0.991	0.996	0.988	0.995	1.000	0.991
20	-14.00	0.991	1.002	0.991	0.996	0.987	0.994	1.000	0.991
21	-16.00	0.968	1.007	0.968	0.987	0.956	0.981	1.000	0.968
22	-18.00	0.882	1.026	0.883	0.951	0.838	0.927	1.000	0.882
23	-20.00	0.628	1.100	0.628	0.829	0.519	0.753	1.002	0.626
24	-22.00	0.384	1.216	0.384	0.680	0.260	0.558	1.003	0.382
25	-24.00	0.242	1.335	0.242	0.565	0.136	0.422	1.004	0.240

\* - Averaged to determine PTAvg and nominal conditions.

TABLE 9. NOMINAL TEST CELL AND SUPPLY CONDITIONS FOR MACH 16.5

Freestream Mach	16.35
Freestream Reynolds No.	2.65 E06 /ft.
Supply Pressure	21060 psia
Supply Temperature	3225° R
Pitot Pressure	6.59 psia
Dynamic Pressure	3.58 psia
Freestream Pressure	0.019 psia
Freestream Temperature	70° R
Freestream Density	0.00071 lb/ft <sup>3</sup>
Freestream Velocity	6820 ft/sec
Degrees Supercooled	15° R
Run Time	3 - 3.5 seconds

TABLE 10. NOMINAL TEST CELL AND SUPPLY CONDITIONS FOR MACH 18

Freestream Mach	17.64
Freestream Reynolds No.	2.48 E06 /ft.
Supply Pressure	22770 psia
Supply Temperature	3120° R
Pitot Pressure	5.02 psia
Dynamic Pressure	2.71 psia
Freestream Pressure	0.013 psia
Freestream Temperature	58.6° R
Freestream Density	0.11156 lb/ft <sup>3</sup>
Freestream Velocity	6640 ft/sec
Degrees Supercooled	24° R
Run Time	3 - 3.5 seconds

## REFERENCES

1. Ragsdale, W. C., et al., *Hypervelocity Wind Tunnel 9 Facility Handbook*, Third Edition, NAVSWC TR 91-616, Jul 1993, NAVSWC, White Oak, MD.
2. Daum, F. L., and Gyarmathy, G., "Condensation of Air and Nitrogen in Hypersonic Wind Tunnels," *AIAA Journal*, Vol. 6, No. 3, Mar 1968, pp. 458-465.
3. Lederer, M., et al., W., "Condensation in Hypersonic Nitrogen Wind Tunnels," AIAA Paper No. 90-1392, AIAA 16th Aerodynamic Ground Testing Conference, Jun 1990.
4. Lafferty, J., NAVSWC Wind Tunnel Data Report, "WTR 1601 Supercooling II Flow Validation and Calibration," Mar 1991.
5. Marren, D. E., Lafferty, J. F., "Experimental Determination of the Limits of Supercooling in the Hypervelocity Wind Tunnel No. 9," AIAA Paper No. 94-0199, AIAA 32nd Aerospace Sciences Meeting, Jan 1994.
6. Lederer, M., NAVSWC Wind Tunnel Data Report, "WTR 1478 Tunnel 9 Supercooling," Jul 1988.
7. NSWCWODET K23 (M. Metzger) Memo, Subj: A Prototype For A Shape Stable Contour For The Tunnel 9 C-103 Mach 18 Nozzle Throat Insert, White Oak, MD, 13 Oct 1992.
8. Kammeyer, M. E., "Microtuft Flow Visualization at Mach 10 and 14 in the NSWC Hypervelocity Wind Tunnel No. 9," AIAA Paper No. 89-0041, AIAA 27th Aerospace Sciences Meeting, Jan 1989.
9. NSWC K24 (M. Lederer) Memo, Subj.: Uncertainty Analysis for Mach 16.5, White Oak, MD, 08 June 1994.
10. Marren, D., *WTR 1608 Hypervelocity Tunnel 9 Mach 10/14 Calibration*, NSWCDD/TR-92/160, Dec 1993, NAVSWC, White Oak, MD.
11. NSWCWODET K22 (S. Anandakrishnan) Memo, Subj: T9 Mach 18 Nozzle CFD Analysis, White Oak, MD, 17 May 1993.

**REFERENCE (CONTINUED)**

12. Korte, J., et al., "A Comparison of Experimental Data with CFD for the NSWC Hypervelocity Wind Tunnel #9 Mach 14 Nozzle," AIAA Paper No. 92-4010, AIAA 17th Aerospace Ground Testing Conference, Jul 1992.
13. Anandakrishnan, S., et al., "CFD Analysis of the High Mach Number Modification for the NSWCDD Hypervelocity Wind Tunnel No. 9," AIAA Paper No. 94-2603, 18th AIAA Aerospace Ground Testing Conference, Jun 1994.

## GLOSSARY

a	Velocity of the local speed of sound, ft/sec.
ALPHA	Angle of attack, deg.
AFC	Axial force coefficient.
CAFC	Corrected axial force coefficient.
CP	Pressure coefficient.
CPB	Base pressure coefficient.
$c_p$	Specific heat at constant pressure.
$c_v$	Specific heat at constant volume.
FA	Axial force, lb.
FN	Normal force, lb.
FY	Yaw force, lb.
M, MACH	Free-stream Mach number, $Mach = U_\infty/a$ .
MX	Rolling moment, in-lb.
MY	Pitching moment, in-lb.
MZ	Yawing moment, in-lb.
NFC	Normal force coefficient.
P, $P_\infty$	Free-stream static pressure, psia.
PMC	Pitching moment coefficient.
PTAVG	Average Pitot pressure, psia.
$P_o$	Tunnel supply pressure, psia.
$P_{o1}$	Tunnel equivalent -perfect-gas supply pressure, psia.
Pt	Pitot pressure, psia.
Q, $Q_\infty$	Free-stream dynamic pressure, psia.
Re, $Re_\infty$	Free-stream Reynolds number, 1/ft.
Rho, $Rho_\infty$	Free-stream density, lbm/ft <sup>3</sup> .
RMC	Rolling moment coefficient.
ST	Stanton number.
T, $T_\infty$	Free-stream static temperature, °F or °R.
ThetaS	Pitch angle of model support system, degrees.
$T_o$	Supply temperature, °F.
$T_{oA}$	Supply temperature thermocouple A, °F.
$T_{oB}$	Supply temperature thermocouple B, °F.
U, $U_\infty$	Free-stream velocity, ft/sec.
VIP	Viscous interaction parameter $[M/(Re^{1/2})]$ , ft <sup>1/2</sup> .
XCPP	Pitch center of pressure, fraction of model length aft of nose.
XCPY	Yaw center of pressure, fraction of model length aft of nose.
YFC	Yaw force coefficient.
YMC	Yawing moment coefficient.
YTRAV	Traversing probe distance from tunnel centerline, in.
$\gamma$	Ratio of specific heats, $c_p/c_v$ .



## APPENDIX A

### DIAGNOSTIC MACH 18 RUNS

The first run on hardware set 2 produced an unexpected flow profile. This run had a higher Mach number, a larger core size and smaller deviations in flow properties. A series of runs were made to resolve this anomaly. A number of possible causes for the anomaly were identified. Each of these factors and the tests run to determine their impact on flow quality are described below.

#### EFFECT OF THROAT HARDWARE CONTOUR CHANGES

The first theory to explain the flow anomalies focussed on changes to throat contours. As discussed earlier, the throat contour changes during the initial runs on a new set of hardware. These changes result from the high operating temperatures and long run times associated with Tunnel 9.

#### NEW THROAT

Since the NASP model was in place for run 2338 there was no calibration rake data obtained for the first four runs on hardware set 2. Since the largest throat contour change occurs during the first run, it was decided to use run 2347 as a calibration run in the first window station using hardware set 3. This was the first run on this set of hardware. Data is shown in Figure A-1 and Table A-1. Although the flow profile was comparable to run 2343, it did not repeat as well as expected. The profile for run 2343 has smaller deviations of -4.5 percent to +0.1 percent as compared to the deviations for run 2347 that are -13.0 percent to +0.3 percent. Since the throat of hardware set 2 had already taken its set in contour it was decided to return to set 2.

## STEP INSERT

As the throat contour changes during the initial runs on the hardware, a discontinuity develops between the throat piece and the screwed insert (parts 2 and 3 in Figure A-2). To determine if this step could appreciably alter the flow profile run 2348 was made with an insert designed to eliminate the step (Figure A-3). The calibration data indicates that the flow profile was unaffected by the insert

Runs 2347 (first run on throat 3) and 2348 (throat 2 with step insert) were more repeatable with one another than with the nominal run (2343). Run 2349 was intended to be a repeat of run 2343. It was observed that the flow in run 2349 repeated the profile observed in run 2347 rather than that of run 2343. Data is shown in Figure A-4 and Table A-2. The Pitot pressure deviations are -10.8 percent to +6.5 percent.

From these runs it was determined that run 2343 had been an anomaly similar to run 2338. Although measurable dimensional changes are present, they do not alter the flow profile appreciably. Considering these results along with the results from runs 2347 to 2349, evidently the anomaly was not attributable to changes in throat contour.

## EFFECT OF BLOCKAGE

Blockage was the next issue investigated to explain the anomalies observed. If tunnel blockage were occurring, it could cause the flow to separate from the tunnel walls thus reducing the core size and changing the flow profile. It is also possible that blocked flow could change the character of the flow in the diffuser section. To examine the blockage issue a run was made with an essentially empty tunnel and probes were installed to check the performance of the diffuser.

## RUNNING WITH A CLEAR TUNNEL

For run 2350 the calibration rake was removed and all test cell windows were replaced with blank inserts contoured to match the test cell curvature. The sector blade was lowered beneath the test cell and the slots leading to the test cell under carriage were covered. The only flow disturbances were the vertically traversing rake and two strut mounted Pitot probes. The measurements from the traversing rake revealed a flow profile similar to that of run 2349 with a 20-inch core.

## DIFFUSER EFFICIENCY

Cone static probes were installed in the tunnel diffuser pipe before run 2352 to investigate the diffuser efficiency. For comparison, diffuser data were acquired at Mach 14 with a Reynolds number of two million per foot. The diffuser data matched very well. A sharp cone was installed for run 2358 to change the flow profile entering the diffuser. Again, the Mach 18 diffuser data agreed with the Mach 14 diffuser data and no correlations were found.

Later in this program, another run (2370) repeated the anomalous runs. Data from this run is contained in Figure A-5 and Table A-3. The profile has a core of approximately 28 inches and variations in flow properties of -7.0 percent to +0.8 percent. Diffuser probe data from this anomalous run was compared to a run that had a smaller core and larger deviations in flow properties (run 2372). Figure A-6 shows the ratio of Pitot pressure to static pressure from one probe for these runs. Clearly the diffuser probe is unaffected by the phenomenon causing the anomaly. The other diffuser probes showed this same trend. From this data it was determined that the flow anomaly is not related to diffuser operation.

In terms of blockage, the tunnel start-up process behaved as expected. The data showed that the tunnel was not suffering from blockage or hard starts during the Mach 18 runs.

## BOUNDARY-LAYER STATE

The state of the boundary layer was investigated to determine if it could be producing the anomalies observed. The issues examined were possible separation and relaminarization. Thermocouples were installed along the nozzle wall to obtain heat transfer data. Boundary layer rakes and fluorescent microtufts were added prior to run 2370. Computational Fluid Dynamics (CFD) analysis confirmed that the heat transfer data indicated a turbulent boundary layer along the length of the nozzle for all Mach 18 runs.

Figure A-7 displays representative Pitot pressure data from a boundary layer rake. Figure A-8 is a photograph of a section of the test cell wall with microtufts applied. The pressure measurements and flow visualization showed no localized regions of separation.

## INVESTIGATION OF START-UP PROCESS

Two different theories were developed concerning the supply conditions during the tunnel start-up phase. One theory dealt with higher supply temperatures while the other involved lower supply temperatures. Each of these will be addressed separately.

### HIGHER SUPPLY TEMPERATURES

Early in the tunnel start-up process the flow is in a condensed state as it is expanding. The flow eventually crosses over the experimental condensation onset curve into a noncondensed state. This process is illustrated in the pressure temperature diagram of Figure A-9. The data shown is from run 2349. The arrows indicate the direction for increasing time. The data points are equally spaced in time. The saturation line and experimental onset curve are also shown. The traces of supply conditions from run 2338 indicate that perhaps the flow had slightly more energy available in this critical start-up phase to push the flow into the noncondensed region and more fully expand. To accelerate the tunnel starting process and increase the available energy, runs 2352 and 2353 were made with higher supply conditions. However, these flow profiles did not repeat the flow profile observed during run 2338.

### LOWER SUPPLY TEMPERATURES

Typical calibration rake data shows that approximately 0.8 seconds after tunnel start, the flow snaps into a profile with a 30-inch core and a nominal Mach number of 19. This profile lasts for approximately 0.3 seconds. The flow then snaps into a profile with a 20-inch core and a nominal Mach number of 17.5 for the remainder of the run. During the start-up process the supply conditions are ramping up to the required run conditions. During the period of Mach 19 flow the supply temperature has not yet reached it's full running level. Run 2371 was made to investigate the effect of low supply temperature on the flow profile. Not surprisingly, the data showed that the flow profile worsened with decreasing supply temperature.

## **OVERSIZED CONTOUR**

The oversized contour of hardware set 6 was tested during run 2375. The profile is different from that of the other Mach 18 sets. The core size is approximately 26 inches while the Pitot pressure is 5.26 psia with a deviation of -4.8 percent to +1.6 percent as shown in Figure A-10 and Table A-4. The flow profile of run 2375 was duplicated with run 2376. The profile had very sharp corners at the boundary layer that is not typical of flow in Tunnel 9. The flow produced by modified set 3 seemed more consistent with the typical shape observed in Tunnel 9 at lower Mach numbers and no further testing was conducted with hardware set 6.



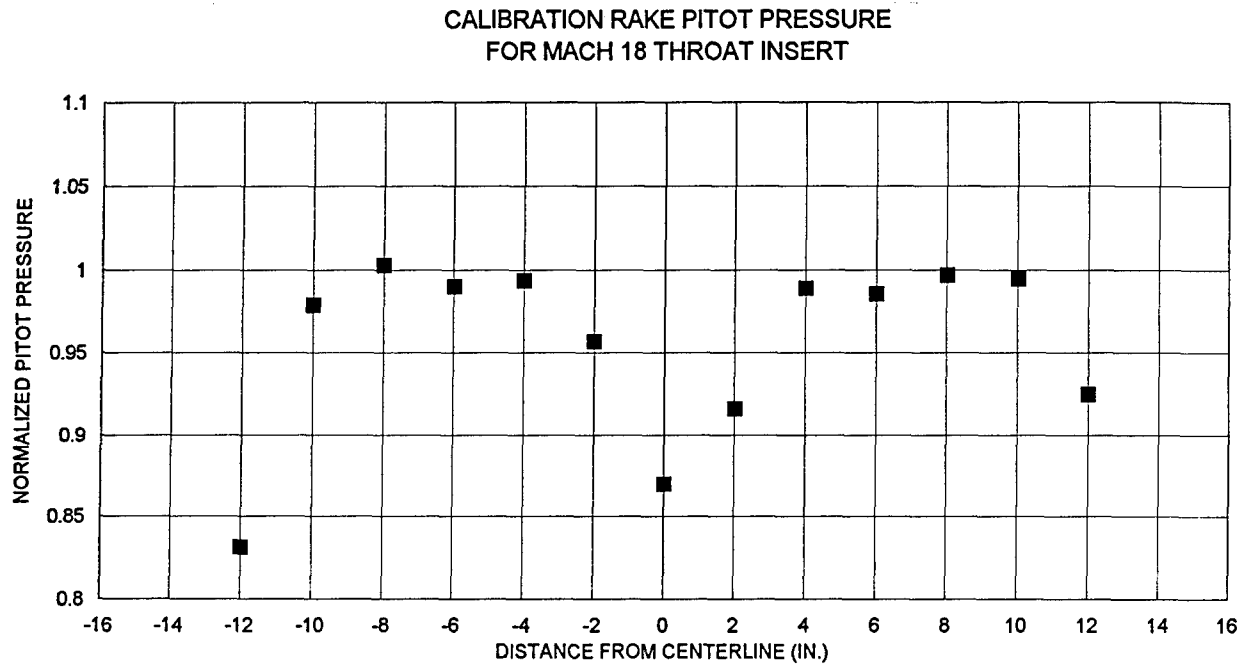


FIGURE A-1. NORMALIZED PITOT PRESSURE VS. DISTANCE FROM CENTERLINE  
FOR RUN 2347

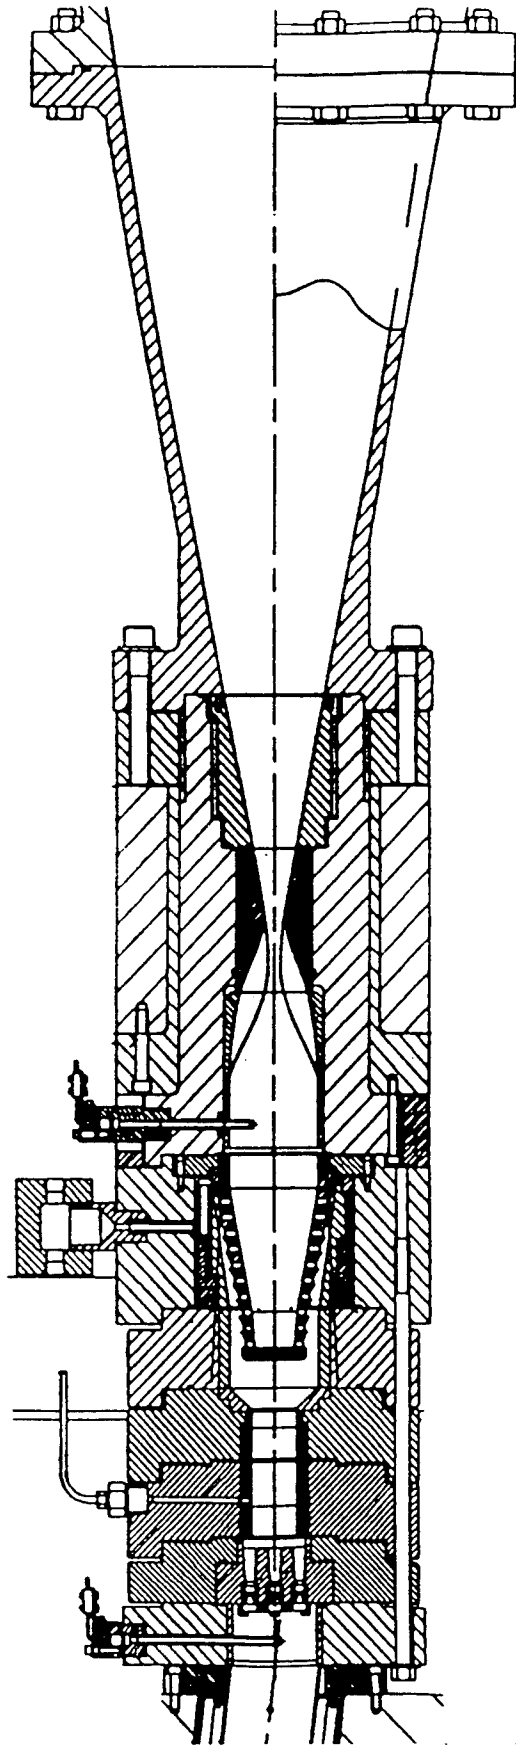


1                      2                      3

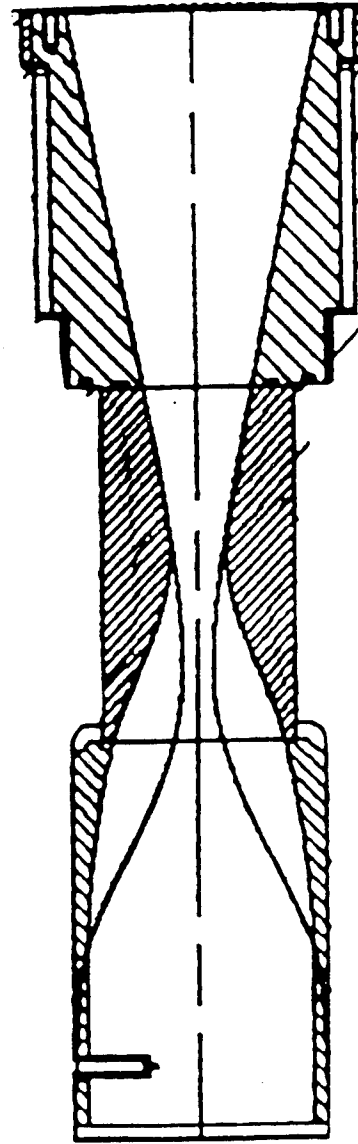

18 IN.

MACH 14 THROAT  
DIAMETER = 1.0 IN.  
MACH 16.5 THROAT  
DIAMETER = 0.6284 IN.  
MACH 18 THROAT  
DIAMETER = 0.526 IN.

FIGURE A-2. MACH 14 NOZZLE THROAT SECTION WITH MACH 18 INSERT





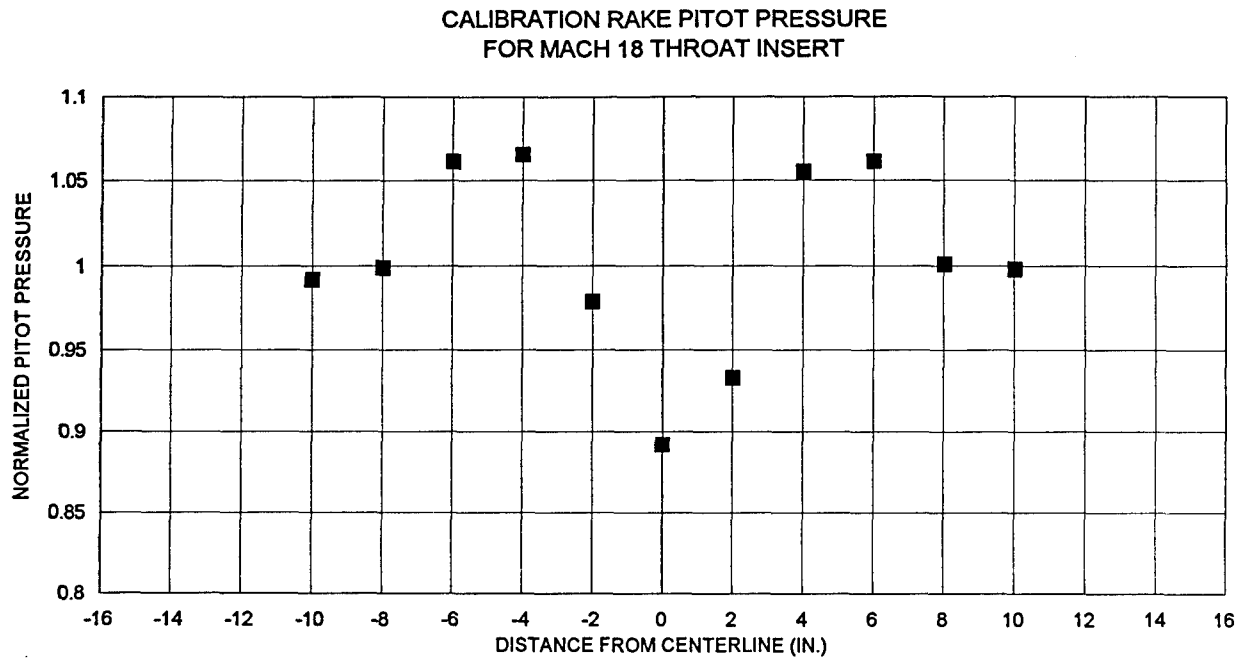


FIGURE A-4. NORMALIZED PITOT PRESSURE VS. DISTANCE FROM CENTERLINE  
FOR RUN 2349

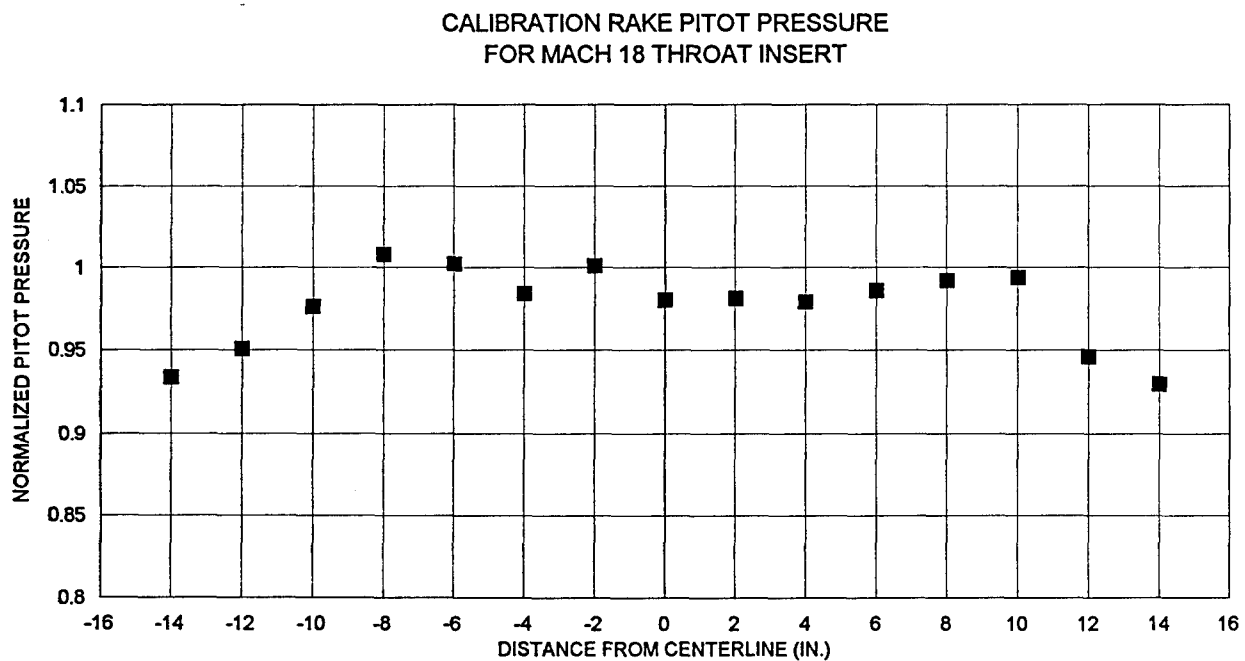


FIGURE A-5. NORMALIZED PITOT PRESSURE VS. DISTANCE FROM CENTERLINE  
FOR RUN 2370

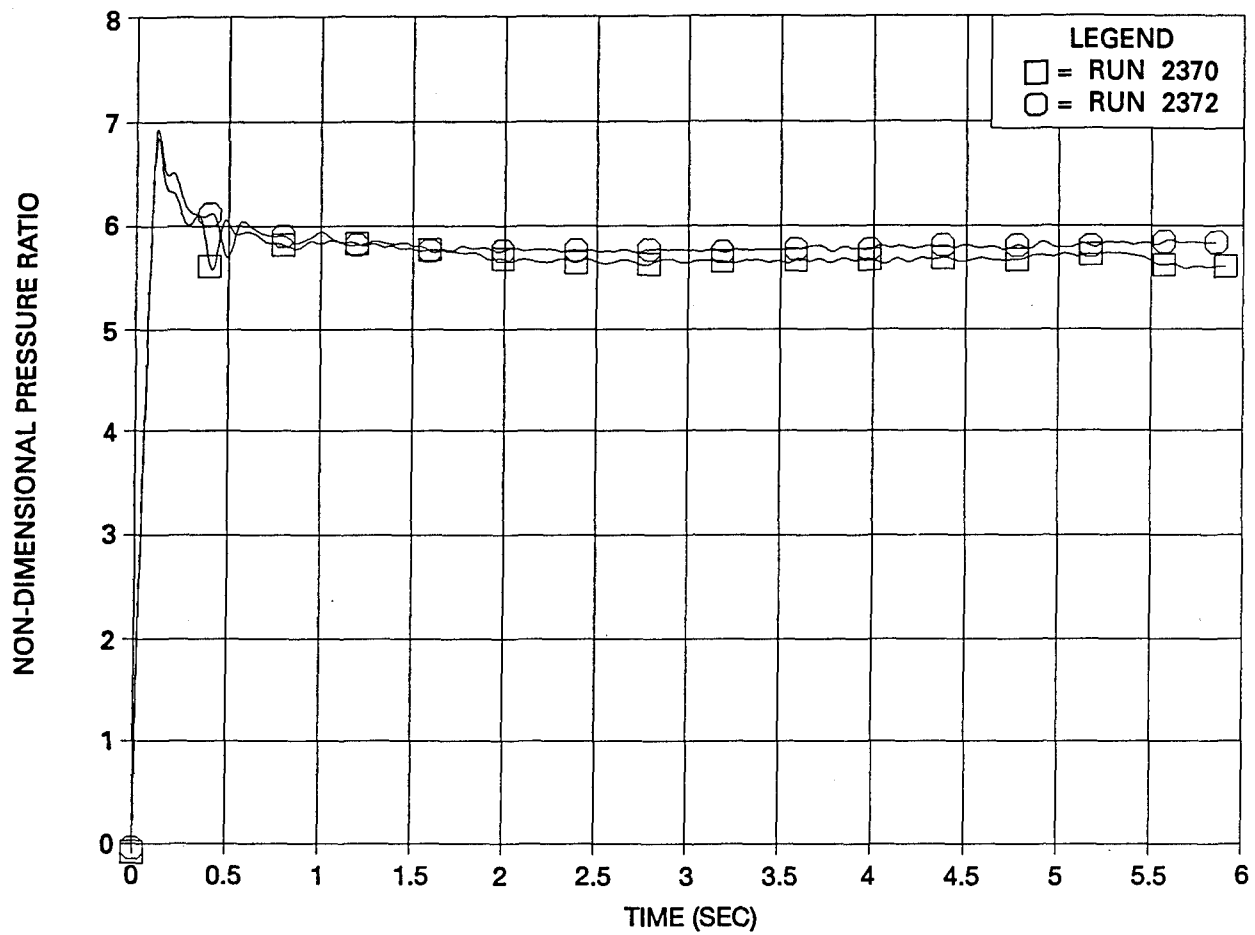


FIGURE A-6. DIFFUSER PROBE DATA

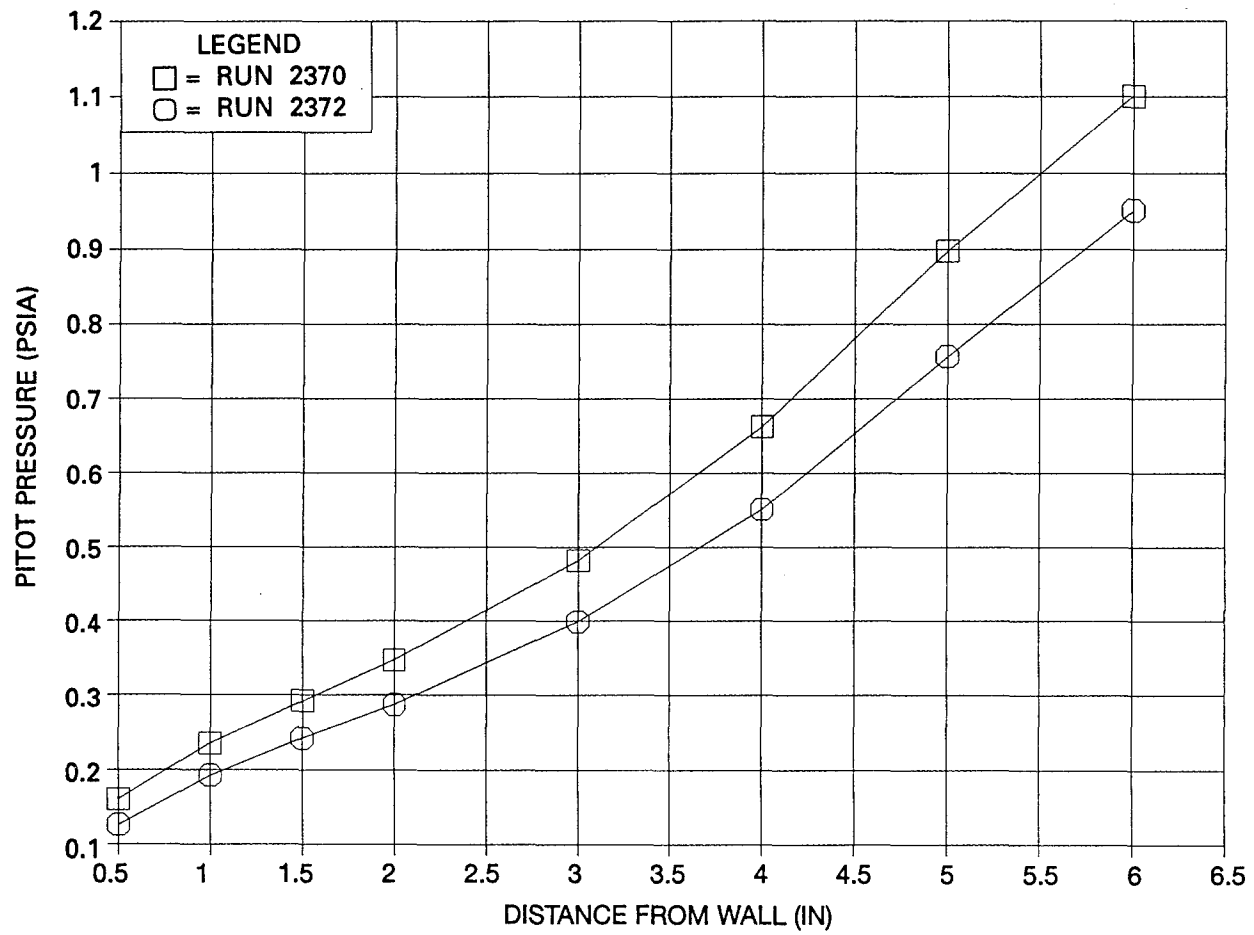


FIGURE A-7. BOUNDARY LAYER PITOT DATA

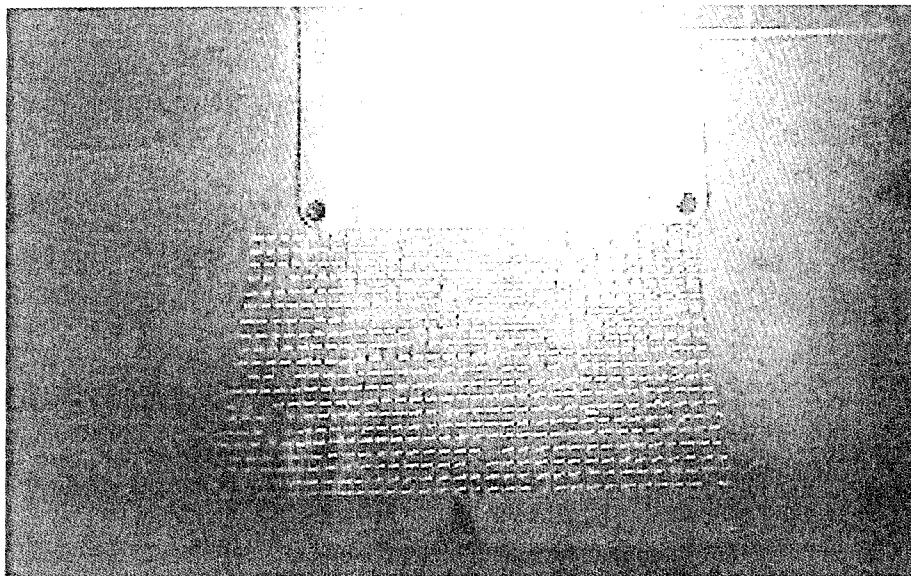


FIGURE A-8. PHOTOGRAPH OF MICROTUFTS

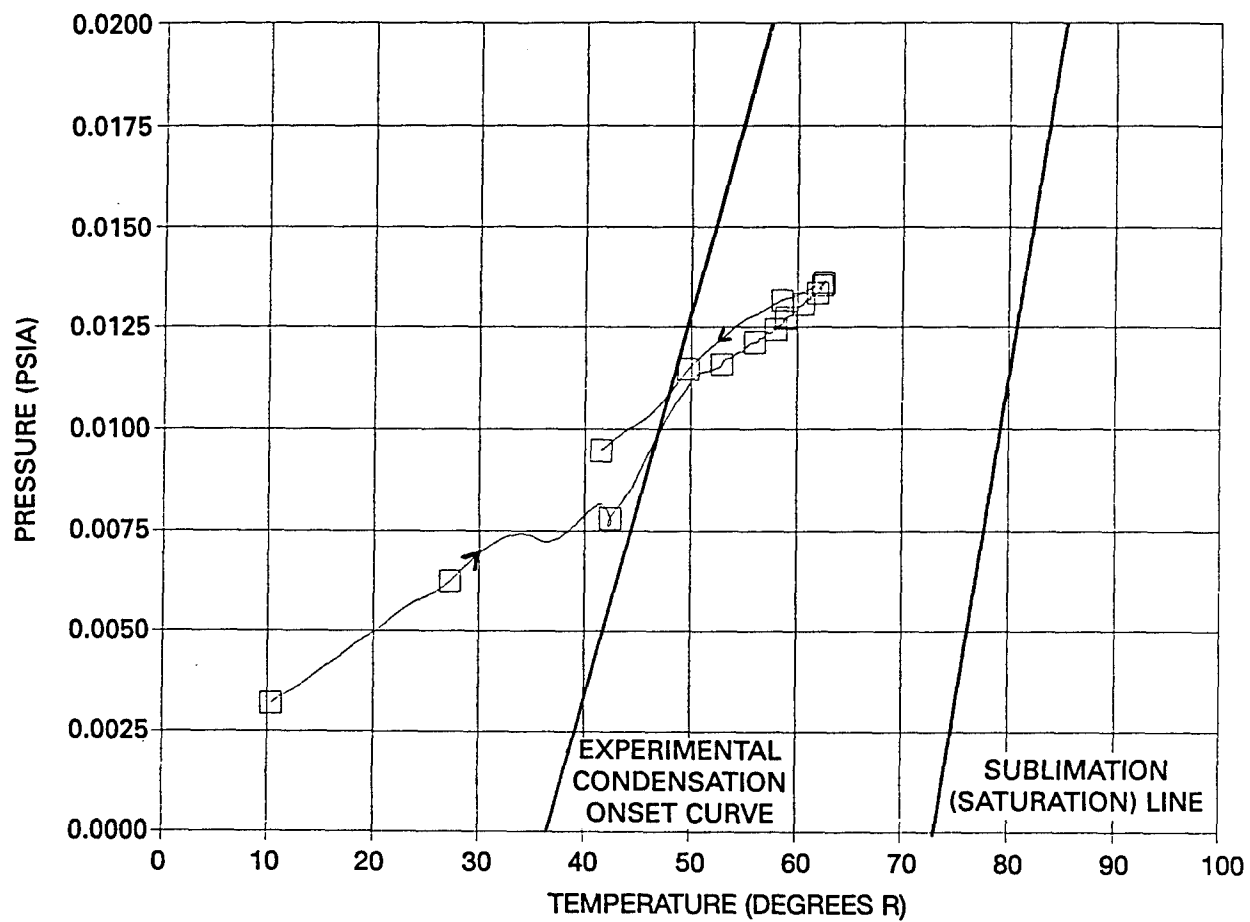


FIGURE A-9. TEST CELL PRESSURE VS. TEMPERATURE PLOT FOR MACH 18

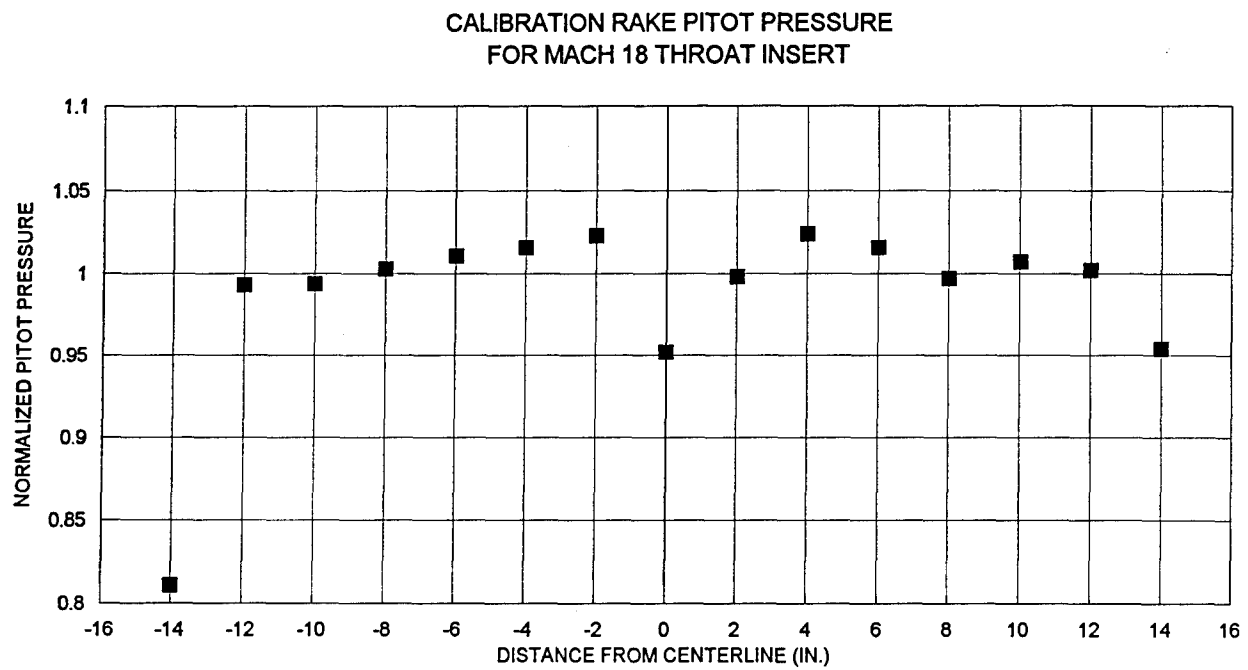


FIGURE A-10. NORMALIZED PITOT PRESSURE VS. DISTANCE FROM CENTERLINE  
FOR RUN 2375

TABLE A-1. TUNNEL 9 FLOW UNIFORMITY CALIBRATION FOR RUN 2347

WTR 1604, RUN 2347, STATION 24 inches									
MACH = 17.39		P0 = 22320. psia	T0 = 2646. degF	PTAVG = 5.38 psia					
MACH	QINF psia	2.923	NOMINAL FREESTREAM CONDITIONS						
			TINF degr	PINF psia	REINF 1/ft	UINF ft/sec	RHOINF lbm/ft3	VIP ft**1/2	
17.39			59.9	1.38E-02	2.56E+06	6710.	6.01E-04	1.09E-02	
PROFILES NORMALIZED TO NOMINAL									
Probe #	Dist. from center (in)	PT	M	Q	T	P	RE	U	RHO VIP
1	-24.00	0.210	1.374	0.210	0.534	0.111	0.387	1.004	0.208 2.209
2	-22.00	0.318	1.263	0.318	0.631	0.199	0.497	1.003	0.316 1.791
3	-20.00	0.442	1.181	0.443	0.720	0.317	0.609	1.002	0.440 1.514
4	-18.00	0.569	1.122	0.569	0.797	0.452	0.709	1.002	0.567 1.332
5	-16.00	0.676	1.083	0.676	0.854	0.577	0.788	1.001	0.675 1.220
6	-14.00	0.746	1.062	0.746	0.889	0.662	0.837	1.001	0.745 1.161
7	-12.00	0.831	1.038	0.831	0.928	0.771	0.894	1.001	0.830 1.098
8	-10.00	0.979	1.004	0.979	0.992	0.971	0.987	1.000	0.979 1.011
9*	-8.00	1.003	0.999	1.003	1.001	1.004	1.002	1.000	1.003 0.999
10	-6.00	0.990	1.002	0.990	0.996	0.985	0.994	1.000	0.989 1.005
11	-4.00	0.994	1.001	0.994	0.998	0.992	0.997	1.000	0.994 1.003
12	-2.00	0.957	1.009	0.957	0.983	0.940	0.974	1.000	0.957 1.022
13	0.00	0.870	1.029	0.870	0.945	0.822	0.919	1.000	0.869 1.074
14	2.00	0.916	1.018	0.917	0.966	0.884	0.948	1.000	0.916 1.045
15	4.00	0.989	1.002	0.989	0.996	0.984	0.993	1.000	0.989 1.006
16	6.00	0.986	1.003	0.986	0.994	0.981	0.992	1.000	0.986 1.007
17*	8.00	0.997	1.001	0.997	0.999	0.996	0.998	1.000	0.997 1.001
18	10.00	0.995	1.001	0.995	0.998	0.992	0.997	1.000	0.994 1.003
19	12.00	0.925	1.016	0.925	0.969	0.896	0.954	1.000	0.925 1.040
20	14.00	0.764	1.056	0.764	0.898	0.685	0.849	1.001	0.763 1.147
21	16.00	0.706	1.074	0.706	0.869	0.613	0.809	1.001	0.705 1.194
22	18.00	0.605	1.108	0.605	0.817	0.493	0.737	1.002	0.604 1.291
23	20.00	0.481	1.161	0.481	0.745	0.357	0.641	1.002	0.479 1.450
24	22.00	0.357	1.233	0.357	0.661	0.235	0.534	1.003	0.355 1.687
25	24.00	0.237	1.340	0.237	0.561	0.132	0.416	1.004	0.235 2.078

\* - Averaged to determine PTAVG and nominal conditions.

TABLE A-2. TUNNEL 9 FLOW UNIFORMITY CALIBRATION FOR RUN 2349

WTR 1604, RUN 2349, STATION 24 inches									
MACH = 17.64		P0 = 22770. psia	T0 = 2660. degF	PTAVG = 5.14 psia					
MACH	QINF psia	2.790	NOMINAL FREESTREAM CONDITIONS						
			TINF degr	PINF psia	REINF 1/ft	UINF ft/sec	RHOINF lbm/ft3	VIP ft**1/2	
17.64			58.6	1.28E-02	2.48E+06	6732.	5.70E-04	1.12E-02	
PROFILES NORMALIZED TO NOMINAL									
Probe #	Dist. from center (in)	PT	M	Q	T	P	RE	U	RHO
1	-24.00	0.201	1.386	0.201	0.525	0.105	0.376	1.004	0.199
2	-22.00	0.307	1.272	0.307	0.622	0.190	0.487	1.003	0.305
3	-20.00	0.433	1.186	0.433	0.714	0.308	0.601	1.002	0.431
4	-18.00	0.561	1.125	0.562	0.793	0.444	0.704	1.002	0.560
5	-16.00	0.671	1.085	0.671	0.852	0.570	0.784	1.001	0.669
6	-14.00	0.740	1.064	0.740	0.886	0.654	0.832	1.001	0.738
7	-12.00	0.779	1.052	0.779	0.904	0.703	0.859	1.001	0.778
8	-10.00	0.992	1.002	0.992	0.997	0.989	0.995	1.000	0.992
9*	-8.00	0.999	1.000	0.999	1.000	0.999	0.999	1.000	0.999
10	-6.00	1.061	0.988	1.061	1.024	1.086	1.036	1.000	1.061
11	-4.00	1.065	0.987	1.065	1.026	1.093	1.039	1.000	1.066
12	-2.00	0.979	1.004	0.979	0.991	0.970	0.987	1.000	0.979
13	0.00	0.892	1.024	0.892	0.955	0.852	0.933	1.000	0.892
14	2.00	0.933	1.014	0.933	0.973	0.908	0.959	1.000	0.933
15	4.00	1.055	0.989	1.054	1.022	1.078	1.033	1.000	1.055
16	6.00	1.061	0.988	1.061	1.024	1.087	1.037	1.000	1.062
17*	8.00	1.001	1.000	1.001	1.000	1.001	1.001	1.000	1.001
18	10.00	0.998	1.000	0.998	0.999	0.997	0.999	1.000	0.998
19	12.00	0.797	1.047	0.797	0.913	0.726	0.871	1.001	0.796
20	14.00	0.758	1.058	0.758	0.895	0.677	0.845	1.001	0.757
21	16.00	0.705	1.074	0.706	0.869	0.612	0.809	1.001	0.704
22	18.00	0.605	1.108	0.606	0.817	0.493	0.737	1.001	0.604
23	20.00	0.478	1.162	0.478	0.743	0.354	0.638	1.002	0.476
24	22.00	0.350	1.238	0.351	0.656	0.229	0.528	1.003	0.349
25	24.00	0.231	1.347	0.231	0.555	0.127	0.410	1.004	0.230

\* - Averaged to determine PTAvg and nominal conditions.



TABLE A-3. TUNNEL 9 FLOW UNIFORMITY CALIBRATION FOR RUN 2370

WTR 1604, RUN 2370, STATION 24 inches									
MACH = 17.98		P0 = 21685. psia		T0 = 2757. degF		PTAVG = 4.31 psia			
NOMINAL FREESTREAM CONDITIONS									
MACH	QINF psia	TINF degr	PINF psia	REINF 1/ft	UINF ft/sec	RHOINF lbm/ft3	VIP ft**1/2		
17.98	2.339	58.0	1.03E-02	2.07E+06	6830.	4.64E-04	1.25E-02		

PROFILES NORMALIZED TO NOMINAL		P		T		Q		M		PT		Dist. from center (in)	
Probe #	Dist. from center (in)	RE	U	RHO	VIP	RE	P	T	Q	M	PT	Dist. from center (in)	Dist. from center (in)
1	-24.00	0.440	1.003	0.258	1.984	0.150	0.581	0.259	1.316	0.259	0.259	0.259	0.259
2	-22.00	0.559	1.002	0.383	1.624	0.261	0.681	0.385	1.215	0.385	0.385	0.385	0.385
3	-20.00	0.673	1.002	0.520	1.391	0.401	0.770	0.522	1.142	0.522	0.522	0.522	0.522
4	-18.00	0.770	1.001	0.649	1.244	0.546	0.841	0.651	1.092	0.651	0.650	0.650	0.650
5	-16.00	0.862	1.001	0.782	1.132	0.709	0.906	0.783	1.051	0.783	0.783	0.783	0.783
6	-14.00	0.960	1.000	0.934	1.035	0.909	0.973	0.934	1.014	0.934	0.934	0.934	0.934
7	-12.00	0.970	1.000	0.951	1.026	0.932	0.980	0.951	1.010	0.951	0.951	0.951	0.951
8	-10.00	0.985	1.000	0.975	1.013	0.966	0.990	0.976	1.005	0.976	0.976	0.976	0.976
9*	-8.00	1.005	1.000	1.008	0.996	1.012	1.003	1.008	1.008	1.008	1.008	1.008	1.008
10	-6.00	1.001	1.000	1.002	0.999	1.003	1.001	1.002	1.000	1.002	1.002	1.002	1.002
11	-4.00	0.990	1.000	0.984	1.008	0.977	0.993	0.984	1.003	0.984	0.984	0.984	0.984
12	-2.00	1.001	1.000	1.001	0.999	1.002	1.001	1.001	1.000	1.001	1.001	1.001	1.001
13	0.00	0.988	1.000	0.980	1.010	0.972	0.992	0.980	1.004	0.980	0.980	0.980	0.980
14	2.00	0.988	1.000	0.981	1.010	0.973	0.992	0.981	1.004	0.981	0.981	0.981	0.981
15	4.00	0.987	1.000	0.979	1.011	0.970	0.991	0.979	1.004	0.979	0.979	0.979	0.979
16	6.00	0.986	1.000	0.986	1.007	0.981	0.995	0.986	1.003	0.986	0.986	0.986	0.986
17*	8.00	0.995	1.000	0.992	1.004	0.988	0.997	0.992	1.002	0.992	0.992	0.992	0.992
18	10.00	0.997	1.000	0.994	1.003	0.992	0.998	0.994	1.001	0.994	0.994	0.994	0.994
19	12.00	0.966	1.000	0.945	1.029	0.924	0.978	0.946	1.011	0.946	0.946	0.946	0.946
20	14.00	0.957	1.000	0.929	1.038	0.903	0.971	0.930	1.015	0.930	0.930	0.930	0.930
21	16.00	0.886	1.001	0.819	1.106	0.756	0.923	0.820	1.041	0.820	0.820	0.820	0.820
22	18.00	0.792	1.001	0.680	1.215	0.583	0.857	0.682	1.081	0.682	0.682	0.682	0.682
23	20.00	0.704	1.002	0.561	1.340	0.445	0.793	0.562	1.125	0.562	0.562	0.562	0.562
24	22.00	0.598	1.002	0.428	1.535	0.305	0.712	0.430	1.187	0.430	0.430	0.430	0.430
25	24.00	0.471	1.003	0.289	1.872	0.176	0.609	0.291	1.286	0.291	0.291	0.291	0.291

\* - Averaged to determine PTAVG and nominal conditions.

TABLE A-4. TUNNEL 9 FLOW UNIFORMITY CALIBRATION FOR RUN 2375

WTR 1604, RUN 2375, STATION 24 inches									
MACH = 17.24 P0 = 21090. psia T0 = 2615. degF PTAvg = 5.26 psia									
MACH	QINF psia	TINF deg	NOMINAL FREESTREAM CONDITIONS					RHOINF lbm/ft3	VIP ft**1/2
			PINF psia	REINF 1/ft	UINF ft/sec	U	RHO		
17.24	2.856	60.0	1.37E-02	2.51E+06	6660.	5.96E-04	1.09E-02		
Probe #	Dist. from center (in)	PT	PROFILES NORMALIZED TO NOMINAL						
			M	Q	T	P	RE	U	VIP
1	24.00	0.257	1.319	0.257	0.579	0.148	0.437	1.004	1.995
2	22.00	0.378	1.219	0.378	0.676	0.254	0.553	1.003	1.639
3	20.00	0.519	1.143	0.519	0.768	0.398	0.671	1.002	1.395
4	18.00	0.662	1.088	0.662	0.847	0.560	0.778	1.001	1.233
5	16.00	0.771	1.055	0.771	0.901	0.693	0.854	1.001	1.141
6	14.00	0.954	1.010	0.954	0.981	0.936	0.972	1.000	1.024
7	12.00	1.002	1.000	1.002	1.001	1.002	1.001	1.000	0.999
8	10.00	1.007	0.999	1.007	1.003	1.010	1.004	1.000	0.997
9*	8.00	0.997	1.001	0.997	0.999	0.996	0.998	1.000	1.002
10	6.00	1.016	0.997	1.016	1.006	1.023	1.010	1.000	0.992
11	4.00	1.024	0.995	1.024	1.010	1.034	1.015	1.000	0.988
12	2.00	0.998	1.000	0.998	0.999	0.997	0.999	1.000	1.001
13	0.00	0.952	1.010	0.952	0.980	0.933	0.971	1.000	1.025
14	-2.00	1.023	0.995	1.023	1.009	1.032	1.014	1.000	0.989
15	-4.00	1.016	0.997	1.016	1.007	1.023	1.010	1.000	0.992
16	-6.00	1.011	0.998	1.011	1.004	1.015	1.006	1.000	0.995
17*	-8.00	1.003	0.999	1.003	1.001	1.004	1.002	1.000	0.998
18	-10.00	0.994	1.001	0.994	0.998	0.992	0.997	1.000	1.003
19	-12.00	0.993	1.001	0.993	0.997	0.990	0.996	1.000	1.004
20	-14.00	0.811	1.044	0.811	0.919	0.744	0.880	1.001	1.113
21	-16.00	0.731	1.066	0.731	0.881	0.643	0.826	1.001	1.173
22	-18.00	0.613	1.105	0.613	0.821	0.502	0.743	1.002	1.282
23	-20.00	0.480	1.161	0.480	0.744	0.356	0.640	1.002	1.452
24	-22.00	0.345	1.242	0.345	0.652	0.224	0.523	1.003	1.717
25	-24.00	0.222	1.359	0.222	0.546	0.120	0.400	1.004	2.150

\* - Averaged to determine PTAvg and nominal conditions.

## DISTRIBUTION

	<u>Copies</u>		<u>Copies</u>
<b>DOD ACTIVITIES (CONUS)</b>		NATIONAL AEROSPACE PLANE	
DEFENSE TECHNICAL INFORMATION		JOINT PROJECT OFFICE	
CENTER		WRIGHT PATTERSON AFB OH 45433	1
CAMERON STATION		ATTN GIFT AND EXCHANGE DIVISION	4
ALEXANDRIA VA 22304-6145	12	LIBRARY OF CONGRESS	
		WASHINGTON DC 20540	
ATTN CODE E29L	4		
COASTAL SYSTEMS STATION		<b>INTERNAL</b>	
DAHLGREN DIVISION		E231	2
NAVAL SURFACE WARFARE CENTER		E232	3
6703 WEST HIGHWAY 98		K24	1
PANAMA CITY FL 32407-7001		K24 (M LEDERER)	50
<b>NON-DOD ACTIVITIES</b>			
THE CNA CORPORATION			
P O BOX 16268			
4401 FORD AVENUE			
ALEXANDRIA VA 22301-0268	1		

REPORT DOCUMENTATION PAGE			Form Approved OMB No. 0704-0188	
Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.				
1. AGENCY USE ONLY (Leave blank)		2. REPORT DATE 5 December 1994		3. REPORT TYPE AND DATES COVERED FINAL
4. TITLE AND SUBTITLE HYPERVELOCITY WIND TUNNEL NUMBER 9 HIGH MACH NUMBER DEVELOPMENT PROGAM			5. FUNDING NUMBERS	
6. AUTHOR(S) Melissa A Lederer				
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Naval Surface Warfare Center Dahlgren Division White Oak Detachment (Code K24) 10901 New Hampshire Avenue Silver Spring, Maryland 20903-5640			8. PERFORMING ORGANIZATION REPORT NUMBER NSWCDD/TR-94/96	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)			10. SPONSORING/MONITORING AGENCY REPORT NUMBER	
11. SUPPLEMENTARY NOTES				
12a. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution unlimited.			12b. DISTRIBUTION CODE	
13. ABSTRACT (Maximum 200 words) <p>This report describes the results of the High Mach Number Development Program performed at the White Oak, Maryland site of the Dahlgren Division, Naval Surface Warfare Center. The goal of this program was to expand the capabilities of the Hypervelocity Wind Tunnel Number 9 (Tunnel 9) to include operation at Mach 18. The constraints of this program involved using the existing Mach 14 setup with as little modification as necessary.</p> <p>There were two major areas of interest for this program, the heater and the nozzle. The required supply temperature for Mach 18 operation is above the current capabilities of the Tunnel 9 Mach 14 heater. Utilizing supercooled flow conditions lowered the required supply temperature to within the Mach 14 heater capability. The current Mach 14 nozzle was used and the throat section was replaced with a new hardware set designed to achieve the correct nozzle throat-to-exit area ratio to obtain the higher Mach number.</p> <p>Forty-one runs were carried out in Tunnel 9 in support of this program. The Mach number capability in Tunnel 9 has been extended to Mach 16.5. For this condition the flow has a 30-inch test core with Pitot pressure deviations of -1.1% to +1.3% and 3.5 seconds of good run time. A Mach 18 capability has also been investigated. Research efforts to achieve acceptable Mach 18 conditions are continuing.</p>				
14. SUBJECT TERMS Heater                      Nozzle                      Throat-to-Exit Area Ratio Hypersonic                High Mach Number			15. NUMBER OF PAGES 84	
			16. PRICE CODE	
17. SECURITY CLASSIFICATION OF REPORT UNCLASSIFIED	18. SECURITY CLASSIFICATION OF THIS PAGE UNCLASSIFIED	19. SECURITY CLASSIFICATION OF ABSTRACT UNCLASSIFIED	20. LIMITATION OF ABSTRACT SAR	

### GENERAL INSTRUCTIONS FOR COMPLETING SF 298

The Report Documentation Page (RDP) is used in announcing and cataloging reports. It is important that this information be consistent with the rest of the report, particularly the cover and its title page. Instructions for filling in each block of the form follow. It is important to *stay within the lines* to meet *optical scanning requirements*.

**Block 1. Agency Use Only (Leave blank).**

**Block 2. Report Date.** Full publication date including day, month, and year, if available (e.g. 1 Jan 88). Must cite at least the year.

**Block 3. Type of Report and Dates Covered.** State whether report is interim, final, etc. If applicable, enter inclusive report dates (e.g. 10 Jun 87 - 30 Jun 88).

**Block 4. Title and Subtitle.** A title is taken from the part of the report that provides the most meaningful and complete information. When a report is prepared in more than one volume, repeat the primary title, add volume number, and include subtitle for the specific volume. On classified documents enter the title classification in parentheses.

**Block 5. Funding Numbers.** To include contract and grant numbers; may include program element number(s), project number(s), task number(s), and work unit number(s). Use the following labels:

C - Contract	PR - Project
G - Grant	TA - Task
PE - Program Element	WU - Work Unit Accession No.

**BLOCK 6. Author(s).** Name(s) of person(s) responsible for writing the report, performing the research, or credited with the content of the report. If editor or compiler, this should follow the name(s).

**Block 7. Performing Organization Name(s) and Address(es).** Self-explanatory.

**Block 8. Performing Organization Report Number.** Enter the unique alphanumeric report number(s) assigned by the organization performing the report.

**Block 9. Sponsoring/Monitoring Agency Name(s) and Address(es).** Self-explanatory.

**Block 10. Sponsoring/Monitoring Agency Report Number.** (If Known)

**Block 11. Supplementary Notes.** Enter information not included elsewhere such as: Prepared in cooperation with...; Trans. of...; To be published in... . When a report is revised, include a statement whether the new report supersedes or supplements the older report.

**Block 12a. Distribution/Availability Statement.**

Denotes public availability or limitations. Cite any availability to the public. Enter additional limitations or special markings in all capitals (e.g. NOFORN, REL, ITAR).

DOD - See DoDD 5230.24, "Distribution Statements on Technical Documents."  
DOE - See authorities.  
NASA - See Handbook NHB 2200.2  
NTIS - Leave blank.

**Block 12b. Distribution Code.**

DOD - Leave blank.  
DOE - Enter DOE distribution categories from the Standard Distribution for Unclassified Scientific and Technical Reports.  
NASA - Leave blank.  
NTIS - Leave blank.

**Block 13. Abstract.** Include a brief (*Maximum 200 words*) factual summary of the most significant information contained in the report.

**Block 14. Subject Terms.** Keywords or phrases identifying major subjects in the report.

**Block 15. Number of Pages.** Enter the total number of pages.

**Block 16. Price Code.** Enter appropriate price code (*NTIS only*)

**Blocks 17.-19. Security Classifications.** Self-explanatory. Enter U.S. Security Classification in accordance with U.S. Security Regulations (i.e., UNCLASSIFIED). If form contains classified information, stamp classification on the top and bottom of the page.

**Block 20. Limitation of Abstract.** This block must be completed to assign a limitation to the abstract. Enter either UL (unlimited) or SAR (same as report). An entry in this block is necessary if the abstract is to be limited. If blank, the abstract is assumed to be unlimited.